

OD Precision


Displacement sensors for precise
and comprehensive measurement tasks

SICK
Sensor Intelligence.

OD Precision – Displacement sensors for precise and comprehensive measurement tasks




Displacement sensors from the OD Precision series handle the most varied applications: regardless of whether rough or fine structured patterns are measured with a high degree of precision and resolution.

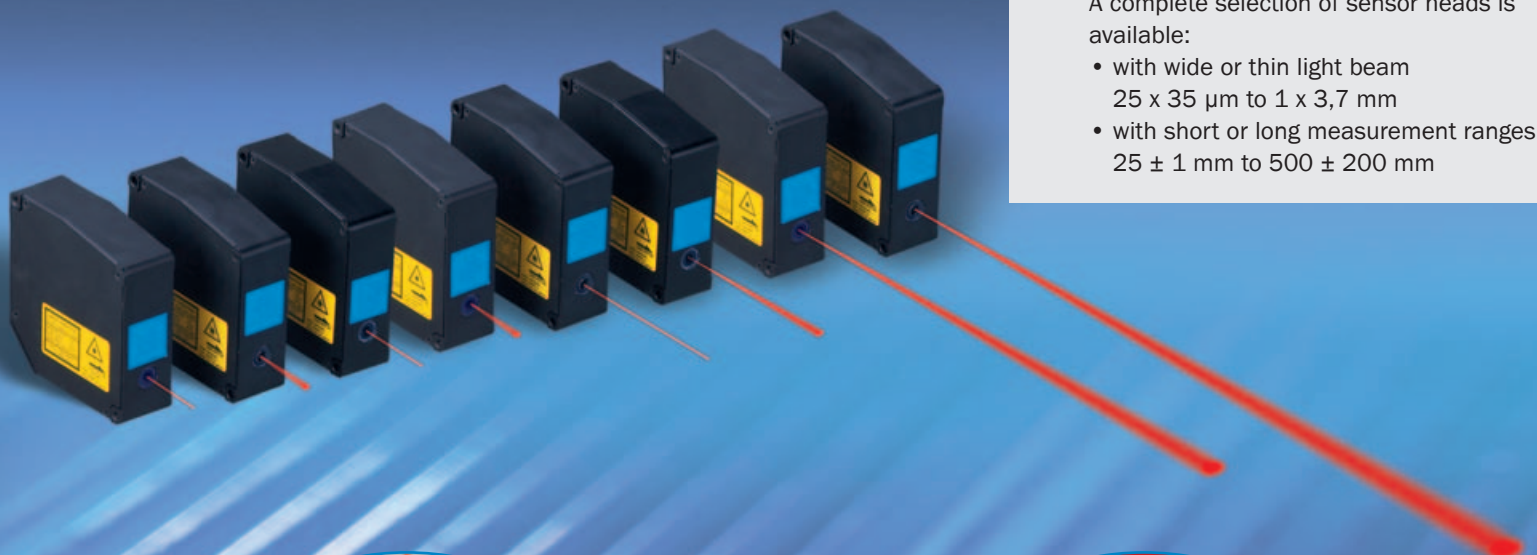


A complete selection of sensor heads is available:

- with wide or thin light beam
25 x 35 μm to 1 x 3,7 mm
- with short or long measurement ranges
25 \pm 1 mm to 500 \pm 200 mm

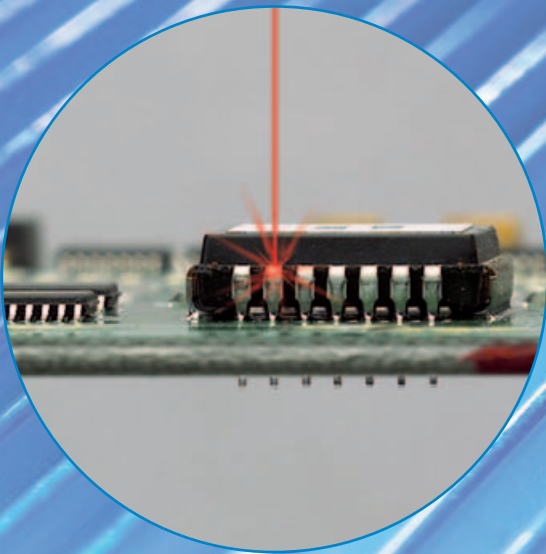


Finely structured or very small elements are measured with a thin light beam.

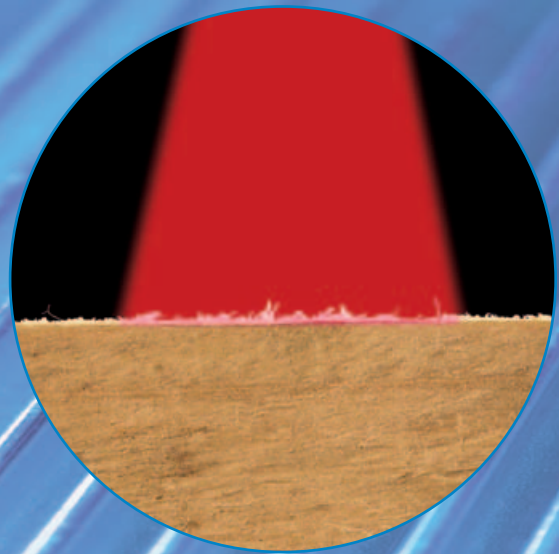

Rough, grooved surfaces are measured with wide light beam. The influence of surface structures is reduced.




An evaluation unit with application-oriented measurement algorithms and a large selection of sensor heads, which can also be operated without the evaluation unit, are available.

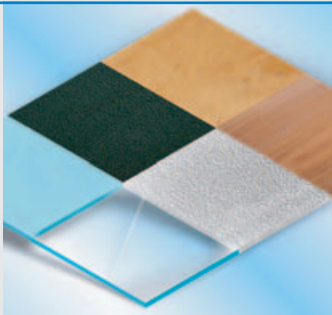

Multifaceted

Regardless of whether light or dark, rough or structured, transparent or opaque: optimum reliability with very different materials.

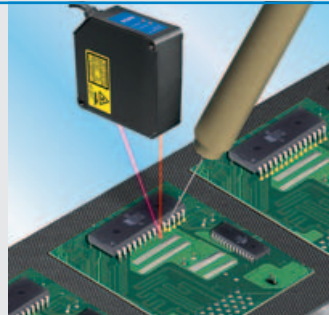


Optimum precision

Achieve optimum precision with very easy operation and application-oriented functions at the same time.



Stand alone via RS 422 to the PLC

The sensor heads can be connected directly to the PLC via the RS 422 interface: easy integration into the system, with or without evaluation unit.

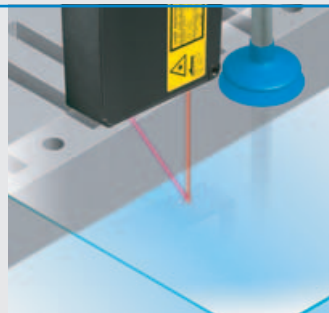

Glass thickness measurement with only one sensor head


Thickness measurements of transparent objects are very easy now. Only one sensor head is required with the new evaluation algorithm for glass thickness measurement.

Displacement sensor OD Precision, sensor head


	Measurement ranges
	25 ± 1 / 30 ± 5 / 85 ± 20 / 350 ± 100 / 500 ± 200 mm
Displacement sensor	

- Optimum reliability thanks to improved measurement algorithm and different light spot geometries
- Highest accuracy
- Numerous functions with simple operation
- Stand-alone integration of the sensor heads possible (via RS 422)

Dimensional drawing		
OD5-25T01	OD5-30T05	OD5-85T20
OD5-25W01	OD5-30W05	OD5-85W20

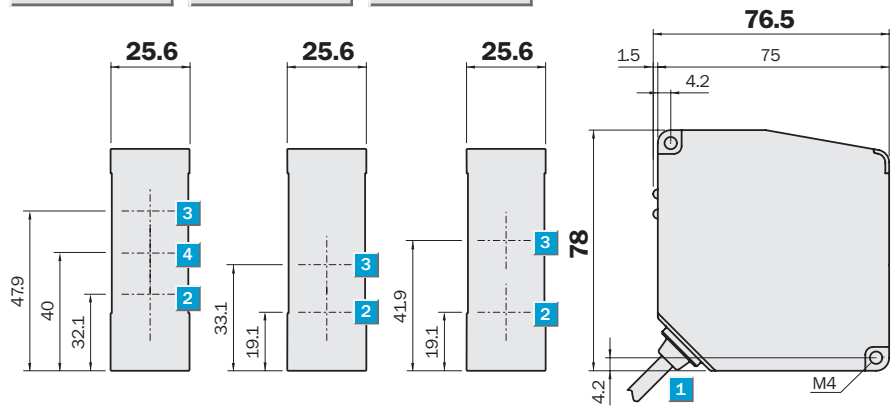

OD5-350W100	OD5-500W200
-------------	-------------


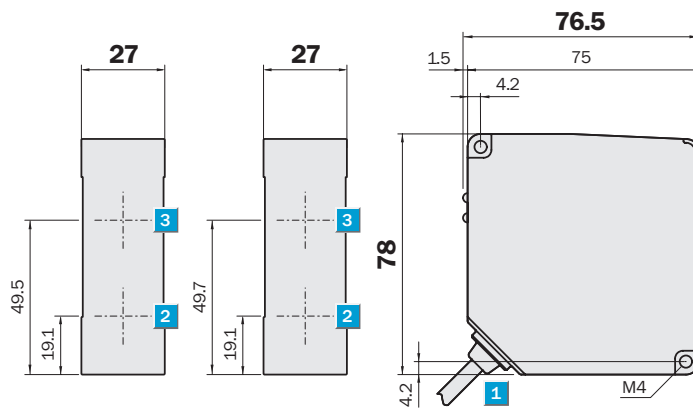


- | | |
|---|--|
| 1 Cable Ø 7.1 mm/0.5 m with 12-pin connector | 4 Optical axis – light spot (at 25 mm due to V-Optics with 17.5°) |
| 2 Optical axis – sender | 5 Distance indicator LED |
| 3 Optical axis – receiver | 6 Laser on LED |

Accessories
Cables and connectors

Adjustments possible
All types

Connection types	
All types	12-pin







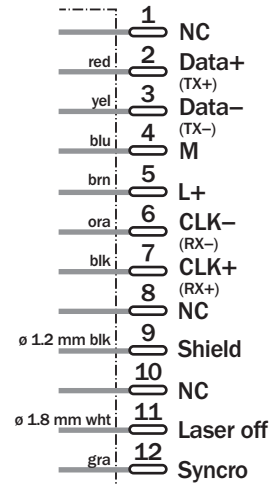
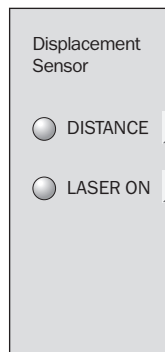


Technical data		OD5-		25 T01	25 W01	30 T05	30 W05	85 T20	85 W20	350 W100	500 W200		
Light source	Red laser class 1 (II) ¹⁾												
	Red laser class 2 (II) ²⁾												
Measuring range	25 ± 1 mm												
	30 ± 5 mm												
	85 ± 20 mm												
	350 ± 100 mm												
	500 ± 200 mm												
Resolution ³⁾	0.02 µm												
	0.2 µm												
	1 µm												
	5 µm												
	10 µm												
Reproducibility ⁴⁾	0.06 µm												
	0.6 µm												
	3 µm												
	15 µm												
	30 µm												
Linearity	± 1.6 µm ⁵⁾												
	± 10 µm ⁶⁾												
	± 8 µm ⁶⁾												
	± 20 µm ⁶⁾												
	± 160 µm ⁶⁾												
Temperature drift	± 0.01 % FS ⁷⁾ /°C												
	Measuring frequency	10 kHz											
	1.25 kHz												
Data interfaces	RS 422 ⁸⁾												
Supply voltage V_s	12 ... 24 V DC (-5/+10 %)												
Enclosure rating	IP 67												
VDE protection class	⊖												
Ambient temperature	Operation -10 °C ... +50 °C ⁹⁾												
	Storage -20 °C ... +60 °C												
Vibration resistance	10/s ... 55/s ¹⁰⁾												
Shock resistance	50 G (500 m/s ²)												
Material	Housing/Front	Aluminium/Glass											
Connection type		0.5 m pigtail with plug ¹¹⁾											

- ¹⁾ Wavelength 650 nm, max. output 390 µW
- ²⁾ Wavelength 650 nm, max. output 1 mW
- ³⁾ Averaging: 4,096 measurement values:
90% remission/mirror (OD5-25);
Distance: middle distance
- ⁴⁾ Averaging: 4,096 measurement values:
90% remission/mirror (OD5-25) and
constant environmental conditions
- ⁵⁾ On mirror: Parallel alignment of the active
sensor surface to the object surface
- ⁶⁾ For 90% remission (white ceramics)

- ⁷⁾ Full Scale:
OD5-25T01 = 2 mm
OD5-30T05 = 10 mm
OD5-85T20 = 40 mm
OD5-350W100 = 200 mm
OD5-500W200 = 400 mm
- ⁸⁾ (Full duplex) when used without evaluation
unit
- ⁹⁾ Non-condensing
- ¹⁰⁾ Double amplitude 1.5 mm, 2 h for xyz axes
- ¹¹⁾ Extendable by cable to max. 50 m


Order information			
Type	Order no.	Type	Order no.
OD5-25T01	6035975	OD5-85T20	6035979
OD5-25W01	6035976	OD5-85W20	6035980
OD5-30T05	6035977	OD5-350W100	6035981
OD5-30W05	6035978	OD5-500W200	6035982

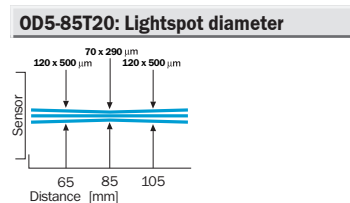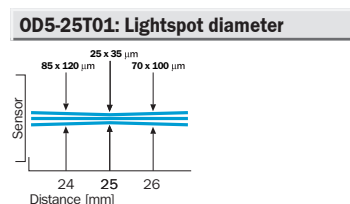

	Measurement ranges
	25 ± 1 / 30 ± 5 / 85 ± 20 /
	350 ± 100 / 500 ± 200 mm
Displacement sensor	


- Optimum reliability thanks to improved measurement algorithm and different light spot geometries
- Highest accuracy
- Numerous functions with simple operation
- Stand-alone integration of the sensor heads possible (via RS 422)

Dimensional drawing

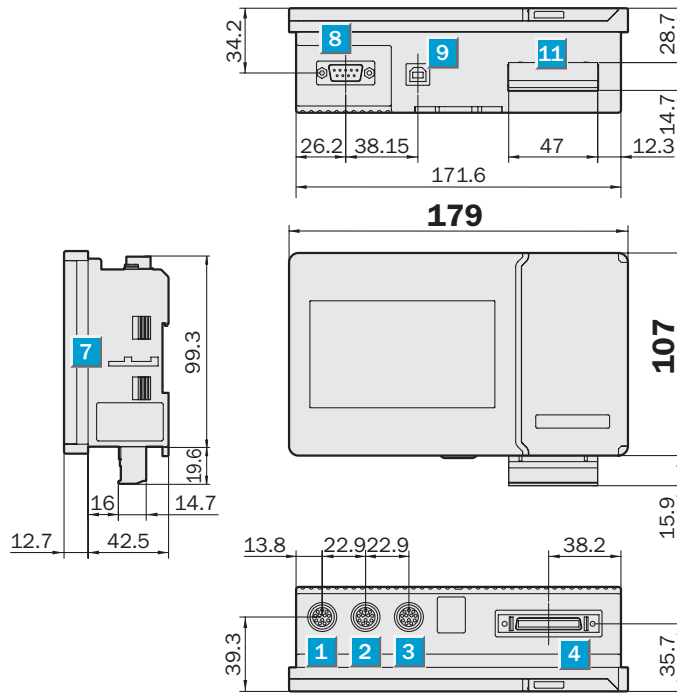

Adjustments possible

All types

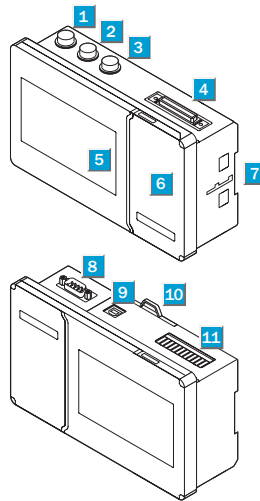


- 1** Sensor head A connection port
- 2** Sensor head B connection port
- 3** Sensor head C connection port
- 4** Terminal board 50-pin extern (see accessories)
- 5** LCD display
- 6** Operation panel
- 7** For panel mounting bracket (recommended window size 173 x 102 mm)
- 8** RS 232C interface
- 9** USB interface
- 10** Fastening handle DIN Rail
- 11** Terminal board (detachable)

Connection terminal board

All types

P1 [V]	—	Port 1 voltage output
GND	—	GND
P2 [V]	—	Port 2 voltage output
GND	—	GND
P3 [V]	—	Port 3 voltage output
P1 [mA]	—	Port 1 current output
GND	—	GND
P2 [mA]	—	Port 2 current output
GND	—	GND
P3 [mA]	—	Port 3 current output
0V	—	0 V input (common GND)
24 V	—	24 V input

Connector pinning RS 232C



Male connector, 9-pin

- 1 () DCD – Data Carrier Detect
- 2 () RXD – Receive Data
- 3 () TXD – Transmit Data
- 4 () DTR – Data Terminal Ready
- 5 () SG – Signal Ground
- 6 () DSR – Data Set Ready
- 7 () RTS – Request to Send
- 8 () CTS – Clear to Send
- 9 () RI – (Ring Indicator)

Accessories

Cables and connectors



Technical data		AOD5-	P1	N1								
Response time ¹⁾	0.1 ms/0.8 ms											
Output rate ¹⁾	10 kHz/1.25 kHz											
In- and outputs	PNP											
	NPN											
Outputs												
3 Analogue voltage outputs	-10 ... + 10 V ²⁾											
3 Analogue current outputs	4 ... 20 mA ³⁾											
5 Switching outputs ⁴⁾	Max. 100 mA/24 V DC ⁵⁾											
3 Alarm outputs ⁴⁾	To indicate failed measurements											
Data interface	RS 232											
	USB											
Inputs												
4 Bank inputs ⁴⁾	External memory bank selection											
5 Hold inputs ⁴⁾	Holding the measurement											
3 Laser OFF inputs ⁴⁾	Laser off											
4 Zero reset inputs ⁴⁾	To reference the measurement											
Display type	LCD colour display											
Additional features	Arithmetic calculations											
	Averaging functions											
	Frequency filters											
	Autom./manual sensitivity setting											
	Timer functions											
	16 Memory banks											
	Hold functions											
	Anti interference mode ⁶⁾											
	Glass thickness measurement ⁷⁾											
	Supply voltage V_s	12 ... 24 V DC ± 10 %										
Power consumption ⁸⁾	450 mA/24 V											
Enclosure rating	IP 20											
VDE protection class	⊠											
Ambient temperature	Operation -10 °C ... +45 °C ⁹⁾											
	Storage -20 °C ... +60 °C											
Vibration resistance	10/s ... 55/s ¹⁰⁾											
Shock resistance	20 G (196 m/s ²)											
Weight	Approx. 550 g (incl. terminals)											
Material	Housing	Polycarbonate										
	Terminal board	Nylon 66										
Connection type	Terminal board											

¹⁾ Depending on connected sensor head without averaging and with manual sensitivity setting

²⁾ Output impedance 100 Ω

³⁾ Load impedance max. 300 Ω

⁴⁾ With use of external 50-pin terminal (accessories)

⁵⁾ Residual voltage max. 1.8 V

⁶⁾ For sensor heads A and B

⁷⁾ With V alignment, e.g., OD5-25 ...

⁸⁾ When connected with 3 sensor heads. Including analogue current output.

⁹⁾ Non-condensing

¹⁰⁾ Double amplitude 1.5 mm, 2 h for xyz axes

Order information

OD5 Amplifier unit

Type	Order no.
AOD5-N1	6035984
AOD5-P1	6035985

Accessories, extension cable

Type	Order no.	Cable length
DSL-1212-G02M	6035986	2 m
DSL-1212-G05M	6035987	5 m
DOL-1212-G05M	6035988	5 m
TERM-AOD5	6035989	Spare part
IO-EXP-AOD5	6035990	

Australia

Phone +61 3 9497 4100
1800 33 48 02 - tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail sac@sick.com.br

Ceská Republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +852-2763 6966
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-250
E-Mail info@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-999-0590
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 3358 1341
E-Mail support@sick.jp

Nederlands

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail austefjord@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

Republic of Korea

Phone +82-2 786 6321/4
E-Mail kang@sickkorea.net

Republika Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7 495 775 05 34
E-Mail info@sick-automation.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail admin@sicksgp.com.sg

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886 2 2365-6292
E-Mail sickgrc@ms6.hinet.net

Türkiye

Phone +90 216 587 74 00
E-Mail info@sick.com.tr

USA/Canada/México

Phone +1(952) 941-6780
1 800-325-7425 - tollfree
E-Mail info@sickusa.com

More representatives and agencies
in all major industrial nations at
www.sick.com