

Model

CQM1-AD042

Analog input unit

INSTRUCTION SHEET

Thank you for purchasing an OMRON product. Read this thoroughly and familiarize yourself with the functions and characteristics of the product before using it. Keep this instruction sheet for future reference.



© OMRON Manufacturing of The Netherlands B.V. 1999
All rights reserved.

1614888-6B

Caution

- All DIP switches should be set before mounting the Analog Input Unit to the CQM1.
- Setting all DIP switches to OFF results in an error because all input conversion is prohibited.
- Normally the unit occupies 4 words. When switches 5...8 are OFF, the unit occupies 2 words.
- Do not touch any internal components other than the DIP switches.

■ DIP Switch Settings


The following table provides DIP switch settings for selection of the analog input range :

Input setting				Input range
Input 1	Input 2	Input 3	Input 4	
sw. 1: ON sw. 2: ON	sw. 3: ON sw. 4: ON	sw. 5: ON sw. 6: ON	sw. 7: ON sw. 8: ON	-10 to 10 V
sw. 1: OFF sw. 2: ON	sw. 3: OFF sw. 4: ON	sw. 5: OFF sw. 6: ON	sw. 7: OFF sw. 8: ON	0 to 10 V
sw. 1: ON sw. 2: OFF	sw. 3: ON sw. 4: OFF	sw. 5: ON sw. 6: OFF	sw. 7: ON sw. 8: OFF	0 to 5 V 0 to 20 mA
sw. 1: OFF sw. 2: OFF	sw. 3: OFF sw. 4: OFF	sw. 5: OFF sw. 6: OFF	sw. 7: OFF sw. 8: OFF	Conversion prohibited


■ Analog Input Connections

Connect a two-conductor twisted pair shielded cable to the Analog Input Unit as shown in the following illustrations.

Voltage Input



Current Input



Short-circuit the V+ and the I+ terminals for current input.

■ Indicators

Name	Color	Function
RDY	Green	Lit when unit is operating normally.
2CH/ 4CH	Orange	Lit when four words are occupied. Not lit when two words are occupied.
ERR	Red	Lit when dipswitches 1..8 are all off or when an internal error has occurred.

■ Terminals

The following table lists the usage of the terminals.

Terminal	Name	Function
B0	V1+	CH1 positive voltage input
A0	V1-	CH1 negative voltage / current input
B1	I1+	CH1 positive current input
A1	nc	
B2	V2+	CH2 positive voltage input
A2	V2-	CH2 negative voltage / current input
B3	I2+	CH2 positive current input
A3	nc	
B4	V3+	CH3 positive voltage input
A4	V3-	CH3 negative voltage / current input
B5	I3+	CH3 positive current input
A5	reserved	
B6	V4+	CH4 positive voltage input
A6	V4-	CH4 negative voltage / current input
B7	I4+	CH4 positive current input
A7	reserved	
B8	FG	Connect to shielding of the input cable
A8	FG	Connect to shielding of the input cable

■ IR bit allocation

- Input range : -10 V to +10 V. (Data is presented in 2's complement)

15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
Sign					d10	d9	d8	d7	d6	d5	d4	d3	d2	d1	d0

- Input range : 0 to 10 V / 0 to 5 V / 0 to 20 mA.

(Data is presented in straight binary)


15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0
0	0	0	0	d11	d10	d9	d8	d7	d6	d5	d4	d3	d2	d1	d0

The error value 2000_h is written to the PLC when an internal error occurs and can only be removed by turning off the power of the PLC.

■ Specifications

Number of inputs	4	
Input ranges	-10 V to +10 V 0 V to 10 V 0 V to 5 V 0 mA to 20 mA	
Resolution	12 bits	
Accuracy	25 °C 0 to 55 °C	0.5 % 1.0 %
Conversion speed	1.2 ms / channel	
Insulation	500 V AC between output and PLC bus	
Current consumption	170 mA at 5 V DC	
Input type	differential	
Input impedance	voltage 1 MΩ	current 250 Ω
Power supply	internal DC/DC converter	

■ Graph input vs. output

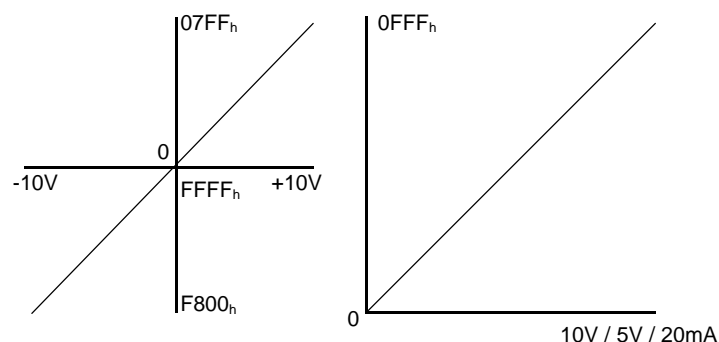

Note : Specifications subject to change without notice.