Retro-reflective sensors (Polarization filter), rectangular, plastic

FPDK 07N6901

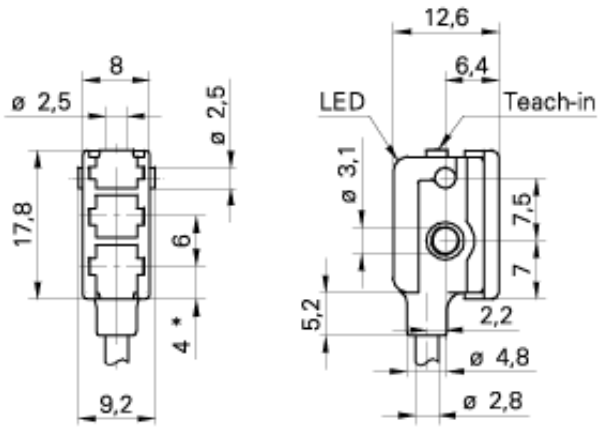

* emitter axis

Technical Data	
polarization filter	yes
function	retro-reflective sensor (rrs)
emitter / receiver	-
output	NPN
output state	light/dark operate
housing style	rectangular
width /diameter	8 mm
height	17,8 mm
depth	12,6 mm
housing material	plastic (PMMA, MABS, PA)
connection	cable bottom side
nominal range Sn	0 - 0,6 m
actual range Sb	0 - 0,5 m
beam focal point	-
repeatability	-
output indicator	LED green
alignment aid / soiled lens indicator	flashing LED
wave length	660 nm
light source	pulsed red diode
laser class (norm)	-
voltage supply range +Vs	10 - 30 VDC
supply current average/peak value	20 / 25 mA
switching current	< 100 mA
voltage drop	< 1,8 VDC
response time / release time	< 0,5 ms
automatic adjustment time	-
min. pulse length teach signal	-
sensitivity adjustable	teach-in
short circuit protection	yes
reverse polarity protection	yes
temperature range	-20 ... +50 °C
protection class	IP 65
connectors	none

photo

connection diagram

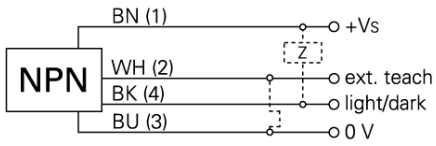

sensitivity adjustable: via Teach-in or Teach-in wire input