



Short metal arm lighting system made up of aluminum illuminator covered by anti-heat ABS case with unipolar switch on/off, n.3/6 power LED sources with 8°-25°-40° lens, aluminum swivel adjustment and fixing, Chromium plated stainless steel short metal arm. LED driver to be ordered separately.



**Applications:** particularly suitable for the lightning of sewing machines.

## TECHNICAL FEATURES

### ELECTRICAL FEATURES

Voltage  
Power  
Current  
IEC class

### MECHANICAL AND OPTICAL FEATURES

LED type  
LED lifetime  
Brightness  
Light colour  
Spotlight size  
Arm  
Fastening  
Switch  
Degree of protection  
Colour

### 3 LED

11,4 Vdc  
3 W  
350 mA  
I

### 6 LED

22,8 Vdc  
6 W  
350 mA  
I

Cree XR-E  
50000 h  
Wide beam  
5300 K  
Ø70x80mm  
Ø12xL280mm  
Aluminum swivel adjustment with M8 screw  
Unipolar on/off on the spot  
IP20  
Black - RAL9002

Cree XR-E  
50000 h  
Wide beam  
5300 K  
Ø70x80mm  
Ø12xL280mm  
Aluminum swivel adjustment with M8 screw  
Unipolar on/off on the spot  
IP20  
Black - RAL9002

### LAMP ORDER CODES

Cod.	N.LED	Lens	Lamp colour
L1050RLED.3.08	3	8°	Black
L1050RLED.3.25	3	25°	Black
L1050RLED.3.40	3	40°	Black
L1050RLED.6.08	6	8°	Black
L1050RLED.6.25	6	25°	Black
L1050RLED.6.40	6	40°	Black
L1050RLED.3.08.B	3	8°	RAL9002
L1050RLED.3.25.B	3	25°	RAL9002
L1050RLED.3.40.B	3	40°	RAL9002
L1050RLED.6.08.B	6	8°	RAL9002
L1050RLED.6.25.B	6	25°	RAL9002
L1050RLED.6.40.B	6	40°	RAL9002


### LED DRIVER ORDER CODES

Cod.	Vin	Iout dc	N.LED
A13350TC	230 Vac	350 mA	3
A13350TC1 12-24	12-24 V	350 mA	3
A16350TC	230 Vac	350 mA	6
A16350TC1 12-24	24 V	350 mA	6

### Flow light from working surface

#### H 220mm - 40° lens - 3 LED

Current	350mA
Ø (mm)	lux
60	10800
120	3400
180	1000

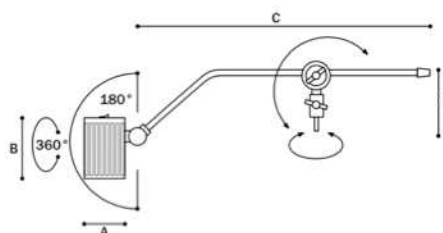

#### Dimensions

A -	Ø70mm
B -	80mm
C -	340mm
D -	70mm