

OBSOLETE

LS2200

Ultra Compact Laser Scanner

Features

- Scanning speed up to **2,000 scans/sec**
- Very High density code reading (up to 0.076 mm, 3 mils)
- Ultra compact dimensions 50x40x28 mm (1.97x1.57x1.10 in)
- Lightweight 150 g (5.29 oz)
- 4 status LEDs
- IP65 rugged industrial housing

Applications

- High speed
 - Document handling machines
 - Packaging machines
 - Printing verification

General Description

OEMs have been searching for a device able to solve the fastest applications on the market.

Datalogic's **LS2200** overcomes today's speed limits by performing up to **2,000 scans/sec**, more than twice as the average of actual scanners.

In addition to this amazing feature, **LS2200** integration into automated equipment is very easy thanks to its miniature dimensions and light weight.

The **LS2200** can adapt its gain and digitizer parameters, thus improving scanning performance on very high density codes (up to 0.076 mm, 3 mils). It is also possible to select a different speed to scan damaged or poorly printed barcodes, getting better reading results.

High reliability, cost effectiveness, great scanning performance, along with industrial quality standards are additional winning points for OEM manufacturers who choose the **LS2200** to improve their machine performance.

The **LS2200** can be connected to all Datalogic industrial decoders.


Models and Accessories

MODEL	DESCRIPTION	ORDER NO.
LS2200-1000	Standard resolution, linear	930111000
LS2200-1010	Standard resolution, raster R1	930111010
LS2200-2000	High resolution, linear	930111020
LS2200-2010	High resolution, raster R1	930111030



Specifications

POWER SUPPLY	10 ± 30 VDC
POWER CONSUMPTION	2 W
LIGHT SOURCE	Visible laser diode (650 nm)
MAX. RESOLUTION	1xxx models 0.15 mm (6 mils) 2xxx models 0.10 mm (4 mils) (up to 0.076 mm, 3 mils)
MAX. READING DISTANCE	1xxx models 230 mm (9.1 in) on 0.60 mm (24 mils) code resol. 2xxx models 115 mm (4.5 in) on 0.30 mm (12 mils) code resol.
MAX. DEPTH OF FIELD	1xxx models 180 mm (7.1 in) on 0.60 mm (24 mils) code resol. 2xxx models 85 mm (3.7 in) on 0.30 mm (12 mils) code resol.
APERTURE ANGLE	60 degrees (8 mirrors rotor)
RASTER APERTURE	15 mm (0.6 in) at 230 mm (9.1 in) for XX1X models
SCANNING SPEED	1,000 scans/sec standard (Up to 2,000 scans/sec)
INPUT SIGNALS	Scanning speed selection (Half/Full) digital input Code Density Optimization (High/standard) digital input Scanner Power (On/Off) digital input
LED INDICATORS	'Hi-Res', 'Laser On', 'Good Read', 'Power On'
LASER CLASSIFICATION	IEC 825-1 Class 2; CDRH Class II
LASER CONTROL	Security system to turn laser off in case of motor slow down or failure
DIMENSIONS	50 x 40 x 28 mm (1.97 x 1.57 x 1.10 in)
WEIGHT (without cable)	150 g (5.29 oz)
CASE MATERIAL	Die-cast zinc
OPERATING TEMPERATURE	0 to 40 °C (32 to 104 °F)
STORAGE TEMPERATURE	-20 to 70 °C (-4 to 158 °F)
HUMIDITY	90% non condensing
VIBRATION RESISTANCE	IEC 68-2-6 test FC 1.5 mm; 10 to 55 Hz; 2 hours on each axis
SHOCK RESISTANCE	IEC 68-2-27 test EA 30 G; 11 ms; 3 shocks on each axis
PROTECTION CLASS	IP65

Dimensions

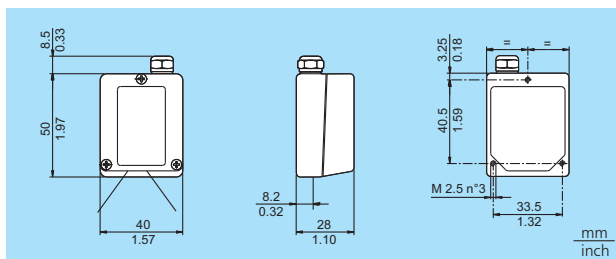

Reading Diagrams

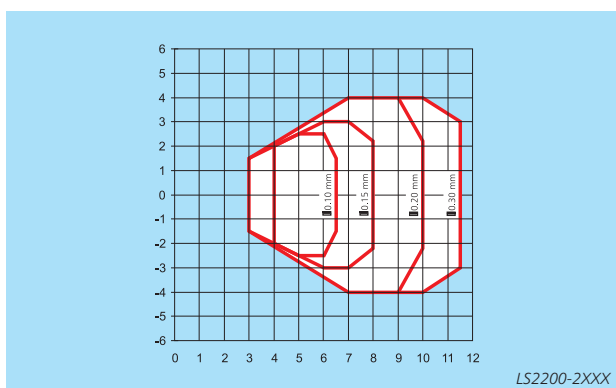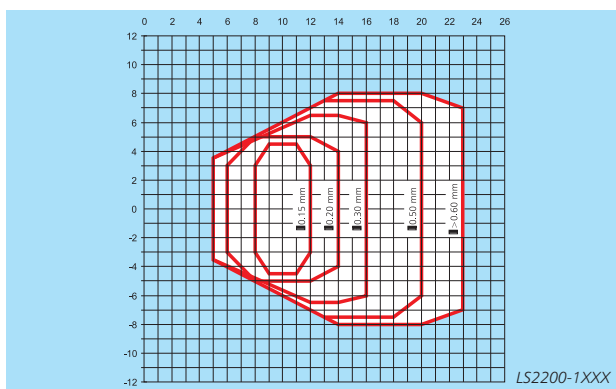

DATALOGIC DL

Bar Code & More

Product and company names and logos referenced may be either trademarks or registered trademarks of their respective companies.

Australia
Datalogic PTY LTD.
Tel. +61 3/95589299
Fax +61 3/95589233
sales@datalogic.com.au

Austria
Datalogic Handelsges MBH
Tel. +43 2236/258820
Fax +43 2236/258825
office@datalogic.co.at

Denmark
Datalogic AB
Tel. +45 44/209970
Fax +45 44/209972
info@datalogic.se

France
Datalogic France S.A.
Tel. +33 1/60921111
Fax +33 1/60921340
dlfrance@worldnet.fr

Germany
Datalogic GmbH
Tel. +49 7026/6080
Fax +49 7026/5746
info@datalogic.de

Italy
Datalogic S.p.A.
Tel. +39 051/6459211
Fax +39 051/726562
info@datalogic.it

Japan
Izumi Datalogic Co., Ltd.
Tel. +81 78/2723400
Fax +81 78/2722003
idmarke@izumi-datalogic.co.jp

Netherlands
Datalogic Optic Electronics BV
Tel. +31 346/572888
Fax +31 346/568736
info@datalogic.nl

Spain
Datalogic France S.A.
Tel. +34 93/3221227
Fax +34 93/4394136
datalogic@sei.es

Sweden
Datalogic AB
Tel. +46 40/385000
Fax +46 40/385001
info@datalogic.se

United Kingdom
Datalogic UK Ltd.
Tel. +44 1582/464900
Fax +44 1582/464999
enquiries@datalogic.demon.co.uk

U.S.A.
Datalogic Inc.
Tel. +1 606/6897000
Fax +1 606/3344970
info@datalogic.com



We reserve the right to make modifications and improvements

Datalogic Quality Partner



These products are available through the worldwide network of Datalogic Quality Partners.

