

OBSOLETE

LS6100

PRODUCT DESCRIPTION

LS6100

High Performance Compact Laser Scanner

Features

- High frequency laser diode modulation system
- Advanced electronic digitizer
- Adjustable focus system
- Reading distance up to 1800 mm
- Depth of field up to 1600 mm
- Scanning speed up to 1000 scans/sec.
- Compact industrial housing 101 x 83.5 x 66.5 mm
- IP65 protection class

Applications

- High speed conveyors
- Parcel sorting
- Automated warehouses
- Automatic picking systems
- Work-in-progress tracking and monitoring

General Description

The laser diode scanner **LS6100** is an industrial bar code reader which implements the most advanced technology and offers excellent performance.

The high frequency laser diode modulation system guarantees high immunity to ambient light and allows installation of the **LS6100** in any working conditions.

The scanner has been designed to meet the requirements of applications concerning automatic identification of objects on high speed conveyors, and to create very high reading performance systems for package sorting.

Thanks to the use of the advanced electronic digitizer, the **LS6100** tailors its characteristics to the application to be implemented and to the code to be read, thus offering high performance in any reading conditions.

The adjustable focus system makes the reading field choice very flexible and permits the **LS6100**'s characteristics to adapt perfectly to the application's needs.

Excellent reading performance is assured by a max. scanning speed of 1000 scans/sec. and a max. reading distance of 1800 mm (71.0 in.) with a max. depth of field of 1600 mm (63.0 in.).

The **LS6100** is enclosed in an industrial case with very compact dimensions. Due to its reduced size, the reader can be installed on any kind of conveyor without difficulty.

The **LS6100** can be connected to all Datalogic industrial decoders.


Models and Accessories

MODEL	VERSION				USA VERSION	ORDER NUMBER
	Linear	Raster R1	Raster R2	Raster R3		
LS6100-1000	•					910871000
LS6100-1001	•				•	910871010
LS6100-1010		•				910871020
LS6100-1011		•			•	910871030
LS6100-1020			•			910871040
LS6100-1021			•		•	910871050
LS6100-1030				•		910871060
LS6100-1031				•	•	910871070
ACCESSORIES						
GFC-50	90° reading device					B9751067
GFC-05	Oscillating mirror attachment					B9751098



Specifications

POWER SUPPLY	10 to 30 Vdc
POWER CONSUMPTION	5.5 W
LIGHT SOURCE	Visible laser diode (670 nm)
MAX. RESOLUTION	0.20 mm (8 mils)
SCAN RATE	800 (1000) scans/sec
MAX. READING DISTANCE	1800 mm (71.0 in)
MAX. DEPTH OF FIELD	1600 mm (63.0 in)
APERTURE ANGLE	55 degrees
LED INDICATORS	'Power On', 'Laser On', 'Good Read'
LASER CLASSIFICATION	IEC 825 Class 2
LASER CONTROL	Security system to turn laser Off in case of motor slow down or failure
DIMENSIONS	101 x 83.5 x 66.5 mm (4.0 x 3.3 x 2.6 in)
WEIGHT	680 g (24 oz approx.)
CASE MATERIAL	Cast aluminium
OPERATING TEMP.	0 to 40 °C (32 to 104 °F)
STORAGE TEMP.	-20 to 70 °C (-4 to 158 °F)
HUMIDITY	90% non condensing
VIBRATION RESISTANCE	IEC 68-2-6 test FC 1.5 mm; 10 to 55 Hz; 2 hours on each axis
SHOCK RESISTANCE	IEC 68-2-27 test EA 30 G; 11 ms; 3 shocks on each axis
PROTECTION CLASS	IP65

Dimensions

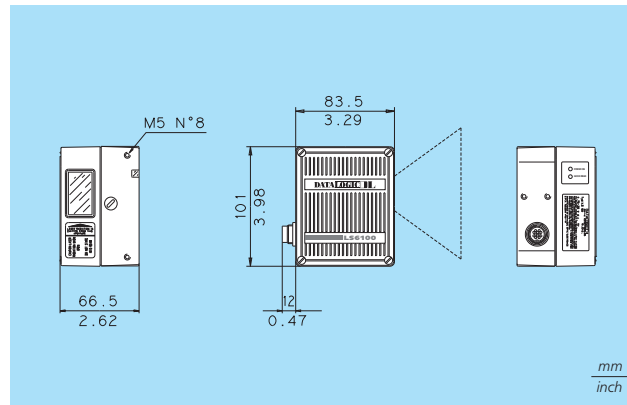

Reading Diagram

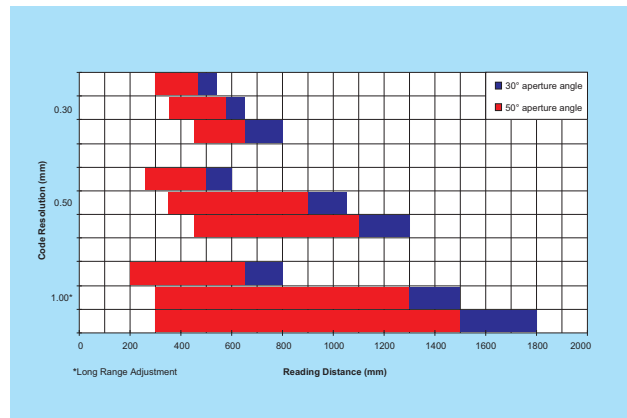

DATA LOGIC DL

Bar Code & More

We reserve the right to make modifications and improvements

Australia
Datalogic PTY. LTD.
Tel. +61 3/95589299
Fax +61 3/95589233
sales@datalogic.com.au

Austria
Datalogic Handelges. MBH
Tel. +43 2236/25882
Fax +43 2236/258825
datalogic@ins.at

Denmark
Datalogic AB
Tel. +45 44/209970
Fax +45 44/209972
info@datalogic.se

France
Datalogic France S.A.
Tel. +33 1/60921111
Fax +33 1/69072631
dfrance@worldnet.fr

Germany
Datalogic GmbH
Tel. +49 7026/6080
Fax +49 7026/5746
datalogic.gmbh@t-online.de

India
Datalogic (India) Private Ltd.
Tel. +91 80/5584440
Fax +91 80/5582896
datalogic@vsnl.com

Italy
Datalogic Trading S.r.l.
Tel. +39 02/2532542
Fax +39 02/2544007
datalogic.trd@iol.it

Japan
Izumi Datalogic Co., Ltd.
Tel. +81 78/2723400
Fax +81 78/2722003
idlmrke@izumi-datalogic.co.jp

Netherlands
Datalogic Optic Electronics BV
Tel. +31 346/572888
Fax +31 346/568736
info@datalogic.nl

Spain
Datalogic France S.A.
Tel. +34 93/3221227
Fax +34 93/4394136
datalogic@sei.es

Sweden
Datalogic AB
Tel. +46 40/385000
Fax +46 40/181849
info@datalogic.se

United Kingdom
Datalogic UK Ltd.
Tel. +44 1582/464900
Fax +44 1582/464999
enquiries@datalogic.demon.co.uk

U.S.A.
Datalogic Inc.
Tel. +1 606/6897000
Fax +1 606/3344970
info@datalogic.com



Datalogic Quality Partner



These products are available through the European network of Datalogic Quality Partners.

