

# **VS8000**

# Laser Detector

#### **FEATURES**

- Multi-purpose detection system
- 800 x 800 mm detection area
- Real time data computing
- Installation and setting as a bar code scanner
- Easy installation on any type of conveyor
- IP64 rugged industrial housing

## **APPLICATIONS**

- Parcel sorting
- Mail object sorting
- Loading/unloading systems
- Transport and layout optimization

#### **GENERAL DESCRIPTION**

The **V\$8000** laser scanner is based on some of the most innovative Datalogic patented technologies. Thanks to its flexible and open architecture, the **V\$8000** can be customized to perform various identification functions on objects transported on conveyors in an extremely cost effective way. These functions include object detection, footprint detection and object classification.

Object detection involves real time contrast analysis and object distance measurement allowing presence detection of objects transported on conveyors with heights from 0 to 800 mm. This automatic function can be exploited when standard systems cannot be utilized due to the conveyor shape or to the object thickness.

Footprint detection extends the concept of object sensing. The **V\$8000** provides information about the footprint area, the orientation and position of objects across the conveyor belt or tray. This information communicated to the sorter control system can be utilized during tray or belt operation to avoid possible sorting errors or parcel jams.

Object classification detects object profiles and estimates overall object size by scanning objects in movement. Estimated data can be used for layout and transport optimization systems as well as many other applications.

Thanks to the **V\$8000's** simple architecture, installing and operating the detection system is as easy as for a standard laser scanner allowing easy integration and providing great advantages to system integrators and end users.

The V\$8000 works on top of conveyors and covers a standard area of 800 x 800 mm. It can be easily integrated into omni-directional reading stations based on Datalogic's laser scanners.

With this device, Datalogic offers a reliable solution for specific identification needs and new process automation capabilities to materials handling operators.



### **MODELS AND ACCESSORIES**

MODEL	DESCRIPTION	ORDER NO.
VS8000-1010	Laser detector, RS232 interface	932701010
ACCESSORIES		
PWR-240	240W power unit 110/230 Vac 24 Vdc	93ACC1070
FBK-8100	Fast bracket kit (2 pcs)	93ACC1130
US-8100	Bracket kit (10 pcs)	93ACC1140

Please refer to local subsidiaries/distributors for cables, connectors and terminators

# **SPECIFICATIONS**

POWER SUPPLY 20 to 30 Vdc POWER CONSUMPTION 30 W

LIGHT SOURCE Visible Laser Diode (660 nm)

IR laser diode (780 nm) LIGHT RECEIVER Avalanche photodiode SCAN RATE 800 scans per second STANDARD COVERAGE AREA 800 X 800 mm

COMMUNICATION RS232 (RS422 optional) COMMUNICATION SPEED 1,200 to 38,400 bauds INPUT SIGNALS 'Presence sensor' 'Encoder (NPN/PNP transistor)

**OUTPUT SIGNALS** 3 programmable (NPN transistor open collector and

emitter)

SET UP Via RS232 serial port LED INDICATORS 6 LED status indicators LASER CLASSIFICATION IEC 825 Class 3A

LASER CONTROL Security system to turn laser Off in case of motor

slow down or failure

DIMENSIONS 215.5 x 170.5 x 126.5 mm (8.48 x 6.71 x 4.98 in)

WEIGHT 5.0 Kg (11 lbs) approx.

CASE MATERIAL Aluminum

OPERATING TEMPERATURE 0 to 45 °C (32 to 113 °F) STORAGE TEMPERATURE -20 to 70 °C (-4 to 158 °F) HUMIDITY 90% non condensing

VIBRATION RESISTANCE IEC 68-2-6 test FC 1.5 mm, 10 to 55 Hz; 2 hours on


each axis

SHOCK RESISTANCE IEC 68-2-27 test EA 30 G 11 ms; 3 shocks on each

axis

PROTECTION CLASS IP64 (IP65 optional)

# **DIMENSIONS**

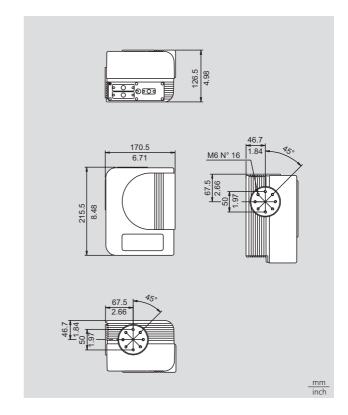





#### A UDIN Composants & systèmes d'automatisme

Siège :7 bis rue de Tinqueux - 51100 Reims - France - Tel : 03.26.04.20.21 - Fax : 03.26.04.28.20 Agence Nord: 66 rue J.Baptiste Lebas - 59910 Bondues - France Tel: 03.20.27.99.84 - Fax: 03.20.27.99.85

Web: http://www.audin.fr - Email: info@audin.fr





We reserve the right to make modifications and improvements

Product and company names and logos referenced may be either trademarks or registered trademarks of their respective companies

Australia Datalogic PTY LTD. Tel. +61 3/95589299 Fax +61 3/95589233 sales@datalogic.com.au

Datalogic GmbH Tel. +49 7026/6080 Fax +49 7026/5746 info@datalogic.de

Datalogic Handelges MBH Tel. +43 2236/258820 Fax +43 2236/258825 office@datalogic.co.at Italy Datalogic S.p.A. Tel. +39 051/3147300 Fax +39 051/726562

venditeitalia@datalogic.it

Sweden

Datalogic AB Tel. +45 44/209970 Fax +45 44/209972 info@datalogic.se

Denmark

**Japan** Izumi Datalogic Co., Ltd. Tel. +81 78/2723400 Fax +81 78/2722003 idlmarke@izumi-datalogic.co.jp **United Kingdom** 

Datalogic UK Ltd. Tel. +44 1582/464900 Fax +44 1582/464999 enquiries@datalogic.demon.co.uk

France Datalogic France S.A. Tel. +33 1/60921111 Fax +33 1/60921340

Netherlands Datalogic Optic Electronics BV Tel. +31 346/572888 Fax +31 346/568736

info@datalogic.nl

Datalogic Quality Partner

<sup>\*</sup>Contact your local Datalogic distributor or subsidiary for further information about VS8000 characteristics, capabilities, performances, and limit of application.