
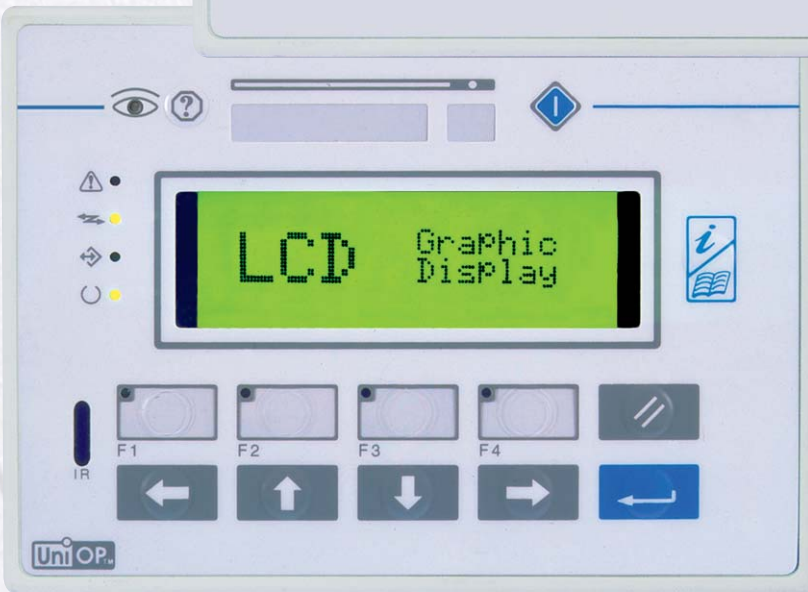
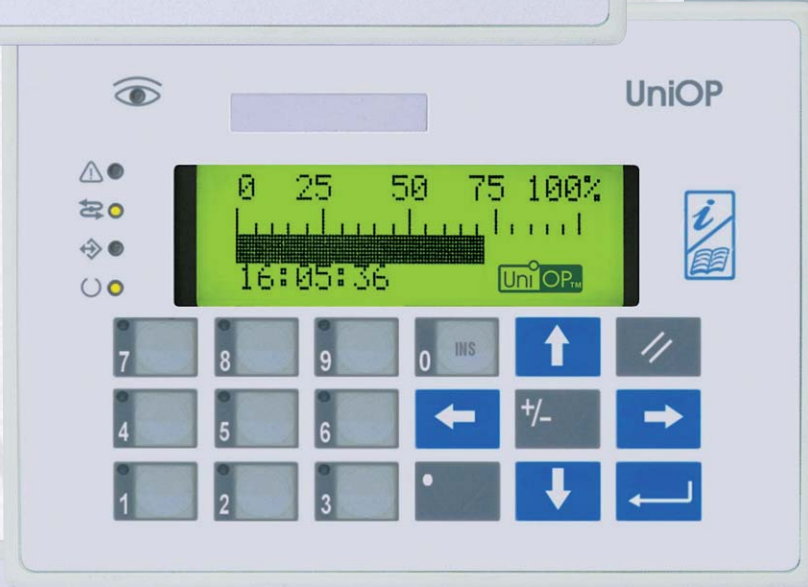


New

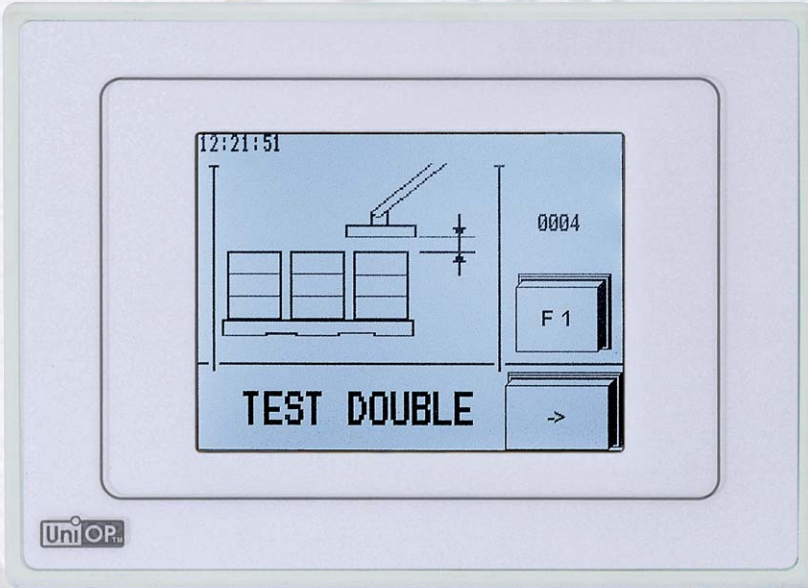


TOUCH THE TEXT

UniOP™

Technical Data

	eTOP03	ePAD03	ePAD04	ePAD05	ePAD06
Display	LCD Monochrome	LCD Monochrome	LCD Monochrome	LCD Monochrome	LCD Monochrome
Graphic Resolution	320x240	120x32	120x32	120x32	120x32
Rows/Columns of text	16x40	4x20	4x20	4x20	4x20
Scalable Fonts	Yes	Yes	Yes	Yes	Yes
User Dfinable characters	256	256	256	256	256
Memory					
User Memory	512 KB	512 KB	512 KB	512 KB	512 KB
Front Panel					
Function Keys	-	4	4	10	10
System Keys	-	7	7	9	9
Touchscreen	Analog Resistive	-	-	-	-
Connections					
PLC Port	Configurable	Configurable	Configurable	Configurable	Configurable
Aux Port (fieldbus and Ethernet)	Optional Module	Optional Module	Optional Module	Optional Module	Optional Module
Functionality					
Number of variables per page	Unlimited	Unlimited	Unlimited	Unlimited	Unlimited
Dual-Driver capability	Yes	Yes	No	Yes	No
Recipe Memory	32 KB	16 KB	-	16 KB	-
UniNET Network	Client/Server	Client/Server	Client	Client/Server	Client
Alarms	1024	1024	1024	1024	1024
Event List	256	256	-	256	-
Alarm Info Page	Yes	Yes	Yes	Yes	Yes
Passwords	Yes, 8 livels	Yes, 8 livels	Yes, 8 livels	Yes, 8 livels	Yes, 8 livels
Battery	Yes	Yes	-	Yes	-
Hardware RTC	Yes	Yes	-	Yes	-
Screen Saver	Yes	-	-	-	-
Power supply voltage	18÷30VDC	18÷30 VDC	18÷30 VDC	18÷30 VDC	18÷30 VDC
Pover consumption	400 mA at 24 VDC	250 mA at 24 VDC	250 mA at 24 VDC	250 mA at 24 VDC	250 mA at 24 VDC
Protection class front panel	IP 65	IP 65	IP 65	IP 65	IP 65
Dimensions (LxH) Cutout (AxB)	149x109 136x96				

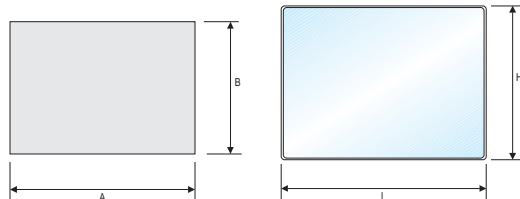

- COMPOSANTS D'AUTOMATISME
- SYSTEMES D'AUTOMATISME
- CONSTITUANTS ELECTROTECHNIQUES
- MESURE ET CONTROLE
- SECURITE MACHINE

8, Avenue de la Malle - ZI Les Coïdes
51370 SAINT BRICE COURCELLES
Tél. : 03.26.04.20.21 - Fax : 03.26.04.28.20
Email : info@audin.fr - Web : http://www.audin.fr

