


UniOP eTOP12

The eTOP12 are state-of-the-art HMI device with touchscreen interface and a brilliant 5.6" monochrome graphic display. The compact size and the 1/4 VGA resolution make them an attractive solution where space is a premium without compromising performance.

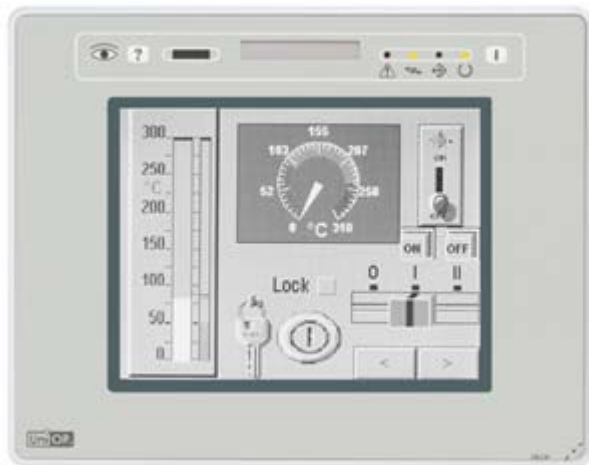

- 5.6" monochrome display
- 1/4 VGA (320x240 pixel) resolution
- Resistive touchscreen
- Connection to industrial bus systems and Ethernet (requires optional plug-in modules)
- 32 MB user memory
- Compatible with local I/O

Highlights

The eTOP HMI panels are part of the UniOP family of touchscreen products. All of the eTOP products support the rich common functionalities of the UniOP operator panels:

- Powerful and intuitive programming with the UniOP Designer 6 software
- Support of more than 130 communication drivers for industrial devices
- Optional modules for fieldbus systems (Profibus DP, CANopen, DeviceNet, Interbus) and Ethernet. Ethernet modules allow connection to field devices as well as programming the HMI from Designer.
- Dual-driver communication capability
- Display dynamic data in numerical, text, bargraph and graphic image formats
- Data acquisition and trend presentation. Trend data can be transferred to a host computer using the Ethernet connection.
- Analog gauge objects
- Recipe data storage. Recipe data can be transferred to a host computer using the Ethernet connection.
- Multilanguage applications. The number of runtime languages is limited only by the available memory. All text information in the application can be exported in Unicode format for easier translation.
- Powerful macro editor to configure touchscreen operation
- Alarms and historical alarm list. Alarm and event information can be printed or transferred to a host computer using the Ethernet connection.
- Eight level password protection.
- Report printing to serial printer. Reports are freely configurable using Designer.
- Ethernet-based UniNet network to share data between UniOP HMIs and to serve data using UniNet OPC Server.

Technical Data

Display			
Type	Monochrome	Recipe memory	32 KB
Resolution	1/4 VGA, 320x240 pixel	UniNet network	Client/Server
Active display area	121x91 mm (5.6" diagonal)	Alarms	1024
Colors	Monochrome	Event list	1024
Backlight	CCFL, 25K h ^(note 1)	Password	Yes
Brightness	200 cd/m ² typ.	Hardware RTC	Yes, battery backed
Dimming	No	Screen saver	Yes
Contrast regulation	Software	Buzzer	Yes, audible feedback for touch screen
Memory		Battery	3 V 270 mA Lithium, non rechargeable, user replaceable, model CR2430. Replace with same component or equivalent compatible with the operating temperature of the product.
User memory	32 MB Flash Card		
User memory expansion	-		
Front panel			
Touch screen	Analog resistive		
Function keys	1		
System keys	-		
User LED's	1		
System LED's	4		
Interfaces			
PC/Printer port	Yes		
PLC port	RS-232, RS-485, RS-422, 20 mA Current Loop		
Aux port (fieldbus and Ethernet)	Yes, with optional modules		
DX port (video input)	No		
Serial programming speed	9600 – 38400 bps		
Functionality			
Vector graphics	No		
Dual driver capability	Yes		
Video input	No		
Data acquisition and trends	Yes		
		Ratings	
		Power supply voltage	24 V DC (18 to 30 V DC)
		Current consumption	Max 0.6 A at 24 VDC
		Fuse	Automatic
		Weight	Approx 1.4 Kg
		Environmental Conditions	
		Operating temperature	0 to 45 °C
		Storage temperature	-20 to +70 °C
		Operating and storage humidity	5 – 85 % RH non-condensing
		Protection class	IP65 (front panel)
		Dimensions	
		Faceplate LxH	187x147 mm (7.36x5.79")
		Cutout AxB	176x136 mm (6.93x5.35")
		Mounting depth (type 0050)	91 mm (3.58")

Note 1: the lamp lifetime is the typical value for continuous operation at 25°C.

The product is designed for installation in industrial environments in compliance with the regulations:

Emitted interference EN 61000-6-4, 2001

Noise immunity EN 61000-6-2, 2001

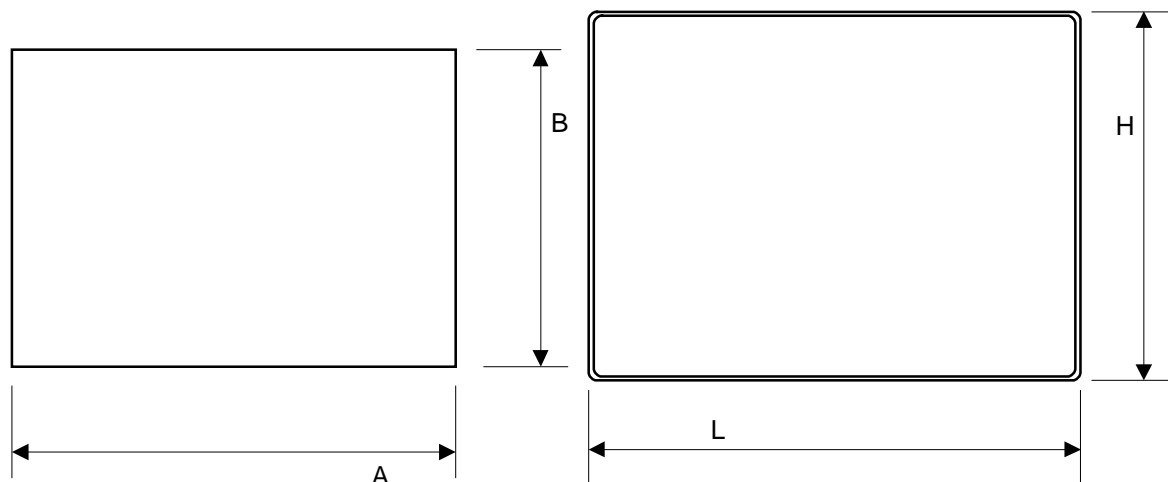


Figure 1 – Cutout and front view

Ordering Information

eTOP12-0050
PROT-03

5.6" 1/4 VGA Monochrome panel with touchscreen
Disposable protection foil for 5.6" eTOP touch panels (10 pieces)

Tn236

Ver. 1.00

Copyright © 2002, 2006 Sitek S.p.A. – Verona, Italy

Subject to change without notice

The information contained in this document is provided for informational purposes only. While efforts were made to verify the accuracy of the information contained in this documentation, it is provided "as is" without warranty of any kind.

www.exor-rd.com

tn236-0.doc - 10.03.2006
UniOP eTOP12