

OBSOLÈTE

UniOP eTOP33

The eTOP33 is a state-of-the-art HMI device with a touch screen interface and a 10.4" TFT color graphic display. The aluminum bezel offers a rugged and convenient flat design and an appealing look.

Highlights

- **10.4" TFT color display**
- **VGA (640x480 pixels) resolution**
- **Shows up to 30 rows, 80 characters of information**
- **Resistive touch screen**
- **Connection to industrial bus systems and Ethernet (requires optional plug-in modules)**
- **Compatible with HMIcontrol and local I/O subsystems**
- **Large memory size (8 MB Flash) on removable media**
- **IP65 front panel protection**



This eTOP HMI panels is part of the eTOUCH family of touch screen products. All of the eTOUCH products support the rich common functionality of the UniOP operator panels:

- Powerful and intuitive programming with the UniOP Designer 6 software
- Support of more than 130 communication drivers for industrial devices
- Optional modules for fieldbus systems (Profibus DP, DeviceNet, Interbus, CANopen) and Ethernet
- Dual-driver communication capability
- Vector graphic capabilities
- Display dynamic data in numerical, text, bargraph and graphic image formats
- Data acquisition and trend presentation
- Analog gauges
- Recipe data storage
- Multilanguage applications. Number of runtime languages limited only by memory.
- Powerful macro editor to configure touch screen operation
- Alarms and historical alarm list
- Eight level password protection
- Report printing to serial printer

Technical data

The product is available in one version.

	Display	Colors	Backlight	Lifetime
eTOP33	TFT color LCD	256	CCFL	25000 h

Display Graphic resolution Brightness Active display area Scalable fonts User definable characters Brightness regulation	640x480 pixels 200cd/m ² 218x159 mm (10.4" diagonal) Yes 256 -
Memory User memory User memory expansion	8 MB SSFDC memory card Memory cards up to 32 MB supported
Front panel Function keys System keys Touch screen User LED's System LED's	- - Analog resistive (guaranteed 3 M operations) - 5
Connections PC/Printer port PLC port Aux port (fieldbus and Ethernet connection) Programming speed	Yes RS-232, RS-485, RS-422, 20 mA CL Yes, with optional modules 9600 - 38400 bps
Functionality Number of variables per page Pixel and vector graphics Dual driver capability Recipe memory UniNet network Alarms Event list Password Battery Hardware RTC Screen saver Buzzer Power supply voltage Current consumption Fuse	Unlimited Yes Yes 32 KB Client/Server 1024 1024 Yes Yes Yes, battery backed Yes Yes, audible feedback for touch screen 18 - 30 VDC Max 700 mA at 24 VDC Automatic

Weight	Approx. 2.25 Kg
Operating temperature	0 to 45 °C
Storage temperature	-20 to +70 °C
Operating and storage humidity	5 - 85 % RH non-condensing
Protection class	IP65 (front panel)


The product is designed for installation in industrial environments in compliance with the regulations:

Emitted interference EN 50081-2, 1993


Noise immunity EN 61000-6-2

Front dimensions and cutout

Faceplate LxH	287x232 mm	11.30x9.14"
Cutout AxB	276x221 mm	10.87x8.70"
Cutout depth (version -0050)	91 mm	3.58"
Max panel thickness	5 mm	0.2"

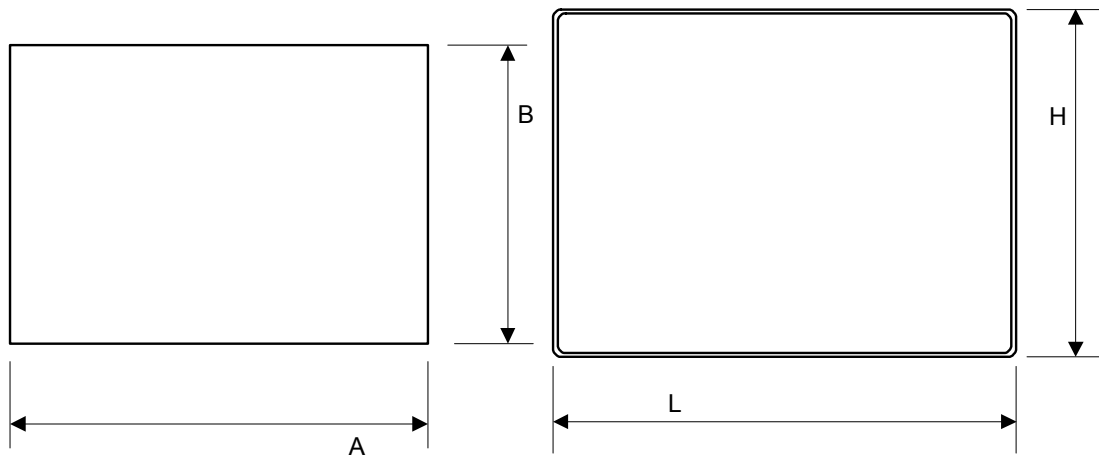


Connections

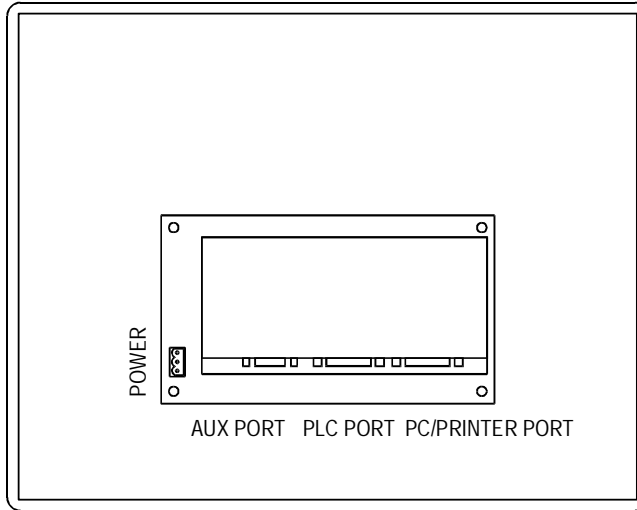

Indicators on the front panel

There are several dedicated LED indicators on the front panel of the unit. Functions are described in the table below.



A customizable legend strip is included.



Elements not listed in the table are reserved for future use.

LED	Color	Status	Meaning
	red	OFF	No hardware problem detected
		BLINK	Battery low
		ON	Hardware fault
	green	OFF	No touch cell active
		ON	While any touch cell is active (visual feedback)
	green	OFF	Hardware fault
		ON	Unit in operation
	green	BLINK	Communication error
		ON	Communication OK
	red	OFF	No alarms
		BLINK	Alarm requires acknowledgment
		ON	Alarm active
	green		May be user controlled as LED number 65 using the Macro Editor. Turns ON when recipe/event backup is being performed.

The service area at the top of the product includes also two buttons.

Button	Description
	User programmable with the Keyboard Macro Editor. Not available in RDA. Designer 5.08 SP7 or higher is required.
	Reserved for future use

Ordering Information

eTOP33-0050

10.4" VGA TFT color panel with touchscreen

Tn182

Copyright © 2002 Sitek S.p.A. Italy

Subject to change without notice

www.exor-rd.comAUDIN - 8, avenue de la malle - 51370 Saint Brice Courcelles
Tel : 03.26.04.20.21 - Fax : 03.26.04.28.20 - Web : <http://www.audin.fr> - Email : info@audin.fr