

UniOP eTOP607M

eTOP Series 600 HMI products combine state-of-the-art features and top performance with an outstanding design. They are the ideal choice for all demanding HMI applications including factory and building automation.

The glass projected capacitive touchscreen and the brilliant 7" widescreen display with resolution of 800x480 guarantee great optical performance and are up to the most demanding user interface requirements thanks to the high-speed CPU and the delivery configuration that includes 256MB Flash memory.

The JMobile software offers full vector graphic and plenty of connectivity options.



- 7" TFT color display, resolution 800x480 pixel, 64K colors
- LED backlight dimmable to 0%
- Projected capacitive touchscreen. True glass design
- 2 Ethernet ports with switch function
- 2 USB Host ports
- SD Card slot
- Plug-in modules for system expansion

Highlights


The eTOP Series 600 HMI panels have been designed to run the JMobile software.

- JMobile runtime included. Full compatibility with JMobile Studio.
- Full vector graphic support. Native support of SVG graphic objects. Transparency and alpha blending.
- Full object dynamics: control visibility and transparency, move, resize, rotate objects on screen. Change properties of basic and complex objects.
- TrueType fonts
- Multilanguage applications. Easily create and manage your applications in multiple languages to meet global requirements. Far East languages are supported. Tools available in JMobile Studio support easy third-party translations and help reducing development and maintenance costs of the application.
- Rich set of state-of-the-art HMI features: graphical presentation of data presentation, data acquisition, alarm handling, scheduler and timed actions (daily and weekly schedulers, exception dates), recipe data storage, users and passwords, e-mail and RSS feeds, rotating menus.
- Includes support for a wide selection of communication drivers for factory automation and building automation.
- Multiple drivers communication capability.
- Remote monitoring and control. Client-Server functionality. Mobile clients supported.
- Remote maintenance and support with VNC-based functionality.
- Off-line and on-line simulation of the HMI application with JMobile Studio.
- Powerful scripting language for automating HMI applications. Script debugging improves efficiency in application development.
- Create and print reports to printers and to file (PDF format).
- Page templates to simplify application design.
- Rich gallery of symbols and objects.
- PDF reader


Technical Data

Display		Battery	Rechargeable Lithium battery, not user-replaceable
Type	TFT	Environmental Conditions	
Resolution	800x480, WVGA	Operating temperature	-20° to +50 °C (vertical installation)
Active display area	7" diagonal	Storage temperature	-20 to +70 °C
Colors	64K	Operating and storage humidity	5 – 85 % relative humidity, non-condensing
Backlight	LED	Protection class	IP66 (front) IP20 (rear)
Brightness	300 Cd/m ² typ.	Dimensions	
Dimming	Dimmable to 0%	Faceplate LxH	187x147 mm (7.36x5.79")
System Resources		Cutout AxB	176x136 mm (6.93x5.35")
Operating System	Microsoft Windows CE 6.0	Depth D+T	47+8 mm (1.85+0.31")
User memory	256 MB Flash	Approvals	
RAM	256 MB DDR	CE	Emission EN 61000-6-4 Immunity EN 61000-6-2 for installation in industrial environments
Operator Interface		DNV Pending approval	DNV Type Approval Certificate
Touchscreen	Projected capacitive	ATEX Pending approval	Zone 2/22, II 3G / II 3D
LED indicators	-	UL Pending approval	UL508 Listed Haz. Loc. Class I, Division 2, Groups A,B,C and D.
Interface		C-Tick Pending approval	C-Tick mark
Ethernet	2 10/100 Mbit with integrated Switch		
USB	2 Host Interfaces (1x version 2.0, 1x version 2.0 and 1.1)		
Serial	RS-232, RS-485, RS-422, software configurable Max 2 serial ports with optional plug-in modules.		
Memory Card Expansion	SD Card slot 2 slots for optional plug-in modules		
Functionality			
Hardware Real Time Clock	Yes, with battery back-up		
Screen saver	Yes		
Buzzer	Yes, audible feedback for touchscreen		
Ratings			
Power supply voltage	24 Vdc (10 to 32 Vdc)		
Current consumption	0.6 A at 24Vdc(max.)		
Fuse	Automatic		
Weight	Approx 1.3 Kg		

Dimensions

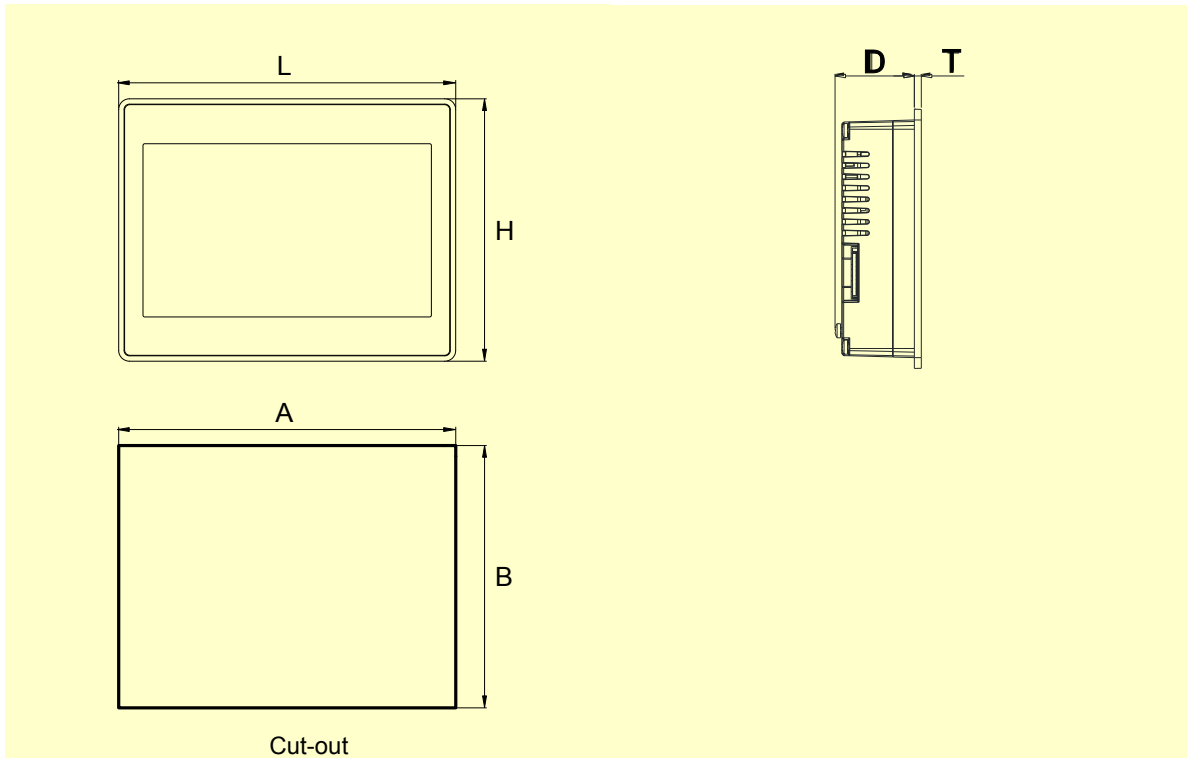

Connections

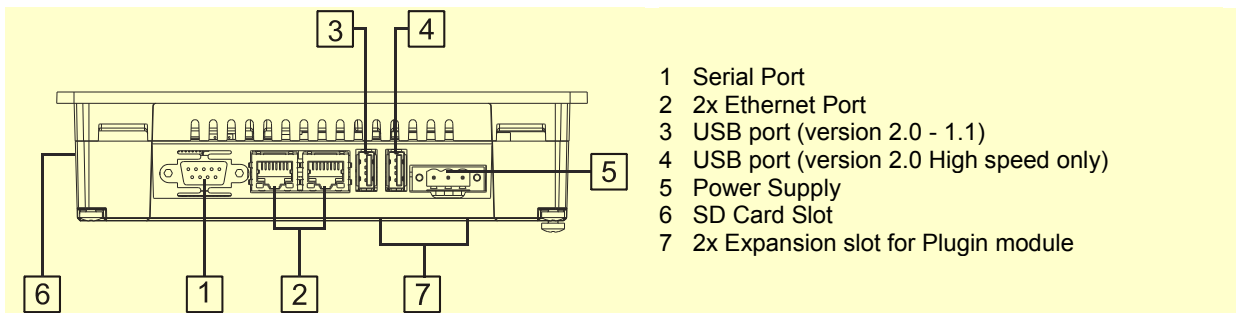

Ordering Information

Model	Part Number	Description
eTOP607M	+ETOP607MU5P1	7" widescreen TFT color with projected capacitive touchscreen. Ethernet, serial and USB interfaces. JMobile runtime.

ptn0435

Ver. 1.0

Copyright © 2014 Exor International S.p.A. – Verona, Italy

Subject to change without notice

The information contained in this document is provided for informational purposes only. While efforts were made to verify the accuracy of the information contained in this documentation, it is provided "as is" without warranty of any kind.

www.exorint.net

ptn0435-0.doc - 30.09.2014