

Logic

# Guard I/O™ Modules

## Overview

### Guard I/O™ Modules Overview

Control and monitor your safety devices with Guard I/O. When used with Rockwell Automation safety controllers, Guard I/O communicates on EtherNet/IP or DeviceNet using CIP Safety protocol. As an effective technology, Guard I/O detects failures at the I/O and field device level, while helping enhance operator protection.

CompactBlock Guard I/O modules are available in IP20 (in-cabinet) form factor. ArmorBlock Guard I/O modules are IP64, IP65, or IP67 (on-machine) form factor (as marked on the product label) . POINT Guard I/O provides maximum I/O density in minimal panel space.

Guard I/O modules offer the following advantages when implementing a safety control system:

- **Reduced engineering** — Onboard, Guard I/O has self-diagnostics, hardware testing, and field circuit testing (short-circuit, wire break, discrepancy) with no additional programming required.
- **Cost-reduced hardware options** — Helps increase ability to safely shutdown an application without additional safety relays.
- **Space-savings** — Monitor and control more safety devices using less panel space.
- **Use of existing network infrastructures** — Connect to standard and safety I/O over one DeviceNet or EtherNet/IP network.
- **Flexibility and easy migration to EtherNet/IP** — The same Guard I/O modules for both DeviceNet and EtherNet/IP networks lets you re-use engineering designs.
- **High safety level** — certified by TÜV for Functional Safety up to SIL 3 and PLe/Category 4.


### Common Guard I/O Module features:

- Integrated pulse test outputs for testing safety circuitry like e-stops and gate switches, for use in applications up to Performance Level e/Category 4. These outputs can also be used independently for standard output control or voltage source to sensors.
- Safety outputs, with integrated pulse testing for use in applications up to PLe, Cat.4.
- Ability to detect at each I/O point:
  - short-circuit to 24V DC or 0V
  - wire breakage
  - discrepancy of dual channel circuitry, due to mechanical alignment or a failure
- All Guard I/O modules have common circuit functionality, operation, programming, troubleshooting, and diagnostics.
- Built in diagnostic LEDs for I/O circuitry and power status.
- I/O point status available to any controller.
- EDS file or Logix 5000 profile compatible.
- Removable and keyed terminal blocks.
- Common power and I/O wiring across Guard I/O modules on DeviceNet and EtherNet/IP networks (1791DS-IB16/1791ES-IB16 and 1791DS-IB8XOBV4/1791ES-IB8XOBV4).
- Safety input power source separate from safety output power source.
- Removable and insertable under power, when following appropriate safety practices.
- Electronic overcurrent protection of all outputs.

	 CompactBlock Guard I/O Modules	 ArmorBlock Guard I/O Modules	 POINT Guard I/O Modules
<b>Description</b>	Cost-effective block I/O for use in an enclosure.	Cost-effective block I/O with IP64, IP65, or IP67 protection (as indicated on the product label) for use on the machine.	Cost-effective I/O modules provide maximum I/O density in minimum panel space.
<b>Digital Safety Inputs</b>	Up to 16 channels	Up to 8 channels	Up to 8 channels
<b>Digital Safety Outputs</b>	Up to 8 channels	Up to 4 channels	Up to 8 channels
<b>Safety Relays</b>	Up to 4 channels (1791DS)	No	No
<b>High Current Capacity Outputs</b>	Up to 2 amps per channel	Up to 2 amps per channel	Up to 1 amp per channel
<b>Use in Hazardous Areas</b>	UL Listed for Class I, Division 2 Group A,B,C,D	No	UL Listed for Class I, Division 2 Group A,B,C,D; ATEX
<b>DeviceNet</b>			
<b>Interface Module</b>	1756-DNB, 1753-DNSI, 1752	1756-DNB, 1753-DNSI, 1752	1734-PDN
<b>Bulletin Number</b>	1791DS	1732DS	1734
<b>EtherNet/IP</b>			
<b>Interface Module</b>	1756-ENBT, 1756-EN2T, 1756-EN2F	Not available	1734-AENT, 1734-AENTR
<b>Bulletin Number</b>	1791ES	Not available	1734

5-Programmable Safety Solutions


**Typical Configurations**

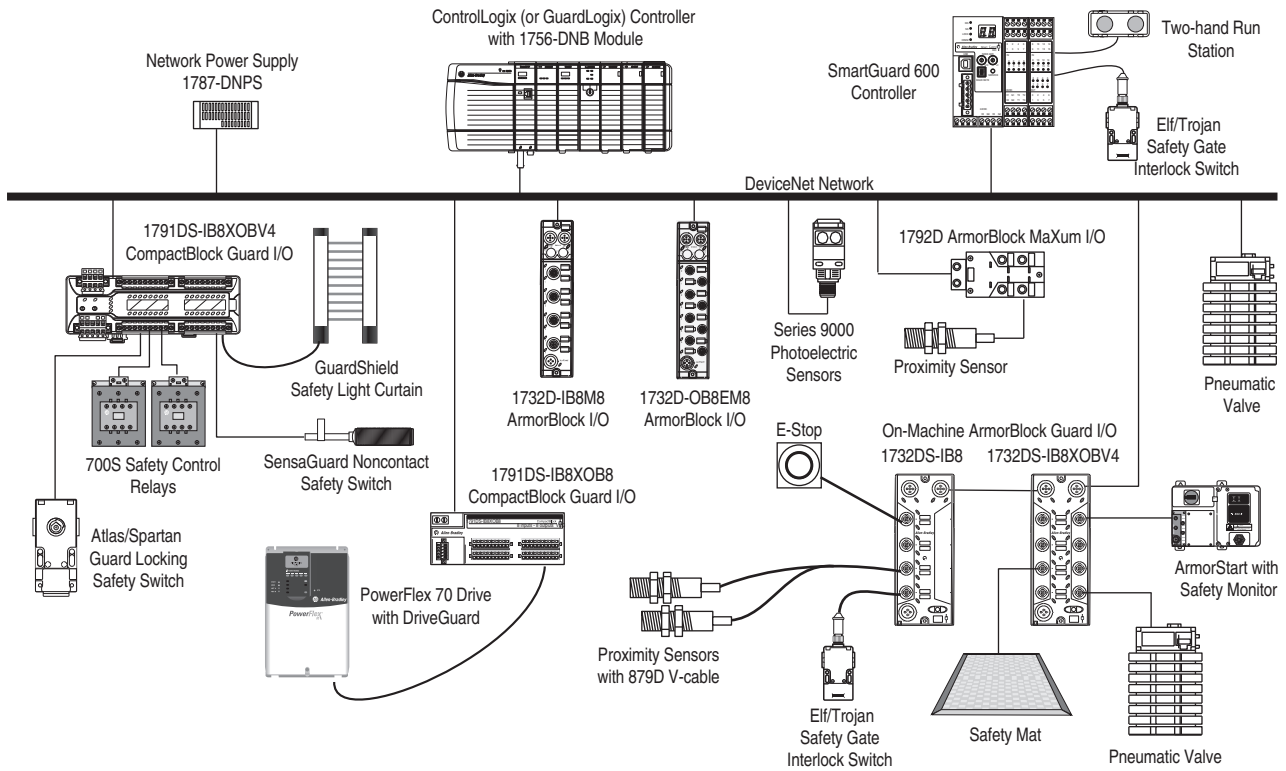

The above example network shows how almost any 24V DC safety-rated or standard sensor can be wired to any Guard I/O module to monitor the machine's status.

**Choosing Your I/O Hardware**

Guard I/O module options are available to minimize associated safety hardware. Additionally, installation costs, wiring time, and commissioning time can be further reduced when using ArmorBlock Guard I/O, as shown in the example below with a light curtain muting application.

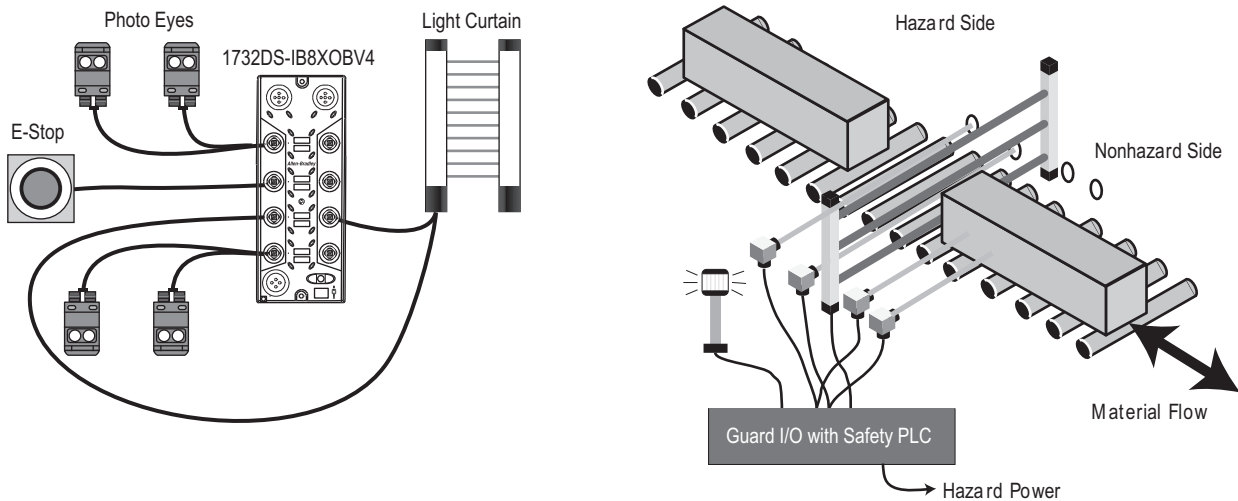

**5-Programmable Safety Solutions**

## Logic

# Guard I/O™ Modules

## Overview/CompactBlock Guard I/O

A variety of CompactBlock Guard I/O is available to suit most every need.

- **1791DS-IB8XOB8 Module.** This module has up to 8 single channel safety inputs and 8 single channel safety outputs. It is often the universally chosen Guard I/O hardware for almost every application. Whether you need single or dual channel safety input or safety output circuits, the 1791DS-IB8XOB8 module is a good choice.
- **1791DS-IB4XOW4 Module.** This module has up to 4 single channel safety inputs and 4 single channel (replaceable) safety relay outputs. This module is often chosen for AC actuators or specialty safety interface applications. Whether you need single or dual-channel safety input or safety output circuits, the 1791DS-IB4XOW4 module is a good choice.
- **1791DS-IB8XOBV4 or 1791ES-IB8XOBV4 Modules.** These modules have up to 8 single channel safety inputs and 4 dual channel sink/source safety outputs, also known as bipolar or two-pole switching. They are often chosen for safety actuators that require more than 0.5 amps. For example, the control of press safety valves or control of the solenoid on a guard-locking switch like the Atlas or Trojan safety products. Whether you need single or dual channel safety input circuits and dual channel safety outputs, the 1791DS-IB8XOBV4 or 1791ES-IB8XOBV4 module will suit most any application.
- **1791DS-IB16 or 1791ES-IB16 Modules.** These modules have up to 16 single channel safety inputs. They are the universal choice of Guard I/O hardware when an application calls for the monitoring of many safety devices in one central location. When your safety application requires 2 safety mats, 2 run stations with 2 e-stops, or any similar configuration, these modules are an excellent and economical choice for every programmable safety system.

## CompactBlock™ Guard I/O™



### Description

CompactBlock Guard I/O provides all the advantages of traditional distributed I/O for safety systems. Distributed safety I/O reduces wiring costs and startup time for machines and cells, as compared to in-chassis I/O. You can use Guard I/O with any safety controller that communicates on DeviceNet or EtherNet/IP networks using CIP Safety, for the control and monitoring of safety circuits. Guard I/O detects circuit failures at each I/O point while providing detailed diagnostics directly to the controller. With CIP Safety you can easily integrate safety and standard control systems by using safety and standard messages on the same wire.

Several Guard I/O blocks are available with a variety of features:

- The 1791DS CompactBlock Guard I/O family consists of 24V DC digital I/O modules that communicate on DeviceNet networks.
- The 1791ES CompactBlock Guard I/O family consists of 24V DC digital I/O modules that communicate on EtherNet/IP networks.

### Benefits

- TÜV Certified as a system with GuardLogix, GuardPLC 1600 and 1800, and SmartGuard 600 controllers
- Supports both standard and safety control
- I/O point-level and other detailed fault diagnostics are available to the PLC or HMI, with the self testing inputs and outputs
- EDS (RSNetWorx for DeviceNet) or RSLogix 5000 profile configuration
- Certified by TÜV for Functional Safety up to SIL 3 according to IEC 61508, and Category 4, PLe according to ISO 13849-1
- Supports single and dual channel devices on inputs and outputs
- Additional standard solid-state outputs that can be configured as pulse test sources, outputs for standard PLC control, 24V DC sources, or for muting lamp control and monitoring
- DIN Rail mounting for easy installation
- Compatible with Guardmaster and similar safety devices

**CompactBlock Guard I/O DeviceNet Safety Module Specifications**

Cat. No.	1791DS-IB12	1791DS-IB16	1791DS-IB8XOB8	1791DS-IB8XOBV4	1791DS-IB4XOW4
Description	24V DC Input Module on DeviceNet Networks	24V DC Input Module on DeviceNet Networks	24V DC Input/Solid-State Output Module on DeviceNet Networks	24V DC Input/Output Module on DeviceNet Networks	24V DC Input / Relay Output Module for DeviceNet Networks
Current Consumption	110 mA @ 24V DC	85 mA @ 24V DC	110 mA @ 24V DC	85 mA @ 24V DC	110 mA @ 24V DC
Operating Voltage Range	20.4...26.4V DC (24V DC, -15...+10%)	19.2...28.8V DC (24V DC, -20...+20%)	20.4...26.4V DC (24V DC, -15...+10%)	19.2...28.8V DC (24V DC, -20...+20%)	20.4...26.4V DC (24V DC, -15...+10%)
<b>Digital Inputs</b>					
Number of Inputs (single-channel)	12 safety	16 safety	8 safety	8 safety	4 safety
Input Type	current sinking	current sinking	current sinking	current sinking	current sinking
Voltage, On-State Input, Min.	11 V DC	11 V DC	11 V DC	11V DC	11V DC
Voltage, Off-State Input, Max.	5V DC	5V DC	5V DC	5V DC	5V DC
Current, On-State Input, Min.	6 mA	3.3 mA	6 mA	3.3 mA	6 mA
<b>Digital Outputs</b>					
Number of Outputs	—	—	8 single-channel, safety solid-state	4 dual channel, safety solid-state	4 single-channel, safety relay
Output Type	—	—	current sourcing	current sourcing/current sinking	relay
Output Current Rating	—	—	0.5 A per point	2.0 A continuous	2 A max. per contact
Output Leakage Current, Max.	—	—	0.1 mA	± 1.0 mA	—
Service Life, Electrical	—	—	—	—	100 000 operations, min.
Short Circuit Protection	—	—	Yes	Yes	No
<b>Standard Pulse Test Outputs</b>					
Number of Pulse Test Sources	4	16	4	8	4
Pulse Test Output Current	0.7 A per point	0.7 A per point	0.7 A per point	0.7 A per point	0.7 A per point
Short Circuit Protection	Yes	Yes	Yes	Yes	Yes
<b>General</b>					
Temperature, operating	-10...55° C (14...131 °F)	-20°C...+60°C (-4°F...+140°F)	-10...55° C (14...131 °F)	-20°C...+60°C (-4°F...+140°F)	-10...55° C (14...131 °F)
Relative Humidity	5...95% noncondensing	5...95% noncondensing	10...95% noncondensing	5...95% noncondensing	10...85% noncondensing
Vibration	5 g @ 57...150 Hz	5 g @ 10...500 Hz	5 g @ 57...150 Hz	5 g @ 10...500 Hz	5 g @ 57...150 Hz
Shock, operating	15 g	30 g	15 g	30 g	10 g
Enclosure Protection	IP20	IP20	IP20	IP20	IP20
Dimensions (HxWxD), Metric	68 x 170 x 72 mm*	81 x 170 x 76 mm*	68 x 170 x 72 mm*	81 x 170 x 76 mm*	95 x 170 x 83 mm*
Certifications†	UL, CE, C-Tick, CSA, UL Class I Div 2 Hazardous, UL NRGF, ODVA Conformance, certified by TÜV for Functional Safety up to SIL 3 and Cat. 4, PLe	UL, CE, C-Tick, CSA, UL Class I Div 2 Hazardous, ODVA Conformance, certified by TÜV for Functional Safety up to SIL 3 and Cat. 4, PLe	UL, CE, C-Tick, CSA, UL Class I Div 2 Hazardous, UL NRGF, ODVA Conformance, certified by TÜV for Functional Safety up to SIL 3 and Cat. 4, PLe	UL, CE, C-Tick, CSA, UL Class I Div 2 Hazardous, ODVA Conformance, certified by TÜV for Functional Safety up to SIL 3 and Cat. 4, PLe	UL, CE, C-Tick, CSA, UL NRGF, ODVA Conformance, TÜV certified for functional safety up to SIL 3 and Cat. 4, PLe

\* Includes DIN latch and connectors.

† When product is marked. See the Product Certification link at <http://www.ab.com/certification> for Declarations of Conformity, Certificates, and other certification details.

All specifications are subject to change. Refer to product installations instructions.

## Logic

## Guard I/O™ Modules

## CompactBlock Guard I/O

## CompactBlock Guard I/O EtherNet/IP Safety Module Specifications

Cat. No.	1791ES-IB16	1791ES-IB8XOBV4
Description	24V DC Input Module on EtherNet/IP	24V DC Input/Output Module on EtherNet/IP
Current Consumption	250 mA @ 24V DC	250 mA @ 24V DC
Operating Voltage Range	19.2...28.8V DC (24V DC, -20...+20%)	19.2...28.8V DC (24V DC, -20...+20%)
<b>Digital Inputs</b>		
Number of Inputs	16 single channel; 8 dual channel	8 single channel; 4 dual channel
Input Type	current sinking	current sinking
Voltage, On-State Input, Min.	11 V DC	11 V DC
Voltage, Off-State Input, Max.	5V DC	5V DC
Current, On-State Input, Min.	3.3 mA	3.3 mA
<b>Digital Outputs</b>		
Number of Outputs	0	4 dual channel
Output Type	—	Current sourcing/current sinking - bipolar pair
Output Current Rating	—	2.0 A continuous
Short Circuit Protection	Yes	Yes
<b>Standard Pulse Test Outputs</b>		
Number of Pulse Test Sources	16 current sourcing	8 current sourcing
Pulse Test Output Current	0.7 A per point	0.7 A per point
Short Circuit Protection	Yes	Yes
<b>General</b>		
Temperature, operating	-20...60° C (-4...140° F)	-20...60° C (-4...140° F)
Relative Humidity	5...95% noncondensing	5...95% noncondensing
Vibration	5 g at 10...500 Hz	5 g at 10...500 Hz
Shock, operating	30 g	30 g
Enclosure Protection	IP20	IP20
Dimensions (HxWxD), Metric	80 x 196 x 77 mm*	80 x 196 x 77 mm*
Certifications†	cULus, CE, C-Tick, CSA, UL Class I Div 2 Hazardous, UL NRGF, ODVA Conformance, certified by TÜV and UL for Functional Safety up to SIL 3 and Cat. 4, PLe	cULus, CE, C-Tick, CSA, UL Class I Div 2 Hazardous, UL NRGF, ODVA Conformance, certified by TÜV and UL for Functional Safety up to SIL 3 and Cat. 4, PLe

\* Includes terminal block.

† When product is marked. See the Product Certification link at <http://www.ab.com/certification> for Declarations of Conformity, Certificates, and other certification details.

All specifications are subject to change. Refer to product installations instructions.

### ArmorBlock® Guard I/O™



#### Description

ArmorBlock® Guard I/O™ provides all the advantages of traditional distributed I/O for safety systems, but has an IP64, IP65, or IP67 package (as marked on the product label) that can be mounted directly on your machine. On-machine safety I/O reduces wiring time and startup costs for safety controller applications by eliminating electrical boxes and simplifying cable installation. The ArmorBlock family provides industrially hardened I/O blocks that you can mount directly on equipment near sensors or actuators. Wiring the I/O to the sensors and actuators is easy using pre-wired quick disconnect cables.

You can use Guard I/O with any safety controller that communicates on DeviceNet using CIP Safety for the control and monitoring of safety circuits. Guard I/O detects circuit failures at each I/O point while providing detailed diagnostics directly to the controller. With CIP Safety, you can easily integrate safety and standard control systems by using safety and standard messages on the same wire.

The 1732DS ArmorBlock Guard I/O family consists of 24V dc digital I/O modules that communicate on DeviceNet networks. The I/O connectors are sealed M12 micro style while the network and auxiliary power connectors are sealed mini style. Plus, the ArmorBlock Guard I/O uses the same input and output M12 pin configuration as standard ArmorBlock and Maxum.

#### Benefits

- IP64, IP65, or IP67 rated for direct mounting on machine without an enclosure (rating is marked on the product label)
- Compact footprint
- Quick disconnect dual-channel M12 I/O connectors allow a single cable connected between ArmorBlock Guard I/O and a dual-channel safety device (See the following table of Allen-Bradley Guardmaster safety devices)
- TÜV certified as a system with GuardLogix, GuardPLC1600/1800, SmartGuard 600 controllers
- Supports both standard and safety control
- Supports single and dual-channel devices on inputs and outputs
- I/O point-level and other detailed fault diagnostics are available to the PLC or HMI with self-testing inputs and outputs
- EDS (RSNetWorx for DeviceNet) or RSLogix 5000 profile configuration
- Certified by TÜV and UL for Functional Safety up to SIL 3 according to IEC 61508, and PLe/Category 4, according to ISO 13849-1
- Additional standard solid-state outputs can be configured as pulse test sources, outputs for standard PLC control, 24V dc sources, or muting lamp control and monitoring

#### Specifications

Cat. No.	1732DS-IB8	1732DS-IB8XOBV4
Description	24V DC Input Module for DeviceNet Networks	24V DC Input/Output Module on DeviceNet Networks
Current Consumption	85 mA @ 24V DC	
I/O Operating Voltage Range	19.2V...28.8 V DC (24V DC, -20...+20%)	
<b>Digital Inputs</b>		
Number of Inputs	8 safety single-channel or 4 safety dual-channel	
Input Type	current sinking	
Voltage, On-State Input, Min.	11V DC	
Voltage, Off-State Input, Max.	5V DC	
Current, On-State Input, Min.	3.3 mA	
<b>Digital Outputs</b>		
Number of Outputs	—	4 safety solid-state
Output Type	—	dual channel, current sourcing/current sinking pair
Output Current Rating	—	2.0 A max per point
Short Circuit Protection	—	Yes
<b>Standard Pulse Test Outputs</b>		
Number of Pulse Test Sources	8	
Pulse Test Output Current	0.7 A per point	
Short Circuit Protection	Yes	
<b>General</b>		
Temperature, operating	-20°...+60°C (-4°C...+140°F)	
Relative Humidity	10...95% non-condensing	
Vibration	0.76 mm @ 10...500 Hz	
Shock, operating	30 g	
Enclosure Protection	IP64, IP65, or IP67 as marked on the product label	
Dimensions (HxWxD), Metric	179 x 70 x 68.7 mm*	
Dimensions (HxWxD), Imperial	7.05 x 2.76 x 2.71 in*	
Weight, Metric	600 g	
Weight, Imperial	1.2 lb	
Certifications*	UL, GE, C-Tick, CSA, UL NRGF, ODVA Conformance, certified by TÜV for Functional Safety up to SIL 3 and PLe/Cat. 4	

\* Includes terminal block.

\* When product is marked. See the Product Certification link at <http://www.ab.com/certification> for Declarations of Conformity, Certificates, and other certification details.

All specifications are subject to change. Refer to product installations instructions.

Logic

Guard I/O™ Modules

ArmorBlock Guard I/O

Safety Products that Connect Directly to ArmorBlock Guard I/O with a Single 5-Pin Micro (M12) Patchcord\*



Product Family	Actuator Type	Cat. No. (with M12)	Catalog Page
Elf	Flat	440K-E2NNFPS	3-11
	Semi-flexible	440K-E2NNAPS	3-11
Cadet	Flat	440K-C2NNFPS	3-15
	Semi-flexible	440K-C2NNAPS	3-15
Trojan T15	Standard	440K-V2NNSPS	3-19
	Fully-flexible	440K-V2NNBPS	3-19
Trojan T15-GD2	GD2 Standard	440K-V2NNGPS	3-19
Trojan T5	Standard	440K-T2NBSPS	3-23
	Fully-flexible	440K-T2NBBPS	3-23
Trojan T5-GD2	GD2 Standard	440K-T2NBGPS	3-23
	None	440K-M2NBNDSDS	3-29
MT-GD2, Case Color Red with Snap-acting Contacts	None	440K-M2NANDSDS	3-29
	None	440K-M2NANYSDS	3-29
Sprite	Solid - 50xØ10 mm	440H-S2NNPPS	3-91
	Pre-bored - 30xØ16 mm	440H-S2NNHPS	3-91
Ensign	Solid - 50xØ10 mm	440H-E2NNPPS	3-95
	Pre-bored - 30xØ16 mm	440H-E2NNHPS	3-95
Lifeline3	N/A	440E-D2NNNYS	[S-3503977]
Lifeline4	N/A	440E-L2NNNYS	4-11
Emergency Stop	N/A	800F-1YMQ53V	4-43
Safety Mats	N/A	440F-MxxxHxNN	2-94


\* Only the 2 N.C. safety contacts of the safety switches are connected to the 5-pin micro (M12) connector.

1732DS ArmorBlock Guard I/O Micro Connector Pin Assignments

Input Configuration		Female	Output Configuration	
Pin	Signal		Pin	Signal
1	Test Output n+1		1	Output +24V dc Power
2	Safe Input n+1		2	Output n+1 (Sinking)
3	Input Common		3	Output Power Common
4	Safe Input n		4	Output n (Sourcing)
5	Test Output n		5	Output Power Common

**1732DS ArmorBlock Guard I/O Mini Connector Pin Assignments**

ArmorBlock Guard I/O DeviceNet Configuration			
Pin	Signal	Male	Female
1	Drain		
2	V+ (Red)		
3	V- (Black)		
4	CAN_H (White)		
5	CAN_L (Blue)		

ArmorBlock Guard I/O Power Configuration		
Pin	Signal	Male
1	Output +24V dc Power (Red)	
2	Input +24V dc Power (Green)	
3	Input Power Common (White)	
4	Output Power Common (Black)	

**ArmorBlock Guard I/O Recommended Compatible Cables and Connectors\***

Description	Cat. No.
 DC Micro (M12) Male Cordset	889D-M5AC-⌘
 DC Micro Style Patchcord	889D-F5ACDM-‡
 DC Micro V-Cable for Single-Channel Sensors	879D-F4ACD5M-§
 M12 Single-Channel Splitter	879D-F4D5M
 M12 Terminal Chamber—Straight Male	871A-TS5-DM
 M12 Terminal Chamber—Right Angle Male	871A-TR5-DM

\* All cables must use 5-pin connections for ArmorBlock Guard I/O M12 input compatibility.  
 ⌘ Replace symbol with 0M3 (0.3 m), 2 (2 m), or 5 (5 m) for standard cable length.  
 ‡ Replace symbol with 1 (1 m), 2 (2 m), 5 (5 m), or 10 (10 m) for standard cable length.  
 § Replace symbol with 0M3 (0.3 m), 1 (1 m), 2 (2 m), or 5 (5 m) for standard cable length.

5-Programmable Safety Solutions




## Logic


# Guard I/O™ Modules

## ArmorBlock Guard I/O

### Single Channel Wiring (879D-F4ACD5M and 1485P-PID5-RR4)

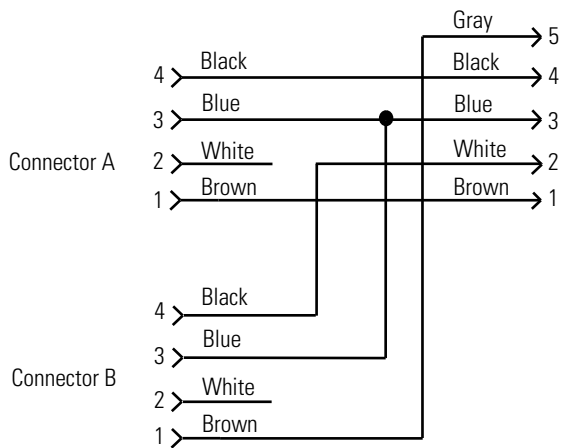

## POINT Guard I/O™

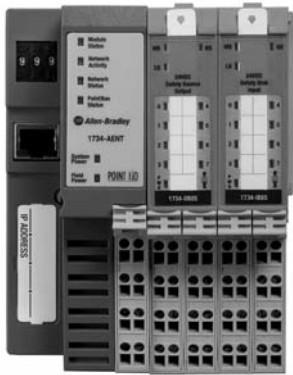

## Description

POINT Guard I/O™ modules are safety-rated I/O modules designed to fit into the standard POINT I/O system, offering automation and safety functionality in a maximum density I/O solution. They are ideal for use in applications requiring safety and automation control. They communicate by using CIP Safety protocol over EtherNet/IP for GuardLogix controllers or DeviceNet for SmartGuard safety controllers. The application of CIP Safety protocol allows simultaneous transmission of safety and automation control and diagnostic data over one CIP network.

POINT Guard I/O and POINT I/O can be controlled by one GuardLogix controller for both safety and automation control through one node. If separate safety control is required, a GuardLogix controller can be used with POINT Guard I/O for safety control and a ControlLogix controller can be used with POINT I/O for automation control. No changes are required to the POINT I/O system.

This solution is ideal for applications requiring maximum I/O density in minimum panel space. The advanced solid-state design allows for module replacement in minutes and helps reduce the need for special maintenance or training.

POINT Guard I/O is designed for use with industrial equipment and is especially suited for robotic, point-of-operation, guard-monitoring, and distributed control applications.

## Benefits

- Mix safety inputs and outputs with standard POINT I/O, all with one node
- Maximum I/O density in minimum panel space
- Simple to add to existing panels using POINT I/O
- I/O point-level diagnostics quickly identify problems and reduce downtime
- Easy configuration by using RSLogix 5000 with full support of IP addressing
- Optimize installations by assigning individual test output for safety input device
- Connect single and dual-channel safety devices on inputs and outputs
- Certified by TÜV for Functional Safety up to SIL 3 according to IEC 61508, and PLe/Category 4, according to ISO 13849-1
- Muting lamp control and monitoring on selected test pulse outputs

## Networking with POINT Guard I/O™

POINT Guard I/O™ modules are used in the POINT I/O platform and can communicate safety messages via network adapters to connect to EtherNet/IP or DeviceNet networks. Use these adapters for network communication.

Network	System	Adapter*
EtherNet/IP	GuardLogix	1734-AENT
		1734-AENTR
DeviceNet	SmartGuard 600	1734-PDN

\* Not compatible with 1734-ADN, 1734-ADNX, 1734-AP, or 1734-ACNR adapters.

## Specifications

Cat. No.	1734-IB8S	1734-OB8S
Description	Point I/O 24V DC 8 Input Safety Module	Point I/O 24V DC 8 Output Safety Module
PointBus Current (mA), Max.	175	190
Operating Voltage Range	19.2...28.8V DC	19.2...28.8V DC

## Digital Inputs

Number of Inputs	8	—
Input Type	Current Sinking	—
Voltage, On-State Input, Min.	11V DC	—
Voltage, Off-State Input, Max.	5V DC	—
Current, On-State Input, Min.	3.3 mA	—
Input Delay Time, Off to On	16.2 ms max	—
Input Delay Time, On to Off	—	—

## Digital Outputs

Number of Outputs	—	8
Output Type	—	Current Sourcing
Output Current Rating, Max.	—	1 A max per point
Leakage Current, Off-State Output, Max.	—	0.1 mA
Output Delay Time, Off to On, Max.	—	6.2 ms‡
Output Delay Time, On to Off, Max.	—	6.2 ms§
Short Circuit Protection	—	Yes, Electronic
Overcurrent Detection	—	Yes

## Standard Pulse Test Outputs

Number of Pulse Test Sources	4	—
Pulse Test Output Current	0.7A per point	—
Pulse Test Output Leakage Current, Max.	0.1 mA	—
Short Circuit Protection	Yes	—

## General

Temperature, operating	-20...55 °C (-4...131 °F)
Temperature, nonoperating	-40...85 °C (-40...185 °F)
Relative Humidity	5...95% noncondensing
Vibration	5 g at 10...500 Hz
Shock, operating	30 g
Enclosure Protection	IP20
Dimensions (HxWxD), Metric	77.0 x 25.0 x 55.0 mm*
Dimensions (HxWxD), Imperial	3.03 x 0.98 x 2.17 in*
Weight, Metric	62.4 g
Weight, Imperial	2.2 oz
Certifications*	CE, C-Tick, CSA, ODVA Conformance, certified by TÜV for Functional Safety up to SIL 3 and PLe/Cat. 4

**Note:** All specifications are subject to change. Refer to product installation instructions.

\* Includes terminal block.

‡ When product is marked. See the Product Certification link at <http://www.ab.com/certification> for Declarations of Conformity, Certificates, and other certification details.

‡ Off/on delay is time from a valid output "on" signal to output energization.

§ On/off delay is time from a valid output "off" signal to output deenergization.