

MICO FUZE 24 LED

MICO FUZE 24 LED
8 channels
Total current:: max. 40 A

Image

Vicarious picture

Approvals**Technical Data**

Operating voltage	24 V DC
Operating voltage range	18...30 V DC
Operating current	max. 6 A (40°C)
Total current	max. 40 A
Number of channels	8 channels
Group alarm output	max. 20 mA; high: all channels ON; low: not all channels ON

General data

Connection	Spring clamp terminals
Input terminals	1 × 16 mm ²
Output terminals	per output 1 × 4 mm ²
Alarm terminals	2.5 mm ²
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+55 °C


Commercial data

Net weight	150
Weight unit	gram
Basic unit	pc.
Customs tariff number	85363030
Unit (piece)	1
Limited value	1

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 12/12

Circuit diagram

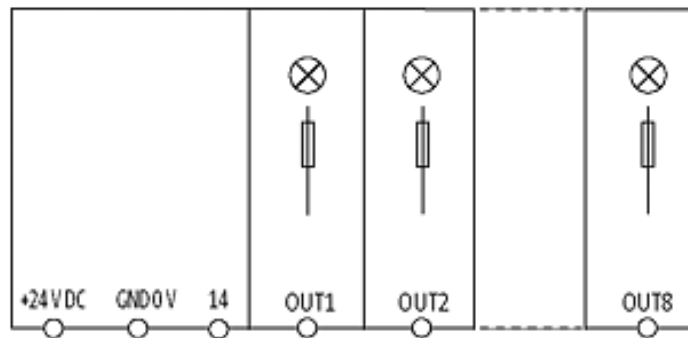

Dimension drawing

