

MICO FUSE 250 fuse holder 5x20mm, 8 channels IN: 250V AC/DC OUT: 250V AC/DC / 6A AC/DC

MICO FUSE 250
8 channels
Total current:: max. 40 A

Image



Vicarious picture

Approvals



Technical Data

Operating voltage	max. 250 V DC/AC
Operating voltage range	max. 250 V DC/AC
Operating current	max. 6 A (40°C)
Total current	max. 40 A
Number of channels	8 channels


General data

Connection	Spring clamp terminals
Input terminals	1 × 16 mm ²
Output terminals	1 × 0.5...4 mm ²
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	-25...+55 °C

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 12/12

Circuit diagram

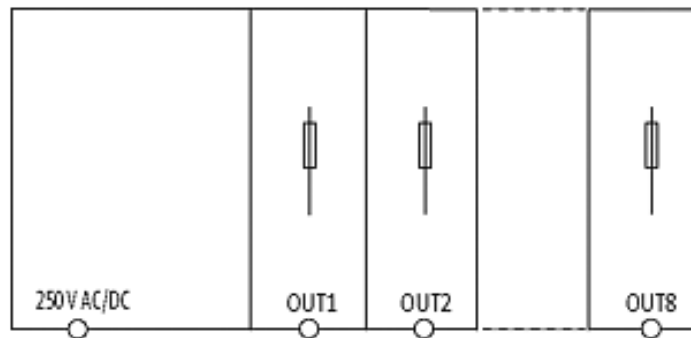

Dimension drawing

