



Electromagnetic Inductive RFID System V640

Enables reading and writing transponders for various Semiconductor applications, such as FOUPs (Front-Opening Unified Pods), reticles, and pods.

- Conforms to Carrier Reader/Writer-related SEMI standards; SEMI E99, E4, and E5.
- Antenna dimensions conform to SEMI E15.1.
- Reads/writes data embedded in a 32-mm Glass Multipage Transponder (RI-TRP-DR2B).
- Noise measurement function for detecting proper placement of Antenna.
- Shielded antenna reduces influence of surrounding metal.
- CE marking/FCC approvals



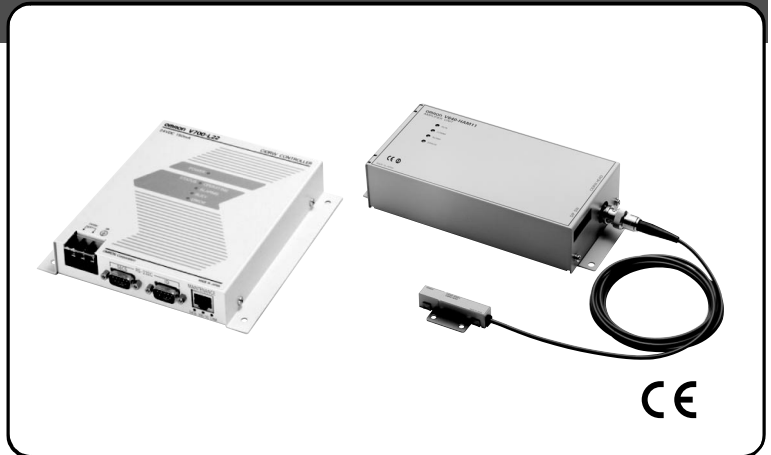

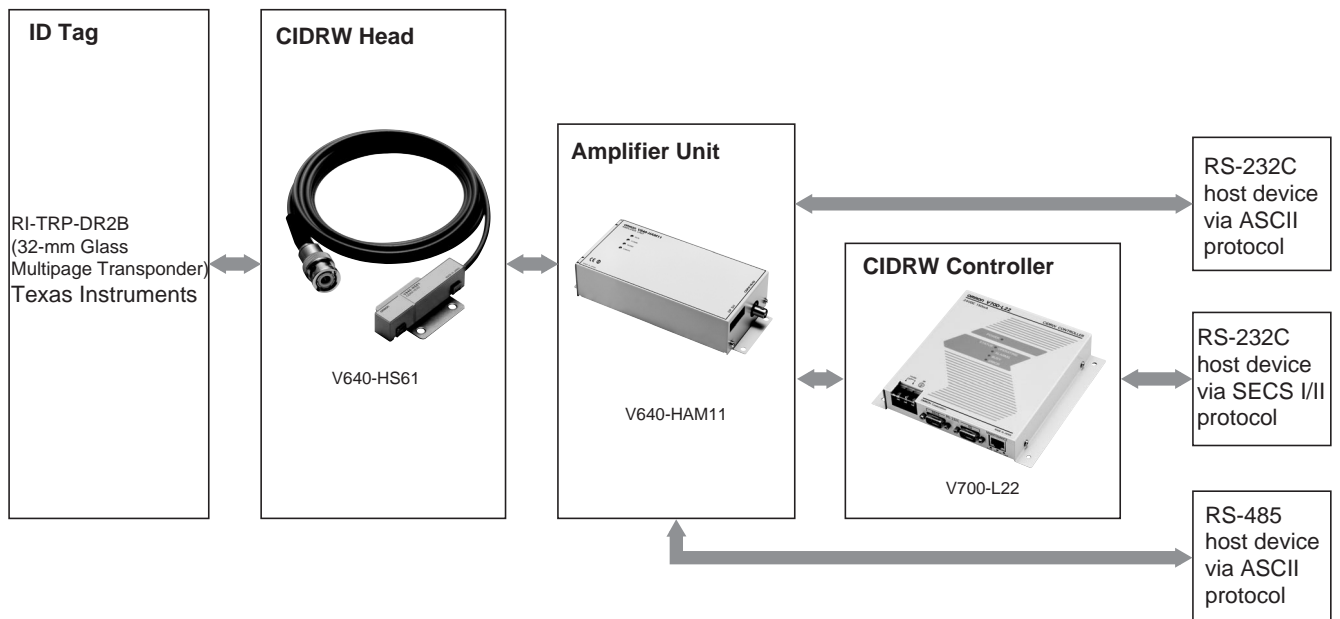

System Configuration



- Note 1.** Use of the V700-L11 ID Link Unit enables the Amplifier Unit to be removed/installed while the CIDRW System remains turned ON in the event of a malfunction or during maintenance.
- 2.** Use the V700-L22 CIDRW Controller when using SECS communications protocol.
- 3.** Refer to the User's Manual (Cat. No. Z167) for details.

Ordering Information

■ List of Models


Name	Model		Specifications/Design	
CIDRW Head	V640-HS61		50 × 30 × 12 mm (including mounting plate)	2-meter cable
Amplifier Unit	V640-HAM11		80 × 185 × 43 mm	RS-232C interface RS-485 interface 24 VDC
CIDRW Controller	V700-L22		150 × 167 × 28 mm	24 VDC RS-232C interface (Compatible with SECS I/II protocol.)
ID Link Unit	V700-L11		110 × 65 × 64 mm	24 VDC RS-232C interface RS-485 interface
Accessories	V640-A90		Connector accessories for the V640 Amplifier Unit Power Supply Connector (1) Power Supply Connector Pins (3) RS-485 Port Connector (1) (See Note.)	

Note: V640-A90 includes all of these accessories as a set. To purchase individual accessories, contact the manufacturers below directly.


To Purchase Individual Accessories		
Name	Model	Manufacturer
Power Supply Connector	1-178288-3	Tyco Electronics
Power Supply Connector Pins	175217-3	
RS-485 Port Connector	MSTB2.5/2-STF-5.08	Phoenix Contact Inc.

Specifications


■ CIDRW Head

Item	 V640-HS61
Transmission frequency	134 kHz
Insulation resistance	20 MΩ min. (at 100 VDC) between the connector terminals and the case
Dielectric strength	1,000 VAC (50/60 Hz, 1 minute) between the connector terminals and the case (leakage current: 5 mA max.)
Vibration resistance	10 to 150 Hz, 0.20-mm double amplitude, 15-m/s ² acceleration with 10 sweeps of 8 min each in X, Y, and Z directions
Shock resistance	150-m/s ² acceleration for 3 times each in X, Y, and Z directions (18 times in total)
Ambient operating temperature	0 to 40°C (with no icing)
Ambient operating humidity	35% to 85% (with no condensation)
Ambient storage temperature	-15 to 65°C (with no icing)
Ambient storage humidity	35% to 85% (with no condensation)
Degree of protection	IEC60529: IP20
Cable	2-m (3-mm dia.) coaxial cable
Case	ABS/epoxy resin, stainless-steel mounting fixture
Weight	Approx. 70 g


■ Amplifier Unit

Item	 V640-HAM11
Host interface	RS-232C (via dedicated 1:N protocol) or RS-485 (via dedicated 1:N protocol)
Power supply voltage	24 VDC (max. fluctuation 20.4 to 26.4 VDC)
Power consumption	3 W max.
Insulation resistance	20 MΩ min. (at 100 VDC) between the power supply terminals and the frame ground terminal
Dielectric strength	1,000 VAC (50/60 Hz, 1 minute) between the power supply terminals and the frame ground terminal (leakage current: 5 mA max.)
Vibration resistance	10 to 150 Hz, 0.20-mm double amplitude, 15-m/s ² acceleration with 10 sweeps of 8 min each in X, Y, and Z directions
Shock resistance	150-m/s ² acceleration for 3 times each in X, Y, and Z directions (18 times in total)
Ambient operating temperature	0 to 40°C (with no icing)
Ambient operating humidity	35% to 85% (with no condensation)
Ambient storage temperature	-15 to 65°C (with no icing)
Ambient storage humidity	35% to 85% (with no condensation)
Degree of protection	IEC60529: IP20
Case	SECC (coated)
Ground	Ground at a resistance of less than 100 Ω
Weight	Approx. 500 g

■ CIDRW Controller


Item	V700-L22 
Host interface	RS-232C
Power supply voltage	24 VDC (max. fluctuation 20.4 to 26.4 VDC)
Power consumption	150 mW max.
Insulation resistance	50 MΩ min. (at 500 VDC) between the power supply terminals and the frame ground terminal
Dielectric strength	500 VAC (50/60 Hz, 1 minute) between the power supply terminals and the ground terminal (leakage current: 3.5 mA max.)
Vibration resistance	10 to 150 Hz, 0.20-mm double amplitude, 15-m/s ² acceleration with 10 sweeps of 8 min each in X, Y, and Z directions
Shock resistance	150-m/s ² acceleration for 3 times each in X, Y, and Z directions (18 times in total)
Ambient operating temperature	0 to 40°C (with no icing)
Ambient operating humidity	10% to 85% (with no condensation)
Ambient storage temperature	-15 to 65°C (with no icing)
Ambient storage humidity	10% to 95% (with no condensation)
Degree of protection	IEC60529: IP20
Ground	Ground at a resistance of less than 100 Ω
Weight	Approx. 580 g

■ ID Link Unit

Item	V700-L11 
Host interface	RS-232C or RS-485
Power supply voltage	24 VDC (max. fluctuation 20.4 to 26.4 VDC)
Power consumption	10 W max.
Insulation resistance	50 MΩ min. (at 500 VDC) between the power supply terminals and the frame ground terminal
Dielectric strength	1,000 VAC (50/60 Hz, 1 minute) between the power supply terminals and the frame ground terminal (leakage current: 5 mA max.)
Vibration resistance	10 to 150 Hz, 0.20-mm double amplitude, 15-m/s ² acceleration with 10 sweeps of 8 min each in X, Y, and Z directions
Shock resistance	150-m/s ² acceleration for 3 times each in X, Y, and Z directions (18 times in total)
Ambient operating temperature	0 to 40°C (with no icing)
Ambient operating humidity	35% to 85% (with no condensation)
Ambient storage temperature	-15 to 50°C (with no icing)
Ambient storage humidity	35% to 85% (with no condensation)
Degree of protection	IEC60529: IP20
Ground	Ground at a resistance of less than 100 Ω. If grounding is not performed properly, transmission specifications may be adversely affected by the surrounding environment.
Weight	Approx. 200 g

Applicable SEMI Standards

■ CIDRW System Conforming to SEMI Standards

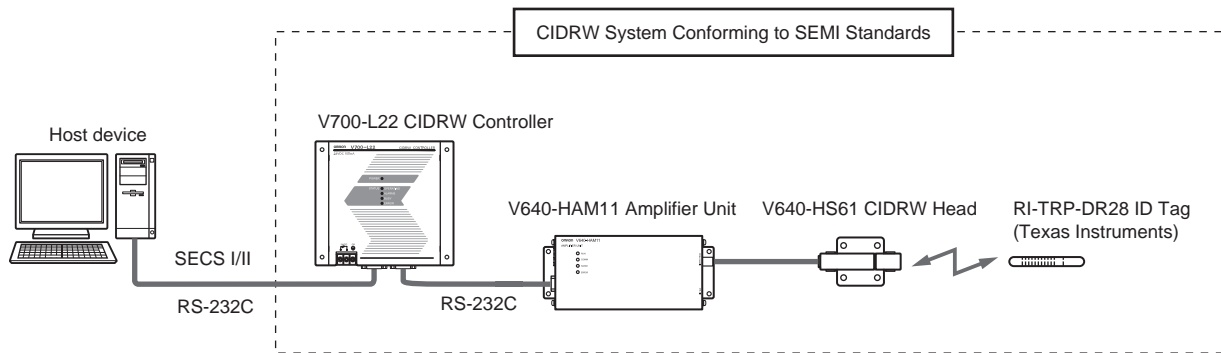

The Carrier ID Reader Writer (CIDRW) System is an RFID system that conforms to SEMI standards. The V700-L22 CIDRW Controller, the V640-HAM11 Amplifier Unit, the V640-HS61 CIDRW Head, and a Texas Instruments ID Tag can be used to configure a Carrier ID Reader Writer (CIDRW) System that conforms to the following standards:

- SEMI E99 CARRIER ID READER/WRITER FUNCTIONAL STANDARD
- SEMI E5 EQUIPMENT COMMUNICATIONS STANDARD 2 MESSAGE CONTENT (SECS-II)
- SEMI E4 EQUIPMENT COMMUNICATIONS STANDARD 1 MESSAGE TRANSFER (SEC- I)


Note: SEMI: Semiconductor Equipment and Materials International (Refer to SEMI for standards information. (SEMI URL: <http://www.semi.org/>)).
 SECS: SEMI Equipment Communications Standard
 Refer to the User's Manual (Cat. No. Z167) for details.
 V700-L22 conforms to SEMI E99-0303 (issued in March 2003).

Dimensions


Note: All units are in millimeters unless otherwise indicated.

Amplifier Unit

V640-HAM11

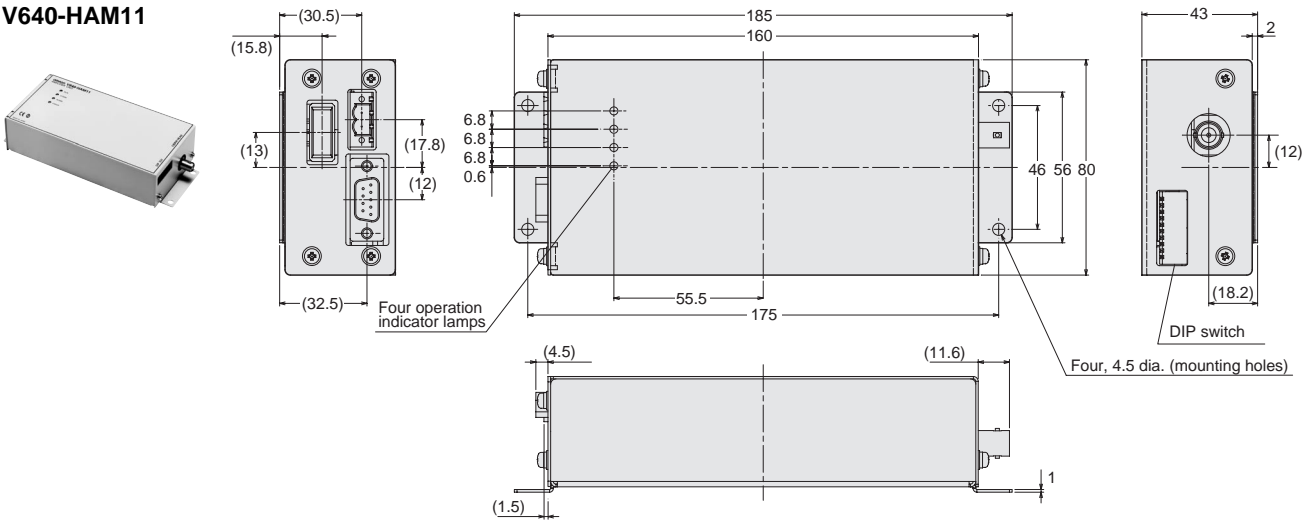


Mounting Hole Dimensions

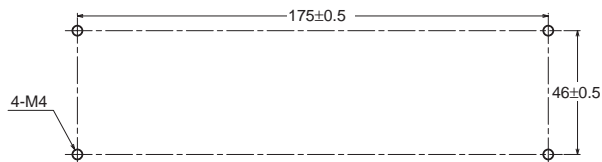


CIDRW Head

V640-HS61

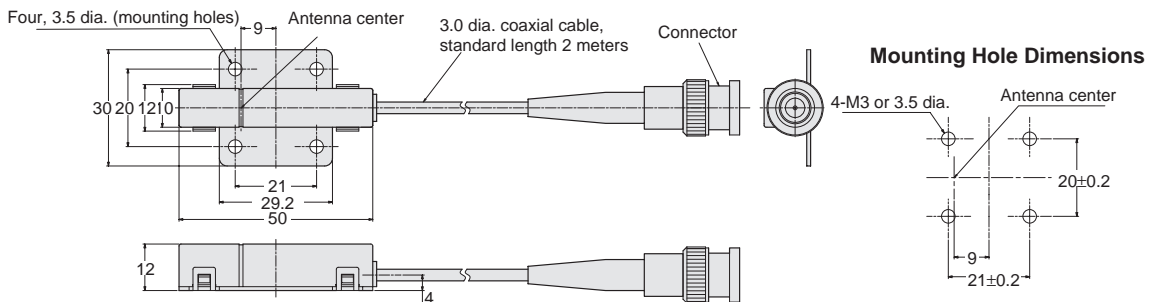


Mounting Hole Dimensions




CIDRW Controller


V700-L22

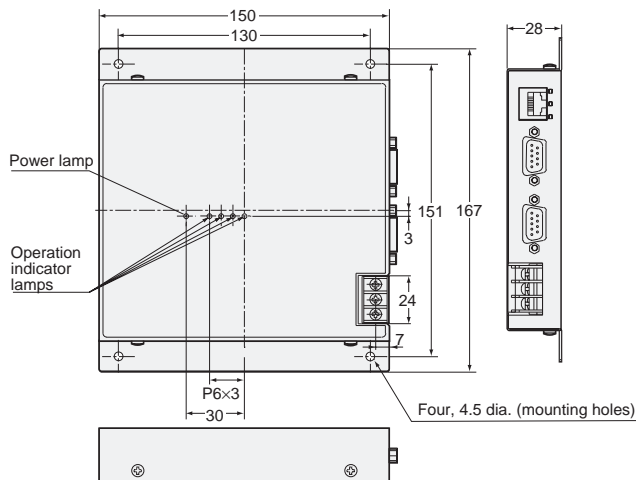

Mounting Hole Dimensions



**ID Link Unit
V700-L11**

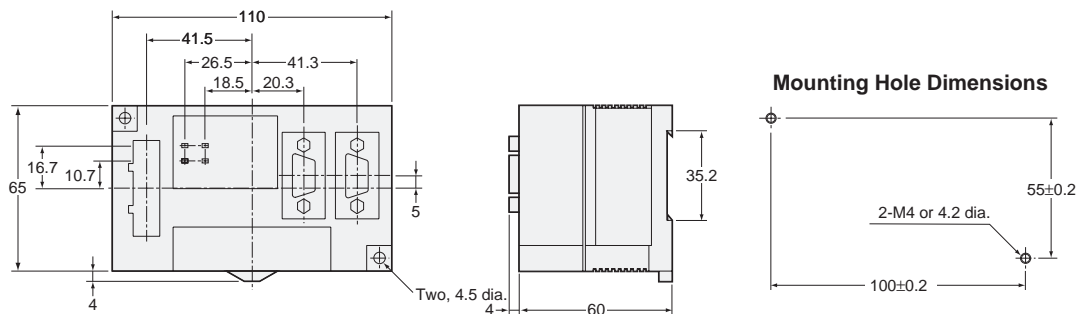

Warranty and Application Considerations

Read and Understand this Catalog

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranty and Limitations of Liability

WARRANTY

OMRON's exclusive warranty is that the products are free from defects in materials and workmanship for a period of one year (or other period if specified) from date of sale by OMRON.

OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, REGARDING NON-INFRINGEMENT, MERCHANTABILITY, OR FITNESS FOR PARTICULAR PURPOSE OF THE PRODUCTS. ANY BUYER OR USER ACKNOWLEDGES THAT THE BUYER OR USER ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE. OMRON DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED.

LIMITATIONS OF LIABILITY

OMRON SHALL NOT BE RESPONSIBLE FOR SPECIAL, INDIRECT, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS, OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED ON CONTRACT, WARRANTY, NEGLIGENCE, OR STRICT LIABILITY.

In no event shall the responsibility of OMRON for any act exceed the individual price of the product on which liability is asserted.

IN NO EVENT SHALL OMRON BE RESPONSIBLE FOR WARRANTY, REPAIR, OR OTHER CLAIMS REGARDING THE PRODUCTS UNLESS OMRON'S ANALYSIS CONFIRMS THAT THE PRODUCTS WERE PROPERLY HANDLED, STORED, INSTALLED, AND MAINTAINED AND NOT SUBJECT TO CONTAMINATION, ABUSE, MISUSE, OR INAPPROPRIATE MODIFICATION OR REPAIR.

Application Considerations

SUITABILITY FOR USE

OMRON shall not be responsible for conformity with any standards, codes, or regulations that apply to the combination of products in the customer's application or use of the products.

Take all necessary steps to determine the suitability of the product for the systems, machines, and equipment with which it will be used.

Know and observe all prohibitions of use applicable to this product.

NEVER USE THE PRODUCTS FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCTS ARE PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Disclaimers

PERFORMANCE DATA

Performance data given in this catalog is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of OMRON's test conditions, and the users must correlate it to actual application requirements. Actual performance is subject to the OMRON *Warranty and Limitations of Liability*.

CHANGE IN SPECIFICATIONS

Product specifications and accessories may be changed at any time based on improvements and other reasons. Consult with your OMRON representative at any time to confirm actual specifications of purchased product.

DIMENSIONS AND WEIGHTS

Dimensions and weights are nominal and are not to be used for manufacturing purposes, even when tolerances are shown.

ERRORS AND OMISSIONS

The information in this document has been carefully checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical, or proofreading errors, or omissions.

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. Z191-E1-01

In the interest of product improvement, specifications are subject to change without notice.

OMRON Corporation

Industrial Automation Company

FA Auto-Identification Components Department
Sensing Devices & Components Division H.Q.

Shiokoji Horikawa, Shimogyo-ku,
Kyoto, 600-8530 Japan

Tel: (81)75-344-7069/Fax: (81)75-344-7107

Printed in Japan
1103-?M (1103)(?)