

The SER-485-IR is our premium Industrial RS-422/485 Isolated Repeater. Designed for rugged industrial environments, it is UL listed and certified for use in Class 1 Division 2 locations. Powerful Optical Isolation on both data ports protects your equipment and data from damaging ground loops and surges. Additional isolation on the power supply circuits adds a third degree of protection.

## PRODUCT FEATURES

- Supports Data Rates up to 115.2 Kbps
- Extends Signal 4,000 feet (1200 Meters)
- Wide -40 to 80°C Temperature Range
- 10 to 48 VDC Input Power Range
- 2000 V 3-Way Optical Isolation
- UL Class 1 DIV 2 Listed
- Built-in, Switchable Termination & Bias

## PRODUCT OVERVIEW

Packaged in a rugged ABS plastic case, this repeater operates in wide temperature extremes. With a 35mm DIN rail mounting bracket, the SER-485-IR is easy to integrate into your control panel or other industrial equipment.

Installation and configuration is easy with DIP switches to set up baud rate and serial communications mode. Removable terminal blocks make wiring a snap. Power is connected through separate terminal block that accepts 10 to 48 VDC from any external source.

## Specifications

### Serial Technology

RS-422	TD, RD, GND
RS-485 4-Wire	TDA(-), TD(B+), RDA(-), RDB(+)
RS-485 2-Wire	Data A(-), Data B(+)
Serial Connector	5 Position, Removable Terminal Block
Data Rate	2.4 to 115.2 kbps
Isolation	2KV RMS, 1 minute
Surge Protection	600 W Peak Power Dissipation Clamping time < 1 pico-second
Industrial Bus	MODBUS ASCII/RTU
Bias	Built-in, Switchable, 1.2KΩ XMT/RCV
Termination	Built-in, Switchable, 120Ω



### Power

Source	External
Power Connector	2 Position Removable Terminal Block
Input Voltage	10 to 48 VDC (56 VDC max)
Power Consumption	0.5 W (Typical), 1.3 W (termination on both sides)
Power Supply Part #	NTPS 24-1.3

### Terminal Blocks

Wire Size Accepted	28 to 12 AWG
Pitch	5.08 mm
Insulation Resistance	≥ 500 MΩ @ 500 VDC
Maximum Torque	5 Kg / cm

### Indicators


Power	Red LED
Data	Red LED For Each Data Port

### Mechanical

Dimensions	4.9 x 4.5 x 1.3 in (12.3 x 11.3 x 3.2 cm)
Enclosure	IP 20 Plastic, 35 mm DIN Mount
Weight	0.49 lbs (222 g)
MTBF	114696 hours
MTBF Calc. Method	Parts Count Reliability Prediction

### Environmental

Op Temperature	- 40 to 80°C (-40 to 176°F)
Storage Temp	- 40 to 85°C (-40 to 185°F)
Op Humidity	0 to 95% Non-condensing
Regulatory Approvals	FCC, CE, UL UL Class 1 DIV 2 Groups A, B, C, D

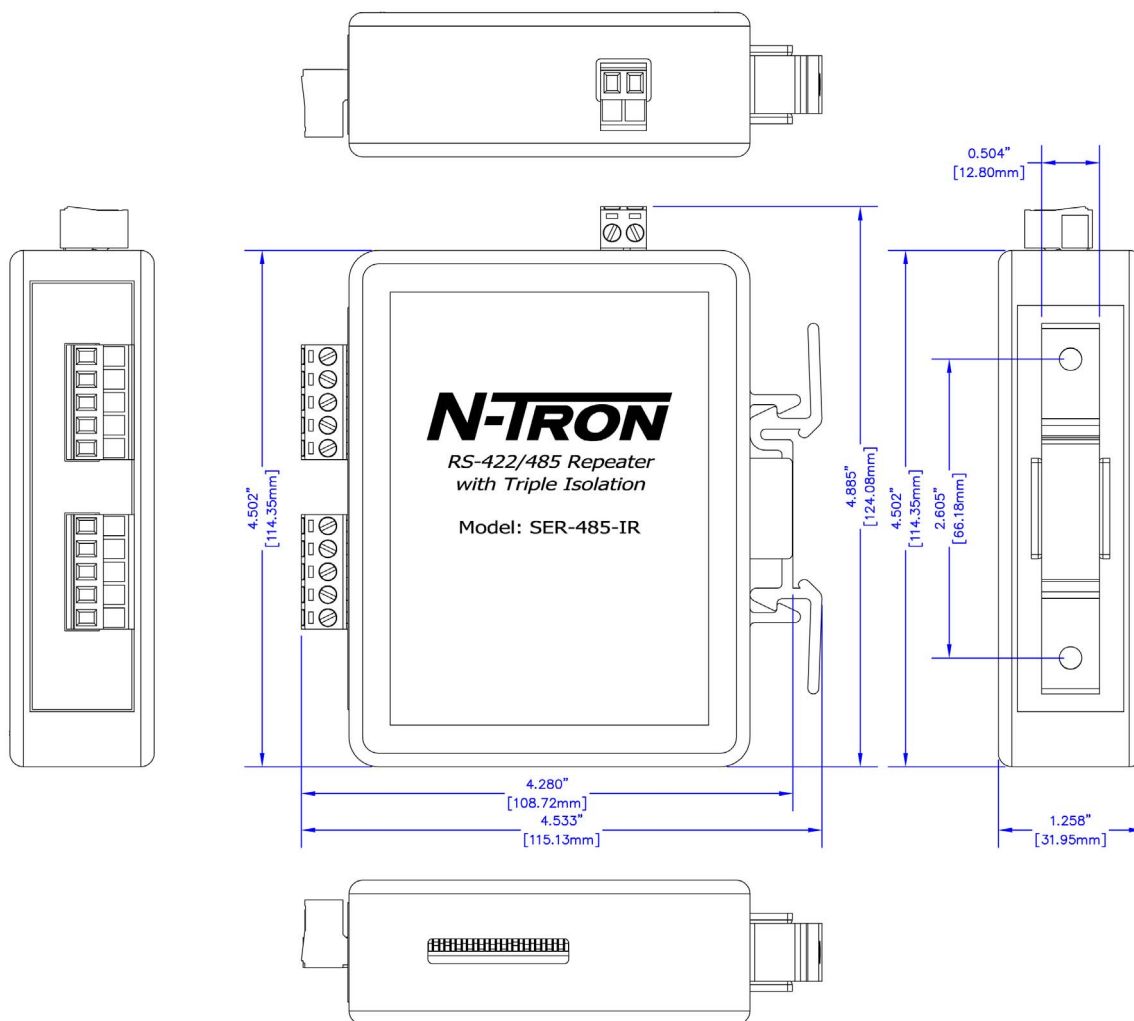

N-TRON USA & Corporate Headquarters  
3101 International Blvd. Building 6  
Mobile, AL 36606 • USA  
Phone +1-251-342-2164  
Fax +1-251-342-6353  
[www.n-tron.com](http://www.n-tron.com)

please visit us worldwide at [www.n-tron.com](http://www.n-tron.com)

© 2012 N-Tron Corporation. N-Tron and the N-Tron logo are trademarks of N-Tron Corporation. Product names mentioned herein are for identification purposes only and may be trademarks and/or registered trademarks of their respective company. Specifications subject to change without notice. The responsibility for the use and application of N-Tron products rests with the end user. N-Tron makes no warranties as to the fitness or suitability of any N-Tron product for any specific application. N-Tron Corporation shall not be liable for any damage resulting from the installation, use, or misuse of this product. Printed in USA. REV 2012.11.13