

XW2B Flat-cable Connector Type with M3.5 Screw Terminals

Ordering Information



No. of contacts	Model
20	XW2B-20G5
34	XW2B-34G5
40	XW2B-40G5
50	XW2B-50G5

Model	Connector			
	Flat-cable connector MIL-type socket		Discrete-wire IDC connector 2-row socket	
	Connector	Strain relief	Connector (See note 1)	Semi-cover (See note 2)
XW2B-20G5	XG4M-2030	XG4T-2004	XG5M-2032-N XG5M-2035-N	XG5S-1001
XW2B-34G5	XG4M-3430	XG4T-3404	XG5M-3432-N XG5M-3435-N	XG5S-1701
XW2B-40G5	XG4M-4030	XG4T-4004	XG5M-4032-N XG5M-4035-N	XG5S-2001
XW2B-50G5	XG4M-5030	XG4T-5004	XG5M-5032-N XG5M-5035-N	XG5S-2501


- Note:** 1. Either the XG5M-□□32-N or the XG5M-□□35-N may be used.
 2. Each connector requires two semi-covers.

Dimensions

XW2B-□□G5

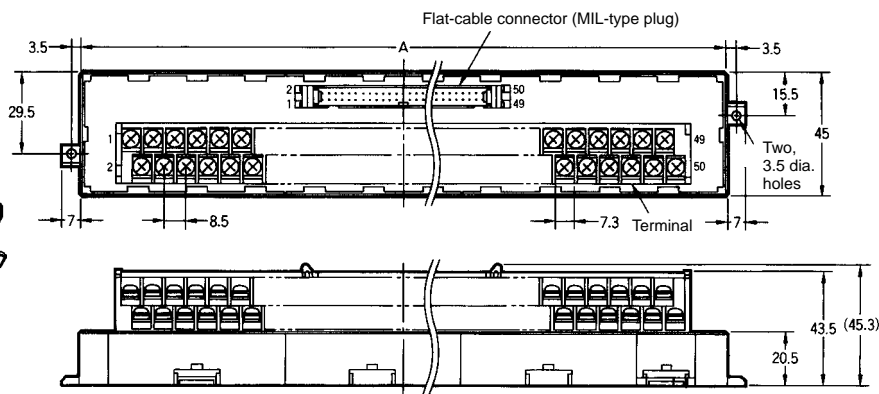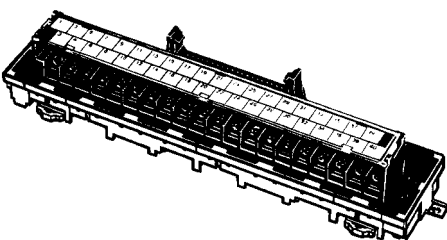

Connection Diagram

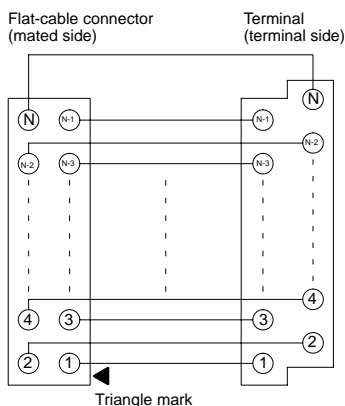

Model	No. of contacts	Length of A	Connector (See note)
XW2B-20G5	20	112.5	XG4A-2031
XW2B-34G5	34	180.0	XG4A-3431
XW2B-40G5	40	202.5	XG4A-4031
XW2B-50G5	50	247.5	XG4A-5031

- Note:** 1. The flat-cable connector has one polarity slot.
 2. The contact pitch of the terminals is 8.5 mm.