

JOB BR


Working under a different light



A working day can put a strain on your eyesight if you do not have efficient lighting. The JOB-BR lamp was created from the need to fit workbenches with constant, flicker-free lighting with excellent colour rendering, which is perfect for use in industrial environments. The lamp features a robust structure and a movable arm that can be positioned as desired.

Resistant, practical and available with a dimmer, this lamp guarantees an energy saving of 50% compared with traditional lighting.

- Articulated movable arm
- Flicker-free, anti-glare uniform lighting
- Light source with 60,000 hours of average life
- 50% energy saving

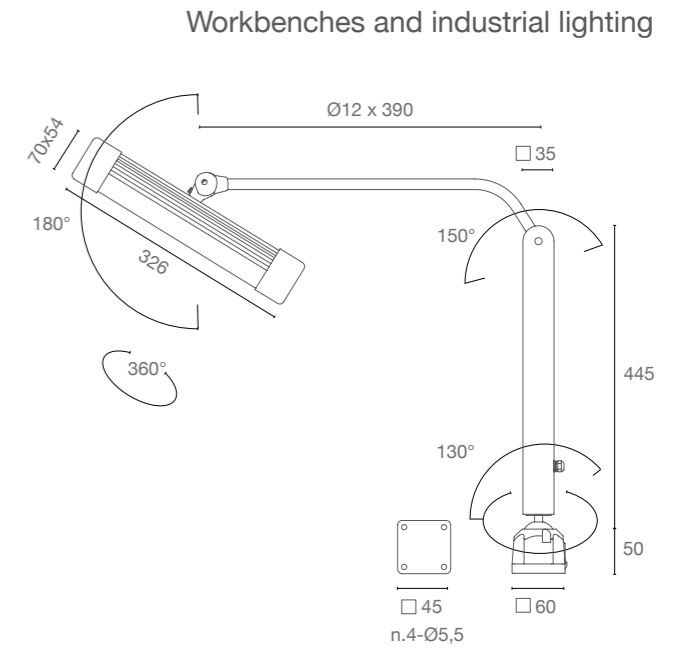

All values in mm.


TECHNICAL FEATURES


	JOB BR
Power supply	230 V or 24Vdc
Power	13 W
Current	0,6 A
Degree of protection	IP40 (IP65 spot)
LED type	mini Power LED
LED lifespan	50.000 h
Lumen LED	1400 lum - 120°
Light color	5000 K - CRI75
Structure	anodized aluminium and polycarbonate
Switch	on-off switch on the spot
Fastenings	CLAMP04 or B02
Cable	PVC with Schuko plug (230 V) neoprene (24 Vdc)

ORDER CODES

JOBBR.24	13 W - 24 Vdc	JOBBR.230	13 W - 230 V	JOBBR.DIM	13 W - 230 V dimmer
----------	---------------	-----------	--------------	-----------	---------------------

LUMINANCE DIAGRAMS

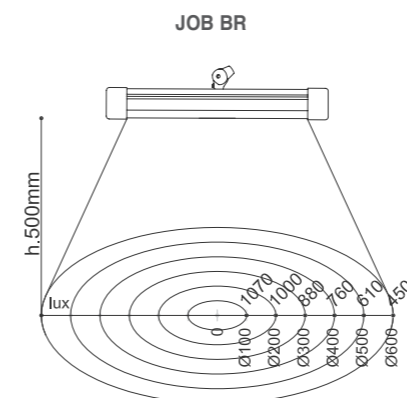

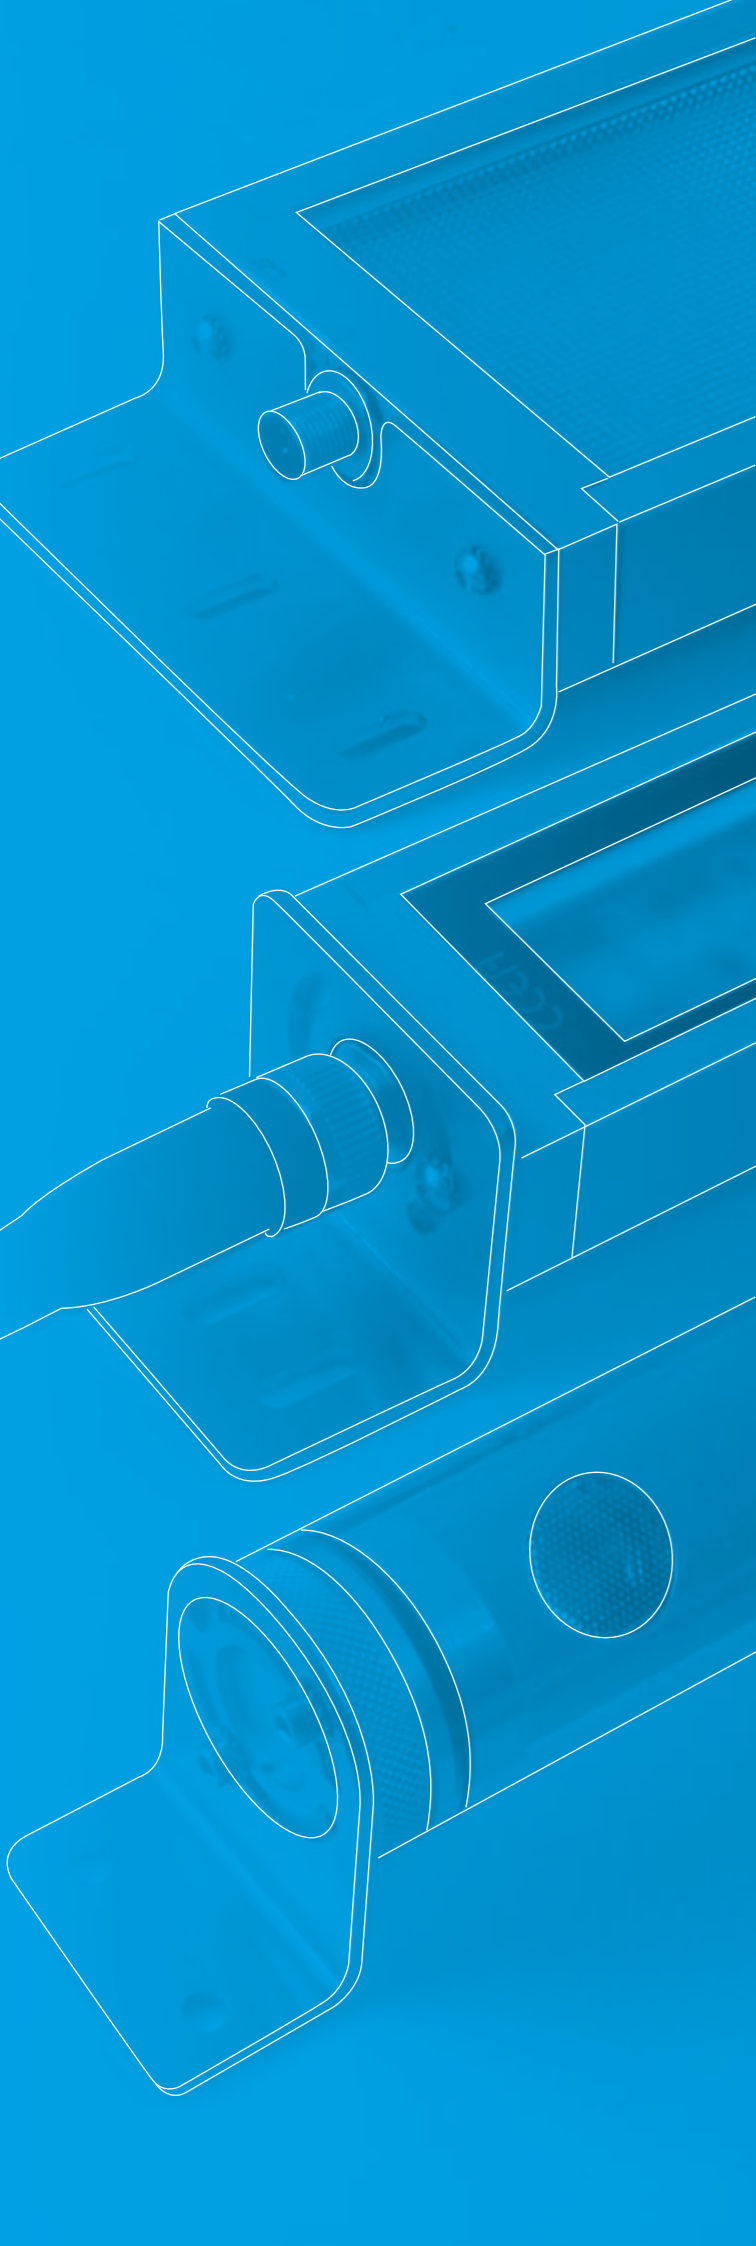

Accessories

- Fastenings
- Power supply units
- Cables and connectors

Fastenings

Accessories



Magnetic base
for lamps with an ABS base

Cod. B01



Magnetic base
for lamps with an aluminium base

Cod. B02



Fastening clamp
for lamps with an ABS base

Cod. CLAMP.03



Fastening clamp
for lamps with an aluminium base

Cod. CLAMP.04



Stainless steel fastening clips
for the T-LED series

Cod. CLIP.36



Stainless steel fastening plates
for the HERIO series

Cod. HERIO.FX01



Fastening accessories for the JOB series

Cod. JOB.FX01



Adjustable stainless steel fastening plates for the T-CITY/T-LED series

Cod. T.FX01



Adjustable stainless steel fastening plates for the TABIT series

Cod. TABIT.FX02



Adjustable stainless steel fastening plates for the TRACK series

Cod. TRACK.FX04

Power supply units



AC/DC power supply unit
110/230V-24Vdc - 60W

Cod. A0361005060922D



AC/DC power supply unit
110/230V-24Vdc - 100W

Cod. A0371005061023D



M12 female movable connector 4P with 1.5 m cable

Cod. M12V.F.C1,5



M12 female movable connector 4P with 3 m cable

Cod. M12V.F.C3



M12 female movable connector 4P with 5 m cable

Cod. M12V.F.C5

M12 female movable connector 4P with 10 m cable













Cod. M12V.F.C10



M12 female movable connector

Cod. N10610001040302

Symbol key

	Lamp designed for use on automatic machine tools: CNC and EDM.		High energy saving technology.
	Lamp designed for use on manual machine tools: milling tools, lathes and drills.		Device equipped with a circuit with an integrated 24Vdc LED driver (Integrated Driver System).
	Lamp designed for use inside spray booths.		Concentrated beam.
	Lamp designed for use on workbenches and as industrial lighting.		Diffused beam.
	Lamp designed for use inside food processing and bottling machines.		LED technology device.
	Lamp designed for quality control and precision lighting.		Variable cable length.
			Degree of protection in accordance with standard EN-60529.
			Product complies with European Regulations (2004/08/EC - 2006/95/EC) for EC labelling - 2000/55/EC - 2008/35/EC.



The information and photographs shown in this catalogue are purely indicative, C.C.E.A. reserves the right to make technical or structural changes at any time to improve the quality of its products.

Edition: January 2015