



LED lamp 6W made up of aluminum and ABS illuminator, single power LED 6W sources, chromium plated short metal arm, aluminum swivel adjustment and fixing, unipolar switch, external LED driver.
Power supply: 230V 50/60Hz.

Power LED exempt from photobiological risk



Applications: particularly suitable for the lightning of sewing amachines.

ELECTRICAL FEATURES


Power supply	230 Vac
LED operating voltage	9,3 Vdc
LED operating current	500 mA
Power	6 W
IEC class	I
LED driver	External art. A16500TC dim. 115x34x19mm IP20
Degree of protection	IP20

OPTICAL AND MECHANICAL FEATURES

LED type	CITILED CL-L251
N°. LED	1
Brightness	625 lm 120°
Light color	5000 K
LED lifetime	50 000 Std.
Fastening	Aluminum swivel adjustment with M8 screws
Switch	Unipolar ON-OFF
Color	Black - RAL9002

ORDER CODES

Code	
P496RTR.01	6W - 230V 50/60HZ - Nero
P496RTR.02	6W - 230V 50/60HZ - RAL9002

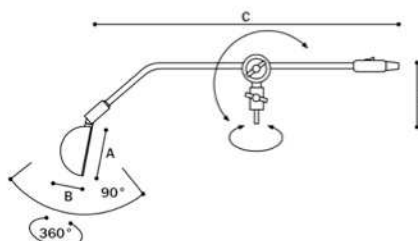

Dimensions

A -	Ø86mm
B -	50mm
C -	380mm
D -	70mm