

MICO BASIC 5.2/3.6

8 channels
MICO BASIC 5.2/3.6
Current adjustment 2 A
Current adjustment 6 A

Image

- Fire protection (EN 60950-1)
- Operating voltage protection (EN 61131-2)
- Operating condition capacity (EN 61131-1)

Vicarious picture

Approvals**Technical Data**

Operating voltage	24 V DC
Operating voltage range	18...30 V DC
Number of channels	8 channels
Current adjustment	5 × 2 A ; 3 × 6 A
Inrush capacity	max. 20 mF (per channel)
Group alarm output	max. 20 mA; high: all channels ON; low: not all channels ON
Remote restart (ON)	10...30 V DC
Impulse length	min. 20 ms

General data


Connection	Spring clamp terminals
Input terminals	1 × 16 mm ²
Output terminals	per output 1 × 4 mm ²
Alarm terminals	2.5 mm ²
Bridging concept	one side, with spring clamp terminals or bridge set (max. 40 A)
Mounting method	DIN-rail mountable TH35 (EN 60715)
Temperature range	0...+55 °C (storage temperature -40...+80 °C)

All data on this data sheet was compiled carefully.

Liability regarding correctness, completeness, and actuality is limited to gross negligence. Created: 12/12

Murrelektronik GmbH | Falkenstraße 3, D-71570 Oppenweiler | Fon +49 7191 470, Fax +49 7191 47-130 | info@murrelektronik.com | www.murrelektronik.com

Circuit diagram

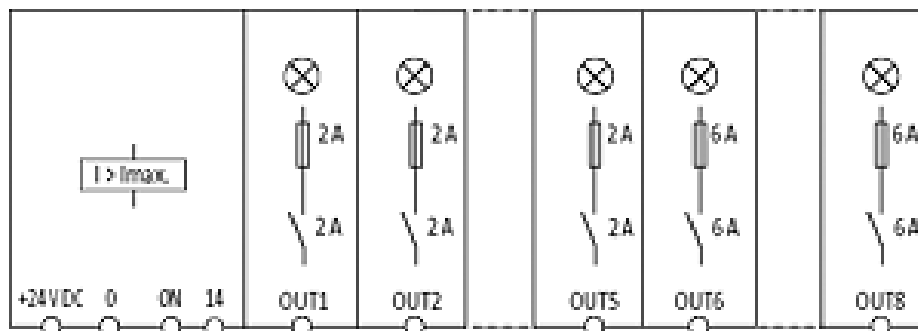

Dimension drawing

