

OMRON

E5_C TEMPERATURE CONTROLLER

High performance with simplicity



- » Easy set-up and operation
- » High-contrast display
- » DIN-Track mounting type joined the lineup

realizing

The new standard in temperature control...


Omron has been an active innovator in temperature control since introducing its first temperature controller in 1967. Now temperature control has taken a giant leap forward with Omron's next generation of controllers – the E5_C, which set new global standards in the crucial areas of precision, user friendliness and control performance. The E5_C series will save you time and effort in set-up and operation, while enabling faster and more accurate monitoring/control of your process. The high-visibility display of the new series is also extremely easy to read and virtually eliminates any possibility for human error.

Key features

- High-contrast, white LCD display visible from large distances and from any angle
- Easy to set up, and operate intuitively via CX-Thermo without power supply
- 50 ms sampling period for fast and precise regulation
- Functions for diagnosis for secure operations (see note 1)
- Useful timer and logic operation functions eliminating the need of a PLC



Note 1: Alarm for loop break or PV change rate, heater burnout or sensor burnout detection

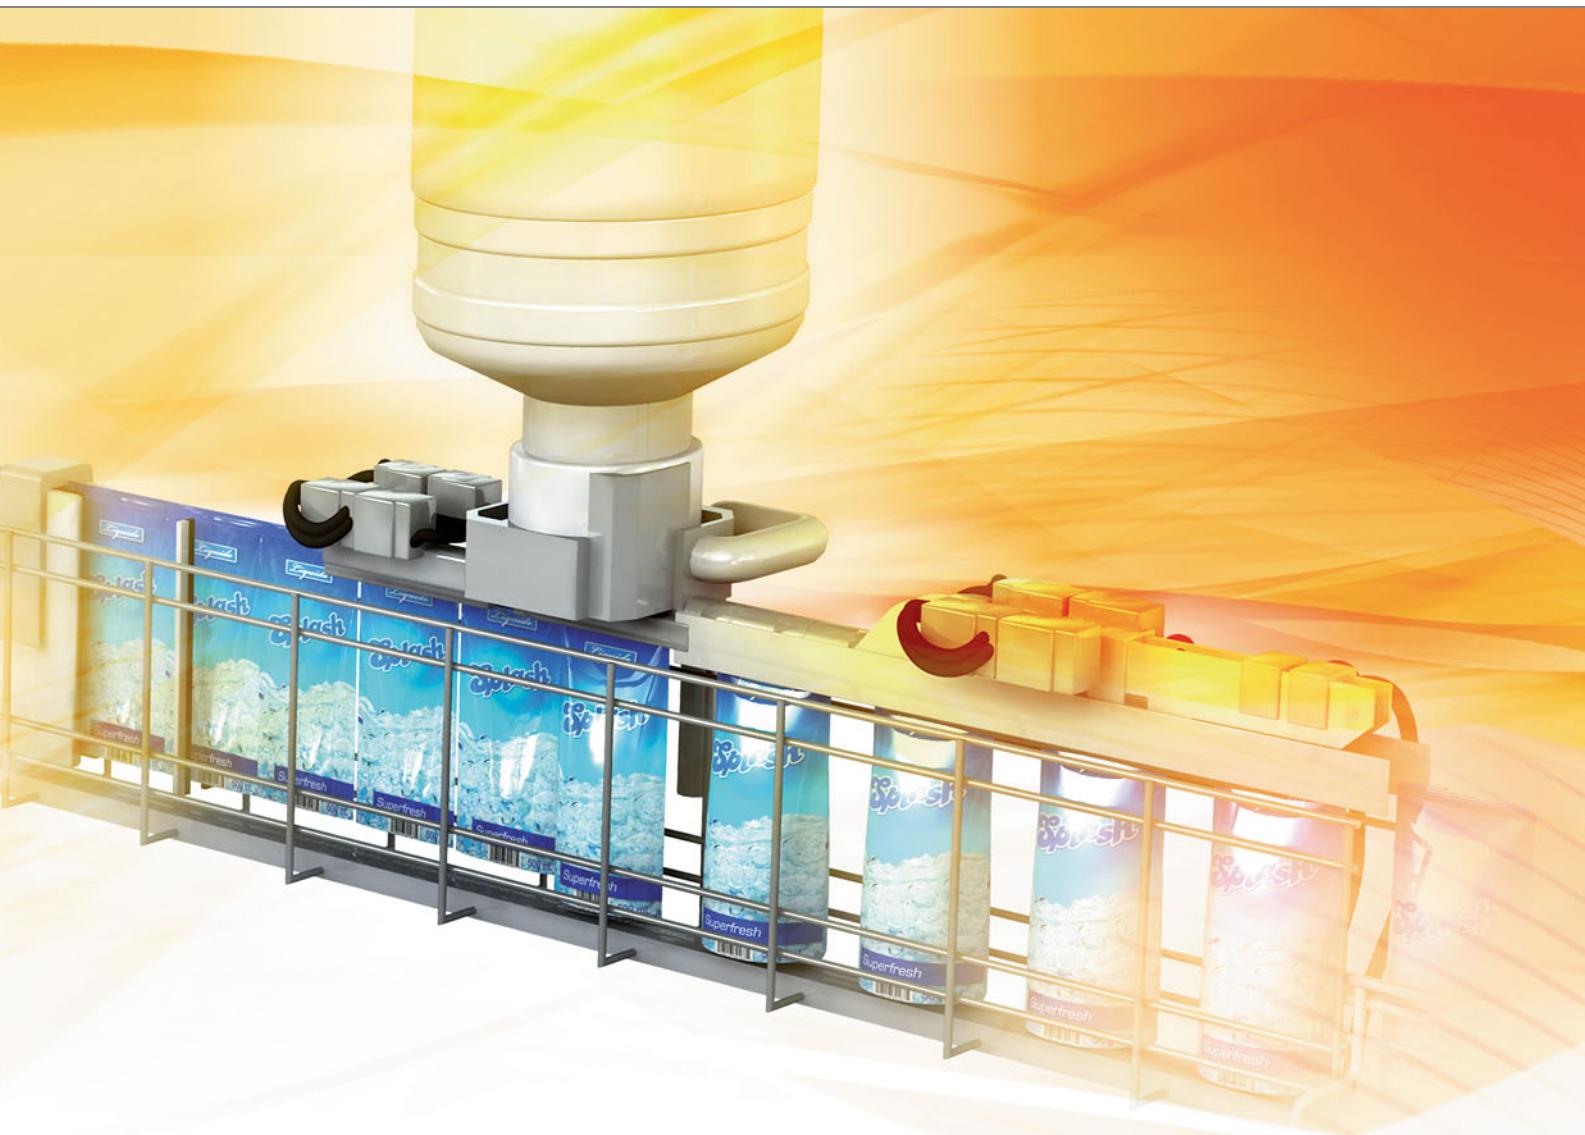

...is higher in every respect

Clearer LCD display

The large, high-contrast, white LCD display contributes to the exceptional clarity and therefore readability of the E5_C series. The display can be read unambiguously from greater distances and from much wider viewing angles than normal.

Easy set-up and operation

Coupled with the autotuning algorithms, which greatly reduce set-up and commissioning time, Omron's CX-Thermo support software has been specially developed for use with the E5_C series. This enables faster parameter set-up, easier device adjustment and simpler maintenance.

Unique performance

Although intrinsic high sampling speed and high precision are built into the E5_C series, Omron's 2-PID control is a key factor behind the advantage it offers over standard controllers. Using a powerful algorithm, it makes all the difference to control stability and thus the quality of your products.

High-contrast display

White LCD offers the greatest contrast to the black instrumentation backgrounds found in panels and the lighting conditions found in most control rooms. Despite the compact dimensions of the E5_C series, the use of white LCD technology means that the 15-25 mm display height gives maximum clarity for its size. The distance and viewing angle of the high-contrast, white LCD light display is also far less critical for viewers, ensuring correct readings every time.*

* Excluding E5DC



The white LCD display is easy to read in the subdued lighting conditions found in most control rooms.



The display remains easy to read even from wide viewing angles.



Save space!

The compact and space-saving design of the new E5_C controller generation requires less panel depth (60 mm), allowing quick snap-mounting and easy installation even under very cramped conditions.

Thanks to the IP66 protection of the front cover, the E5_C can withstand humid environments and also be cleaned with non-aggressive fluids.*

* Excluding E5DC

Easy to connect, set-up and operate

The E5_C series is extremely easy to connect, set-up and operate in just a few simple steps using the instrument's five front keys. Omron's CX-Thermo software and new navigation assistant for intuitive settings offers the fastest possible parameter setting, easier device adjustment and simpler maintenance.

Ready to operate in only three steps:

1

Connect – no extra wiring necessary*

2

Navigate and set-up

3

Operate



Time-saving 'shift key' for changing the set value

Key assignment can be changed for RUN/STOP or AT execution/STOP according to the user's setting!



Five front keys



Units digit setting

Push the shift key




Tens digit setting

The New E5DC with DIN-Track Mounting Capability Joins the E5_C Series, Next-generation Temperature Controllers. The E5DC Inherits the Features of the E5_C Series.

- Provides the unified design, operability, and functions of the E5_C Series.
- Setup Tool Port on the front panel.
- Width of 22.5 mm and mounts to DIN Track.
- On-panel mounting is also possible. (Mounting Adapter required; sold separately.)



Removable Terminal Block for Easy Mounting and Replacement.

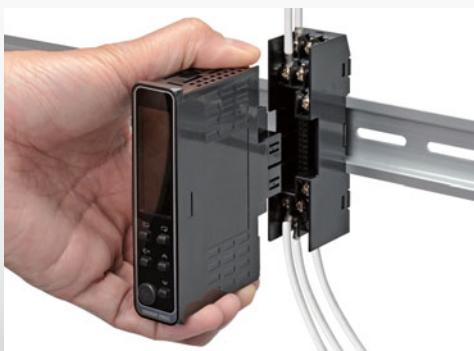

Removing from the Terminal Block
The image is for illustration purpose only.

* Hooks must be pressed to remove from the terminal block.




Even Though the E5DC Mounts to DIN Track, the Same Displays and Same Settings as the Rest of the E5_C Series Make It Just as Easy to Use


You can make the following settings with the front-panel display and keys on the E5DC to reduce the workload:

- Settings during machine commissioning
- Easy confirmation of display:settings /process temperature when designing or evaluating machines
- Confirmation of settings when troubleshooting

< Previous In-panel Temperature Controllers >

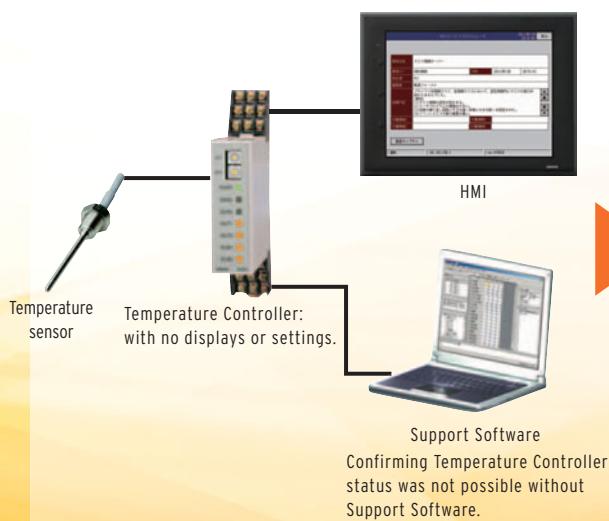

< E5DC >

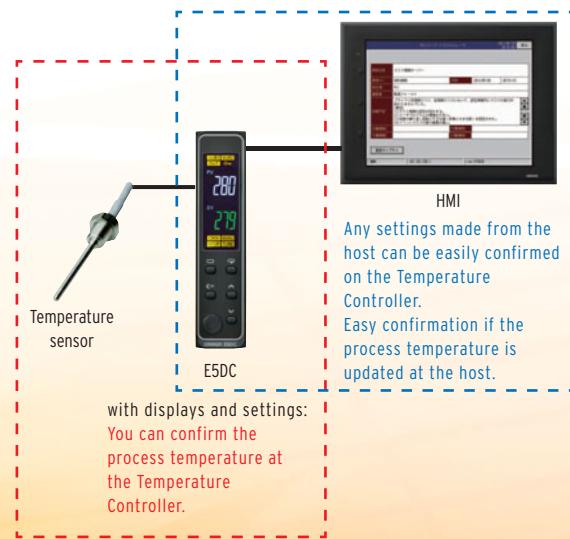

Contributes to Machine Downsizing

The E5DC is only 22.5 mm wide and enables to install multi channel controls in limited space.

The E5DC has a short body of only 85 mm in depth for easy mounting in control panels with 120-mm depths.

Previously
▼
E5DC
Requires
only half
the space.



120 mm
107 mm
Previous Temperature Controller
85 mm
Previously
▼
E5DC
Requires
only 85 mm
of depth.

Unique performance with simplicity...

...and more control functionality


With key features like simplicity in operation, Omron's patented PID control, 50ms sampling period and the ability to handle multi-functional input and output types, the E5_C sets a new standard in fast and precise temperature regulation. It has all the familiar functionality available from existing Omron temperature controllers to cover virtually any general-purpose demand. And naturally, the versatile E5_C series is available with input/output combinations to perfectly match all of your requirements.

Extended inputs & outputs

- Remote SP input
- Transfer output
(voltage 1-5 V output) added
- Event input
- Auxiliary output

New feature

- Program-less communication
- Position-proportional control

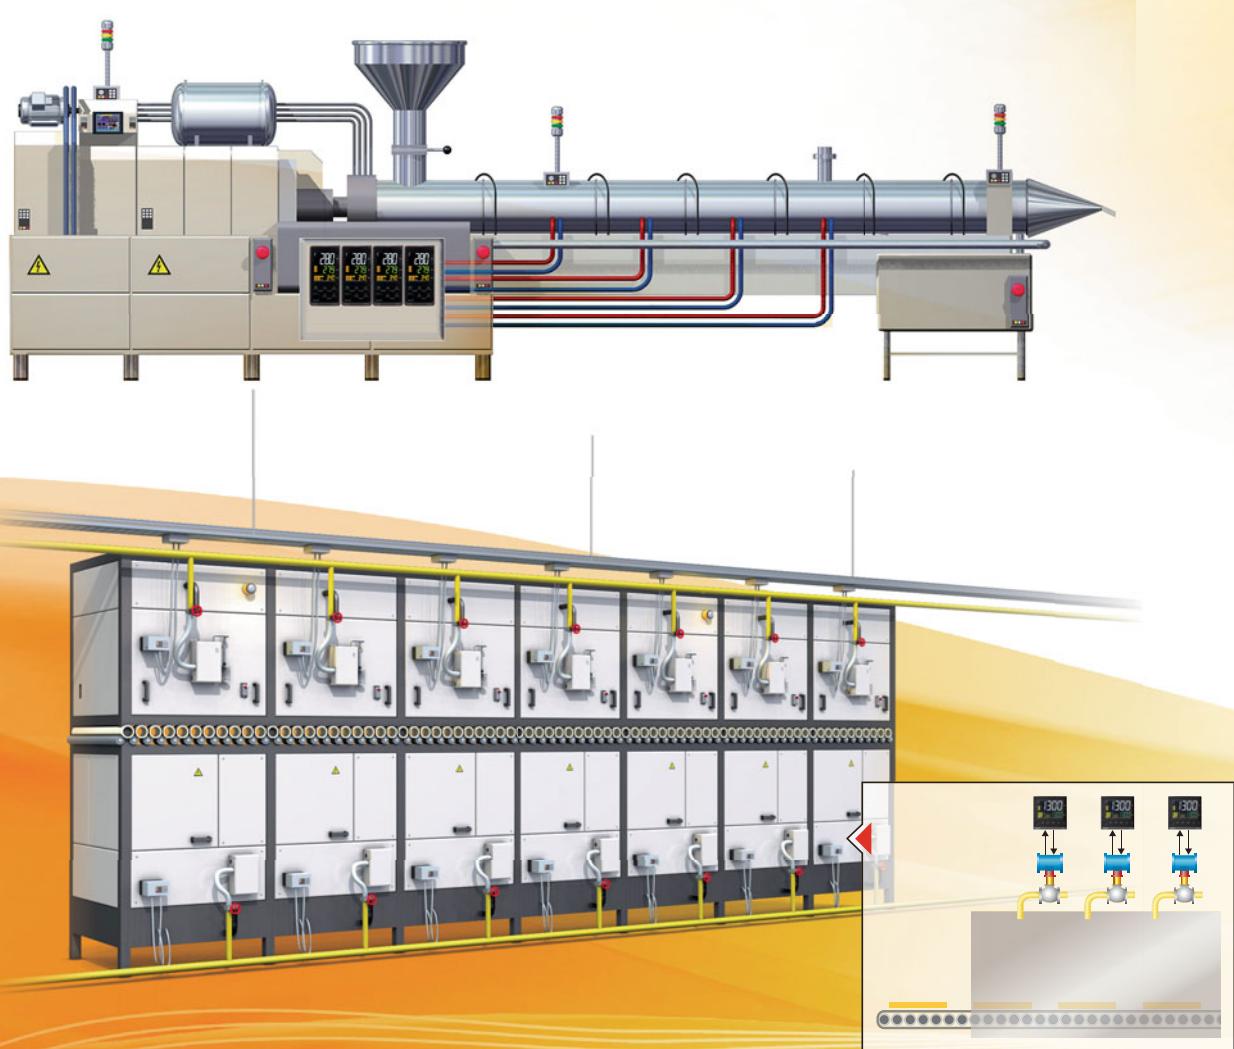



Global availability, support and network

Providing you with the support you need to operate globally

Whether you want to take your existing products into new industrial sectors, or whether you want to expand your business into entirely new geographical markets, Omron can help. We aim to offer the same level of support globally, without forgetting local needs.

We have production facilities on every continent.

Our smart communications network and seamless global support means we can provide you with parts and technical support wherever you sell your machines. And all of our components comply with major international standards, to ensure problem-free integration. It's all there for you.

Facts and figures

- Over 35,000 employees
- Almost 200 locations
- Presence in every continent
- Knowledge-sharing through our global infrastructure
- Local R&D facilities synchronised to local needs
- Local factories to ensure quick response
- Global pricing terms
- Global support

E5CC model list (all models 3 auxiliary outputs)

Output	Option No.*	Order code AC100-240V	Order code AC/DC24V
Out 1: Relay Out 2: non	001 003 005 006 007	E5CC-RX3A5M-000 E5CC-RX3A5M-001 E5CC-RX3A5M-003 E5CC-RX3A5M-005 E5CC-RX3A5M-006 E5CC-RX3A5M-007	E5CC-RX3D5M-000 E5CC-RX3D5M-001 E5CC-RX3D5M-003 E5CC-RX3D5M-005 E5CC-RX3D5M-006 E5CC-RX3D5M-007
Out 1: Voltage (pulse) Out 2: non	001 003 005 006 007	E5CC-QX3A5M-000 E5CC-QX3A5M-001 E5CC-QX3A5M-003 E5CC-QX3A5M-005 E5CC-QX3A5M-006 E5CC-QX3A5M-007	E5CC-QX3D5M-000 E5CC-QX3D5M-001 E5CC-QX3D5M-003 E5CC-QX3D5M-005 E5CC-QX3D5M-006 E5CC-QX3D5M-007
Out 1: Voltage (pulse) Out 2: Voltage (pulse)	001 003 005 006 007	E5CC-QQ3A5M-000 E5CC-QQ3A5M-001 E5CC-QQ3A5M-003 E5CC-QQ3A5M-005 E5CC-QQ3A5M-006 E5CC-QQ3A5M-007	E5CC-QQ3D5M-000 E5CC-QQ3D5M-001 E5CC-QQ3D5M-003 E5CC-QQ3D5M-005 E5CC-QQ3D5M-006 E5CC-QQ3D5M-007
Out 1: Linear current Out 2: non	004 005 006 007	E5CC-CX3A5M-000 E5CC-CX3A5M-004 E5CC-CX3A5M-005 E5CC-CX3A5M-006 E5CC-CX3A5M-007	E5CC-CX3D5M-000 E5CC-CX3D5M-004 E5CC-CX3D5M-005 E5CC-CX3D5M-006 E5CC-CX3D5M-007
Out 1: Linear current Out 2: Voltage (pulse)	001 003 005 006 007	E5CC-CQ3A5M-000 E5CC-CQ3A5M-001 E5CC-CQ3A5M-003 E5CC-CQ3A5M-005 E5CC-CQ3A5M-006 E5CC-CQ3A5M-007	E5CC-CQ3D5M-000 E5CC-CQ3D5M-001 E5CC-CQ3D5M-003 E5CC-CQ3D5M-005 E5CC-CQ3D5M-006 E5CC-CQ3D5M-007

As well as these models other models are available on request. Please contact the local sales office for special requests.

* Option No.:

001

Event Input 2,
Heater Burnout SSR
defect detection

003

Communication
3-phase heater
alarm

004

Event Input 2,
Communication

005

Event Input 4

006

Event Input 2,
Transfer output

E5EC/E5AC Model list (all models 4 auxiliary outputs)

Output	Option No.*	Order code AC100-240V	Order code AC/DC24V
Out 1: Relay Out 2: non	009 010 011	E5_C-RX4A5M-000 E5_C-RX4A5M-009 E5_C-RX4A5M-010 E5_C-RX4A5M-011	E5_C-RX4D5M-000 E5_C-RX4D5M-009 E5_C-RX4D5M-010 E5_C-RX4D5M-011
Out 1: Voltage (pulse) Out 2: non	009 010 011	E5_C-QX4A5M-000 E5_C-QX4A5M-009 E5_C-QX4A5M-010 E5_C-QX4A5M-011	E5_C-QX4D5M-000 E5_C-QX4D5M-009 E5_C-QX4D5M-010 E5_C-QX4D5M-011
Out 1: Relay Out 2: Relay	009 010 011	E5_C-RR4A5M-000 E5_C-RR4A5M-009 E5_C-RR4A5M-010 E5_C-RR4A5M-011	E5_C-RR4D5M-000 E5_C-RR4D5M-009 E5_C-RR4D5M-010 E5_C-RR4D5M-011
Out 1: Voltage (pulse) Out 2: Voltage (pulse)	009 010 011	E5_C-QQ4A5M-000 E5_C-QQ4A5M-009 E5_C-QQ4A5M-010 E5_C-QQ4A5M-011	E5_C-QQ4D5M-000 E5_C-QQ4D5M-009 E5_C-QQ4D5M-010 E5_C-QQ4D5M-011
Out 1: Voltage (pulse) Out 2: Relay	009 010 011	E5_C-QR4A5M-000 E5_C-QR4A5M-009 E5_C-QR4A5M-010 E5_C-QR4A5M-011	E5_C-QR4D5M-000 E5_C-QR4D5M-009 E5_C-QR4D5M-010 E5_C-QR4D5M-011
Out 1: Linear current Out 2: non	004 005 013 014	E5_C-CX4A5M-000 E5_C-CX4A5M-004 E5_C-CX4A5M-005 E5_C-CX4A5M-013 E5_C-CX4A5M-014	E5_C-CX4D5M-000 E5_C-CX4D5M-004 E5_C-CX4D5M-005 E5_C-CX4D5M-013 E5_C-CX4D5M-014
Out 1: Linear current Out 2: Linear current	004 005 013 014	E5_C-CC4A5M-000 E5_C-CC4A5M-004 E5_C-CC4A5M-005 E5_C-CC4A5M-013 E5_C-CC4A5M-014	E5_C-CC4D5M-000 E5_C-CC4D5M-004 E5_C-CC4D5M-005 E5_C-CC4D5M-013 E5_C-CC4D5M-014
Out 1: Linear current Out 2: Voltage (pulse)	009 010 011	E5_C-CQ4A5M-000 E5_C-CQ4A5M-009 E5_C-CQ4A5M-010 E5_C-CQ4A5M-011	E5_C-CQ4D5M-000 E5_C-CQ4D5M-009 E5_C-CQ4D5M-010 E5_C-CQ4D5M-011
Out 1: Relay* Out 2: Relay*	004 014	E5_C-PR4A5M-000 E5_C-PR4A5M-004 E5_C-PR4A5M-014	E5_C-PR4D5M-000 E5_C-PR4D5M-004 E5_C-PR4D5M-014

* Position proportional control model

007 Event Input 2, Remote SP	009 Event Input 2, Communication 3-phase heater alarm	010 Event Input 4 Heater Burnout SSR defect detection	011 Event Input 6, Remote SP Heater Burnout SSR defect detection, Transfer output	013 Event Input 6, Remote SP, Transfer output	014 Event Input 4, Communication Remote SP, Transfer output
---	--	---	---	---	--

E5DC model list (models 0 or 2 auxiliary outputs)

Output	Option No.* ¹	Order code AC100-240V	Order code AC/DC24V
Out 1: Relay	002	E5DC-RX2ASM-000	E5DC-RX2DSM-000
	015	E5DC-RX2ASM-002	E5DC-RX2DSM-002
	017	E5DC-RX0ASM-015* ²	E5DC-RX0DSM-015* ²
Out 1: Voltage (pulse)	002	E5DC-QX2ASM-000	E5DC-QX2DSM-000
	015	E5DC-QX2ASM-002	E5DC-QX2DSM-002
	017	E5DC-QX0ASM-015* ²	E5DC-QX0DSM-015* ²
Out 1: Linear current	002	E5DC-CX2ASM-000	E5DC-CX2DSM-000
	015	E5DC-CX0ASM-015* ²	E5DC-CX0DSM-015* ²
	015	E5DC-CX2ASM-015	E5DC-CX2DSM-015
	016	E5DC-CX2ASM-016	E5DC-CX2DSM-016

*¹ Option No.:

002

Communication,
Heater Burnout SSR
defect detection

015

Communication

016

Event Input 1

017

Event Input 1,
Heater Burnout SSR
defect detection

*² Auxiliary outputs are not possible for these models.



High performance & simplicity

The next generation E5_C temperature controller is setting a new global standard in terms of precision and user-friendly design. Best control performance, easy set-up and outstanding visibility of the white IP66 LCD display have been integrated into a space-saving housing with only 60 mm of depth.

- Fast and precise regulation: 50ms sampling loop period time
- Easy to set up, and operate intuitively via CX-Thermo without power supply
- Best contrast display using white LCD technology which is visible from a far distance and from any angle
- Useful alarm and diagnosis functions for secure operation

Specifications

	E5CC	E5EC	E5AC
Power supply voltage	A in model number: 100 to 240 VAC, 50/60 Hz D in model number: 24 VAC, 50/60 Hz; 24 VDC		
Operating voltage range	85% to 110% of rated supply voltage		
Power consumption	6.5 VA max. at 100 to 240 VAC, and 4.1 VA max. at 24 VAC or 2.3 W max. at 24 VDC	8.3 VA max. at 100 to 240 VAC, and 5.5 VA max. at 24 VAC or 3.2 W max. at 24 VDC	9.0 VA max. at 100 to 240 VAC, and 5.6 VA max. at 24 VAC or 3.4 W max. at 24 VDC
Sensor input	<ul style="list-style-type: none"> - Temperature input Thermocouple: K, J, T, E, L, U, N, R, S, B, W, or PL II Platinum resistance thermometer: Pt100 or JPt100 Infrared temperature sensor (ES1B): 10 to 70°C, 60 to 120°C, 115 to 165°C, or 140 to 260°C - Analog input Current input (mA): 4 to 20 or 0 to 20 Voltage input (V): 1 to 5, 0 to 5, or 0 to 10 		
Input impedance	Current input: 150 Ω max., Voltage input: 1 Ω M min. (Use a 1:1 connection when connecting the ES2-HB/THB.)		
Control method	ON/OFF control or 2-PID control (with auto-tuning)		
Indication accuracy	Thermocouple input: ($\pm 0.3\%$ of PV or $\pm 1^\circ\text{C}$, whichever is greater) ± 1 digit max. Platinum resistance thermometer input: ($\pm 0.2\%$ of PV or $\pm 0.8^\circ\text{C}$, whichever is greater) ± 1 digit max. Analog input: $\pm 0.2\%$ FS ± 1 digit max. CT input: $\pm 5\%$ FS ± 1 digit max.	Thermocouple input: ($\pm 0.3\%$ of PV or $\pm 1^\circ\text{C}$, whichever is greater) ± 1 digit max. Platinum resistance thermometer input: ($\pm 0.2\%$ of PV or $\pm 0.8^\circ\text{C}$, whichever is greater) ± 1 digit max. Analog input: $\pm 0.2\%$ FS ± 1 digit max. CT input: $\pm 5\%$ FS ± 1 digit max.	
Auto-Tuning	Yes, 40%/100% MV output limit selection. When using Heat/Cool: Automatic cool gain adjustment		
Self-Tuning	Yes		
Control outputs	Relay output	SPST-NO, 250 VAC, 3 A (resistive load), electrical life: 100,000 operations, minimum applicable load: 5 V, 10 mA	SPST-NO, 250 VAC, 5 A (resistive load), electrical life: 100,000 operations, minimum applicable load: 5 V, 10 mA
	Voltage output (for driving SSR)	Output voltage: 12 VDC $\pm 20\%$ (PNP), max. load current: 21 mA, with short-circuit protection circuit (The maximum load current is 21 mA for models with two control outputs.)	Output voltage: 12 VDC $\pm 20\%$ (PNP), max. load current: 40 mA, with short-circuit protection circuit (The maximum load current is 21 mA for models with two control outputs.)
	Linear current output	4 to 20 mA DC/0 to 20 mA DC, load: 500 Ω max., resolution: approx. 10,000	
Auxiliary outputs	Number of outputs	3	4
	Output specifications	SPST-NO relay outputs, 250 VAC, Models with 3 outputs: 2 A (resistive load), electrical life: 100,000 operations, minimum applicable load: 5 V, 10 mA	SPST-NO relay outputs, 250 VAC, Models with 4 outputs: 2 A (resistive load), electrical life: 100,000 operations, minimum applicable load: 5 V, 10 mA
Event inputs	Number of inputs	2 or 4 or 6 max (depends on the model)	
	External contact input specifications	Contact input: ON: 1 k Ω max., OFF: 100 k Ω min. Non-contact input: ON: Residual voltage: 1.5 V max., OFF: Leakage current: 0.1 mA max. Current flow: Approx. 7 mA per contact	
Setting method	Digital setting using front panel keys or via Remote Software CX-Thermo V4.5		
Indication method	11-segment digital display and individual indicators		
Multi SP	Up to eight set points (SPO to SPT) can be saved and selected using event inputs, key operations, or serial communications.		
Other functions	Manual output, heating/cooling control, loop burnout alarm, SP ramp, other alarm functions, heater burnout detection (including SSR failure detection), 40% AT, 100% AT, MV limiter, input digital filter, self-tuning, temperature input shift, run/stop, protection functions, extraction of square root, MV change rate limit, logic operations, PV/SV status display, simple programming, automatic cooling coefficient adjustment		
Ambient operating temperature	-10 to 55°C (with no condensation or icing)		
Ambient operating humidity	25% to 85%		
Storage temperature	-25 to 65°C (with no condensation or icing)		
Degree of protection	Front panel: IP66, Rear case: IP20, Terminals: IP00		
Sampling period	50 ms	48x48x64	96x96x64
Size in mm (HxWxD)			



High performance & DIN-Track Mounting

The next generation E5_C temperature controller is setting a new global standard in terms of precision and user-friendly design. Best control performance, easy set-up and outstanding visibility of the white LCD display have been integrated into a space-saving housing with only 22.5mm wide.

- Fast and precise regulation: 50ms sampling loop period time
- Easy to set up, and operate intuitively via CX-Thermo without power supply
- Removable terminal block for easy mounting and replacement.
- Useful alarm and diagnosis functions for secure operation

Specifications

		E5DC
Power supply voltage		A in model number: 100 to 240 VAC, 50/60 Hz D in model number: 24 VAC, 50/60 Hz; 24 VDC
Operating voltage range		85% to 110% of rated supply voltage
Power consumption		4.9 VA max. at 100 to 240 VAC, and 2.8 VA max. at 24 VDC or 1.5 W max. at 24 VDC
Sensor input		<ul style="list-style-type: none"> - Temperature input Thermocouple: K, J, T, E, L, U, N, R, S, B, W, or PL II Platinum resistance thermometer: Pt100 or JPt100 Infrared temperature sensor (ES1B): 10 to 70°C, 60 to 120°C, 115 to 165°C, or 140 to 260°C - Analog input Current input (mA): 4 to 20 or 0 to 20 Voltage input (V): 1 to 5, 0 to 5, or 0 to 10
Input impedance		Current input: 150 Ω max., Voltage input: 1 MΩ min. (Use a 1:1 connection when connecting the ES2-HB/THB.)
Control method		ON/OFF control or 2-PID control (with auto-tuning)
Indication accuracy (ambient temperature of 23°C)		Thermocouple: *1 (±0.3% of PV or ±1°C, whichever is greater) ±1 digit max. Platinum resistance thermometer: (±0.2% of PV or ±0.8°C, whichever is greater) ±1 digit max. Analog input: ±0.2% FS ±1 digit max. CT input: ±5% FS ±1 digit max.
Auto-Tuning		Yes, 40%/10% MV output limit selection, When using Heat/Cool : Automatic cool gain adjustment
Self-Tuning		Yes
Control output	Relay output	SPST-NO, 250 VAC, 3 A (resistive load), electrical life; 100,000 operations minimum. applicable load: 5 V, 10 mA
	Voltage output (for driving SSR)	Output voltage 12 VDC ±20% (PNP), max. Load current: 21 mA, with short-circuit protection circuit
	Linear current output	4 to 20 mA DC/0 to 20 mA DC, load: 500 Ω max., resolution: Approx. 10,000
Auxiliary outputs	Number of outputs	2 (depends on model)
	Output specifications	SPST-NO relay outputs: 250 VAC, 2 A (resistive load), Electrical life: 100,000 operations, Minimum applicable load: 5 V, 10 mA
Event inputs	Number of inputs	1 (depends on model)
	External contact input specifications	Contact input ON: 1 kΩ max., OFF: 100 kΩ min. Non-contact input ON: Residual voltage 1.5 V max.; OFF: Leakage current 0.1 mA max. Current flow: approx. 7 mA per contact
Setting method		Digital setting using front panel keys
Indication method		11-segment digital displays and individual indicators Character height: PV 8.5 mm, SV: 8.0 mm
Multi SP		Up to eight set points (SPO to SPT) can be saved and selected using event inputs, key operations, or serial communications.*
Other functions		Manual output, heating/cooling control, loop burnout alarm, SP ramp, other alarm functions, heater burnout (HB) alarm (including SSR failure (HB) alarm), 40% AT, 100% AT, MV limiter, input digital filter, self tuning, robust tuning, PV input shift, run/stop, protection functions, extraction of square root, MV change rate limit, simple calculations, temperature status display, simple programming, moving average of input value, and display brightness setting
Ambient operating temperature		-10 to 55°C (with no condensation or icing), for 3-year warranty: -10 to 50°C (with no condensation or icing)
Ambient operating humidity		25% to 85%
Storage temperature		-25 to 65°C (with no condensation or icing)
Degree of protection		Main unit: IP20, Terminal unit: IP00
Sampling Period		50 ms
Size in mm (H×W×D)		96x22.5x85

* Only two set points are selectable for event inputs.

USB communication cable E58-CIFQ2

	E5CC	E5EC	E5AC	E5DC
E58-CIFQ2	■	■	■	■
E58-CIFQ2-E	—	■	■	■

**E5CC/E5EC/E5AC optional tools**

Option	Order code
USB based configuration cable	E58-CIFQ2, E58-CIFQ2-E (for E5EC/E5AC/E5DC)
PC based configuration and tuning software	EST2-2C-MV4

OMRON Corporation Industrial Automation Company

Tokyo, JAPAN

Contact: www.ia.omron.com**Regional Headquarters****OMRON EUROPE B.V.**

Wegalaan 67-69-2132 JD Hoofddorp

The Netherlands

Tel: (31)2356-81-300/Fax: (31)2356-81-388

OMRON ASIA PACIFIC PTE. LTD.No. 438A Alexandra Road # 05-05/08 (Lobby 2),
Alexandra Technopark,
Singapore 119967
Tel: (65) 6835-3011/Fax: (65) 6835-2711**OMRON ELECTRONICS LLC**One Commerce Drive Schaumburg,
IL 60173-5302 U.S.A.
Tel: (1) 847-843-7900/Fax: (1) 847-843-7787**OMRON (CHINA) CO., LTD.**Room 2211, Bank of China Tower,
200 Yin Cheng Zhong Road,
PuDong New Area, Shanghai, 200120, China
Tel: (86) 21-5037-2222/Fax: (86) 21-5037-2200**Authorized Distributor:**© OMRON Corporation 2011-2013 All Rights Reserved.
In the interest of product improvement,
specifications are subject to change without notice.**Cat. No. H176-E1-03**

0613(1111)