



331 Ushers Road, Ballston Lake, NY 12019 USA
+1 (518) 877-5173, Fax +1 (518) 877-8346
email: sales@sixnet.com, www.sixnet.com


SixTRAK[®] 32-Channel Discrete Input Module

Double density I/O expansion for SIXNET controllers and RTUs

Select this SixTRAK[®] module when . . .

. . . reduced panel space and lowest cost are important requirements.

- 32 discrete inputs in a single compact module
- High density design saves space and reduces cost
- All inputs return to a common ground
- Isolation protects system from wiring faults
- True hot swap of modules in live systems
- DIN rail or direct panel mountable

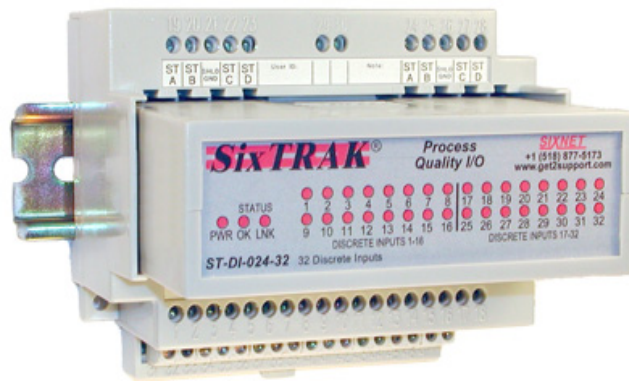

Performance Specifications	
Discrete inputs	32 channels
Voltage range	10-30 VDC (sinking or sourcing)
Guaranteed ON voltage	9 VDC
Maximum voltage	30 VDC
Guaranteed OFF current	1.5 mA DC
Guaranteed OFF voltage	5.0 VDC
Input resistance	10K Ohms
Input current @ 24VDC	3 mA
Fast ON/OFF delay	4 mS
Filtered ON/OFF delay	25 mS
Pulse counters	First four discrete inputs
Maximum count rate	100 Hz (or 20 Hz in filtered mode) 10 KHz on channel 1 only
Environmental	DIN rail or direct panel mounting
Input voltage	10-30 VDC
Max. ST-Bus power	850 mW
Isolation (input to ST-Bus)	1200 VDC
Operating temperature range	-40 to +70°C
Storage temperature range	-40 to +85°C
Humidity (non-condensing)	5 to 95% RH
Vibration IEC68-2-6	
Electrical safety	
EMI emissions	
EMC immunity	
Surge withstand	IEEE-472
Hazardous locations (Class 1, Div 2 and Zone 2)	UL1604, CSA C22.2/213; Cenelec EN50021, EEx nA II T4 X
Marine/offshore locations	Det Norske Veritas (DNV) No. 2.4 (Class A & B)

Ordering Information	
ST-DI-024-32D	Module and wiring base pair
ST-DI-024-32M	Replacement module only
ST-DI-024-32DB	Replacement base only



Specifications are subject to change. Consult factory for latest information.

Connect any mix of up to 20
SixTRAK[®] I/O modules to a
SixTRAK[®] I/O Controller,
VersaTRAK[®] Remote Terminal Unit,
or EtherTRAK[®] I/O Concentrator.




SixTRAK[®] IPm[™]
Open DCS Controller

ST-DI-024-32D Power and I/O Wiring

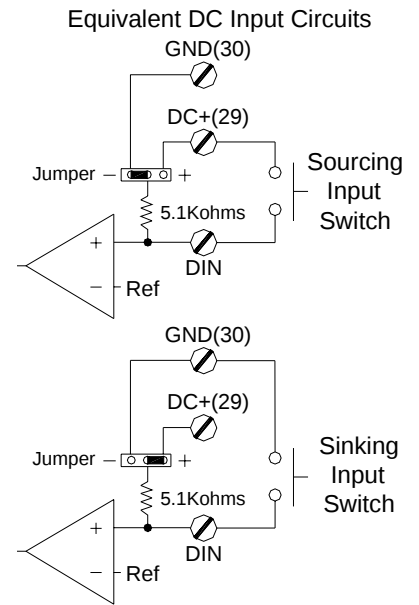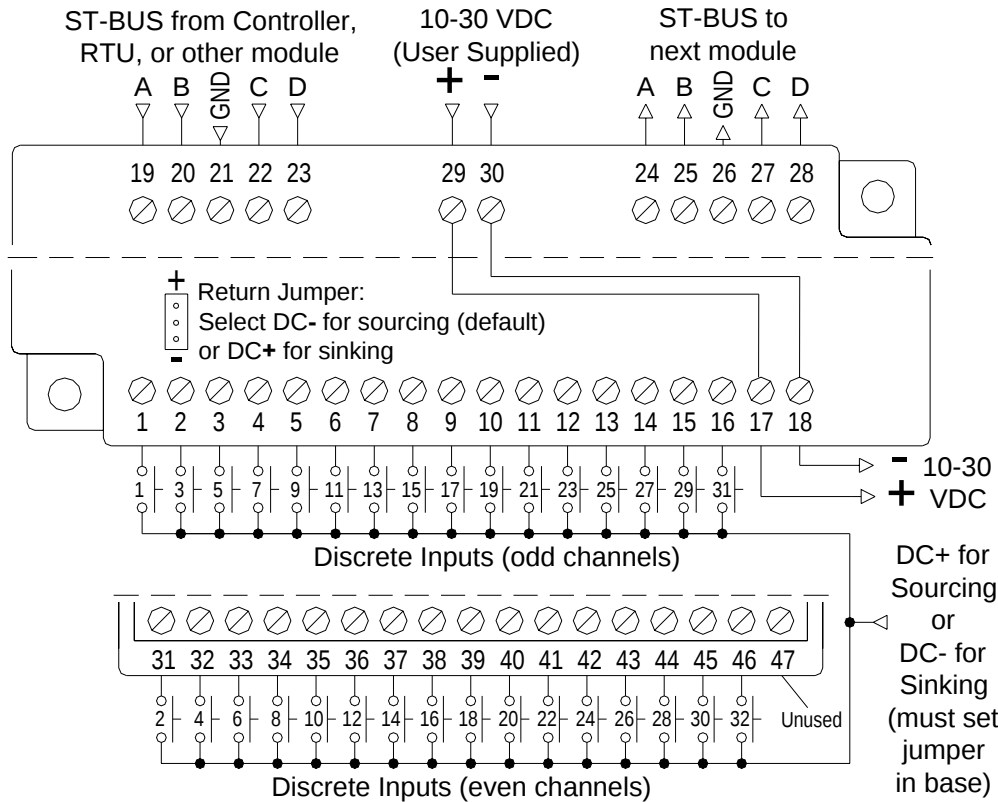

ST-DI-024-32D Mechanical Dimensions

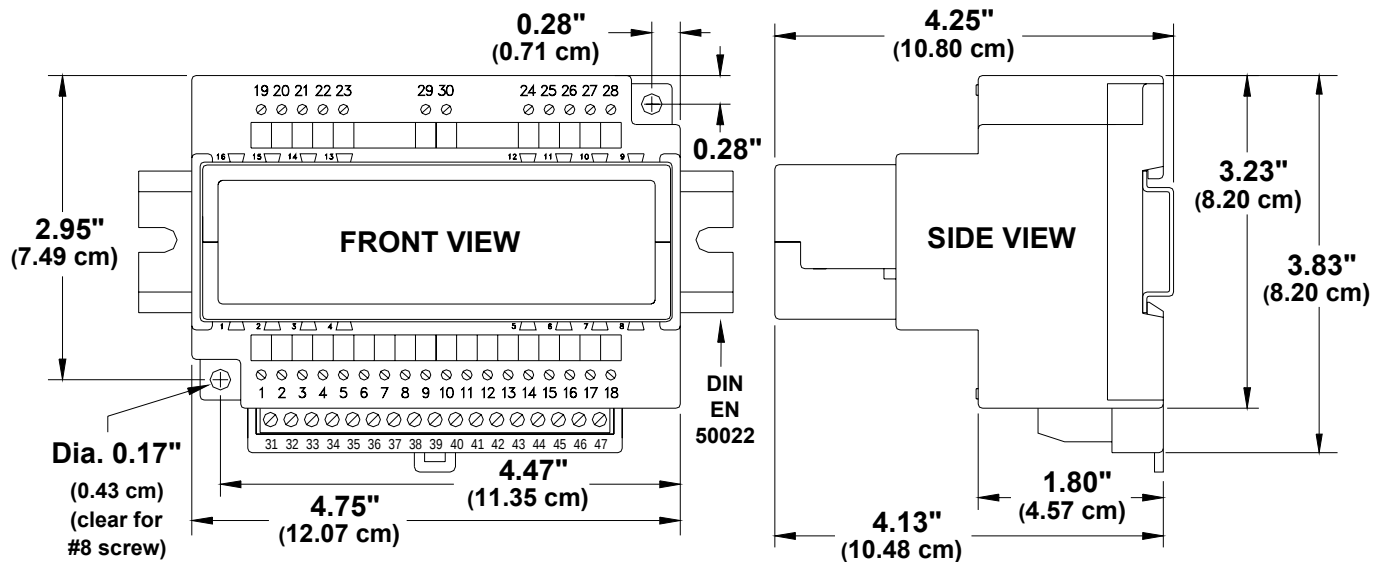

Rev. 5-Aug-04