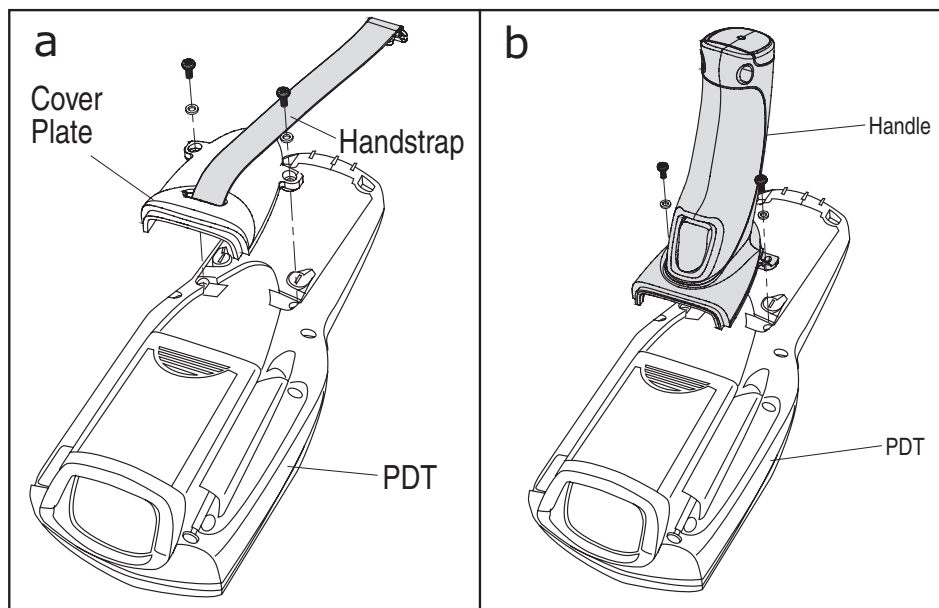


# Falcon® 4410/4420

## Handle Installation/Replacement Instructions

These instructions explain how to install or replace the Handle kit for the Falcon® models 4410/4420 Portable Data Terminals (PDT's).

1. Remove the Battery Door.
2. Turn the PDT face-down on a clean, dry surface.
3. Disconnect the Handstrap from the strap stud at the bottom of the Back Enclosure.
4. Using a Phillips screwdriver, remove the two screws holding the Cover Plate/Handstrap to the Back Enclosure (refer to Figure 1a). Retain the screws and washers for later reinstallation. Lift the Cover Plate/ Handstrap assembly from the unit.
5. Orient the Handle as shown in Figure 1b, and guide the recessed “lip” of the Handle into its corresponding opening in the PDT.
6. Set the Handle so that its “ears” fall into place. Press the trigger at least once to ensure that it "clicks."
7. Secure the Handle to the PDT using the two original screws and washers. Torque to 4 in-lbs.
8. Reinstall the Battery Door. Installation is complete upon successful unit test.



**Figure 1**

