


## CQM1-M Models

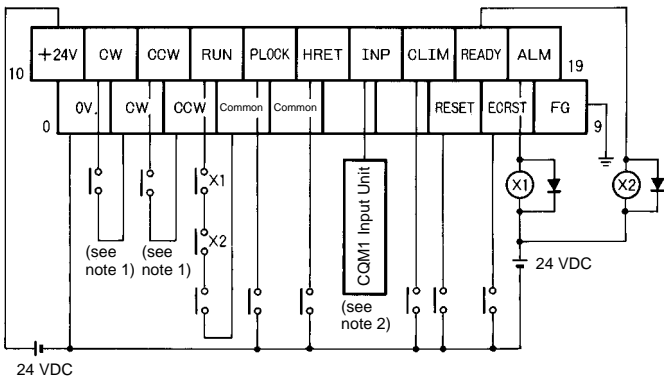

- Note:**
1. When this signal is input, the output pulses of the CQM1 can be input to the high-speed counters directly.
  2. Input this signal output to the CQM1 Input Unit.
  3. The XB contact is used to turn the electromagnetic brake on and off.
  4. Phase Z is an open collector output.
  5. The open terminal must be left unconnected.
  6. 0-V and common terminals are connected internally.
  7. The suitable crimp terminal is R1.25-3 (round or fork type).