


19" Industrial Routing Switch

RFIR-219-F4G-T7G-AC

- ⌘ High performance and configurable
 - 19 ports including 11 gigabit ports
 - Powerful dual core CPU
 - Advanced WeOS layer3 functionality
- ⌘ Designed for demanding Edge Network applications
 - Low power consumption AC power supply
 - Highly configurable fault I/O contact
 - Ultra-robust IP 40 19" rack/wall-mount housing
- ⌘ Robust and reliable for long service life
 - 123 000 hours MTBF to MIL-HDBK-217K
 - -40 to +55 °C without ventilation holes
 - Industrial and trackside type tested
- ⌘ Unique future proof industrial networking solutions
 - Simple web configuration with professional CLI
 - Network IP Security and remote access
 - Multiple network resilience solutions

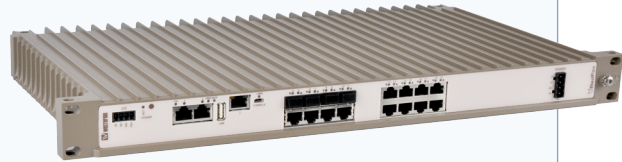

EN 50121-4
Railway Trackside

EN 55022
ITE Emission

EN 55024
ITE Immunity

EN 61000-6-1
Residential Immunity

EN 61000-6-2
Industrial Immunity

EN 61000-6-4
Industrial Emission

The RFIR (RedFox Industrial Rack) is a high performance layer 3 industrial Ethernet switch designed for high network traffic applications. Various port configurations are available that can be further customised with SFP transceivers. RFIR is powered by the Westermo WeOS network operating system.

RFIR is designed for 19" cabinet according to ETSI standard making it suitable for use in control room networks as well as for cabinets installed along railway trackside installations. RFIR is designed to run efficiently from an AC power supply; the unit is also equipped with configurable I/O fault contact that make it ideal for easy installation and monitoring in industrial applications.

Only industrial grade components are used which gives the RedFox an MTBF of 123 000 hours and ensures a long service life. A wide operating temperature range -40 to +55 °C (-40 to +131 °F) can be achieved with no moving parts or cooling holes in the case. RFIR has been tested both by Westermo and external test houses to meet many EMC, isolation, vibration and shock standards, all to the highest levels suitable for heavy industrial environments and rail trackside application.

WeOS has been developed by Westermo to allow us to offer cross platform and future proof solutions. WeOS can deliver unique IP security functionality for this class of product, for instance a Multiport DMZ can be constructed by utilising the internal port based firewall function. Remote secure access to a network can be provided using encrypted VPNs.


For more WeOS functionality, please see the WeOS datasheet.

Ordering Information

Art.no	Description
3641-4015	RFIR-219-F4G-T7G-AC, Industrial routing switch

RFIR-219-F4G-T7G-AC

Dimensional drawing

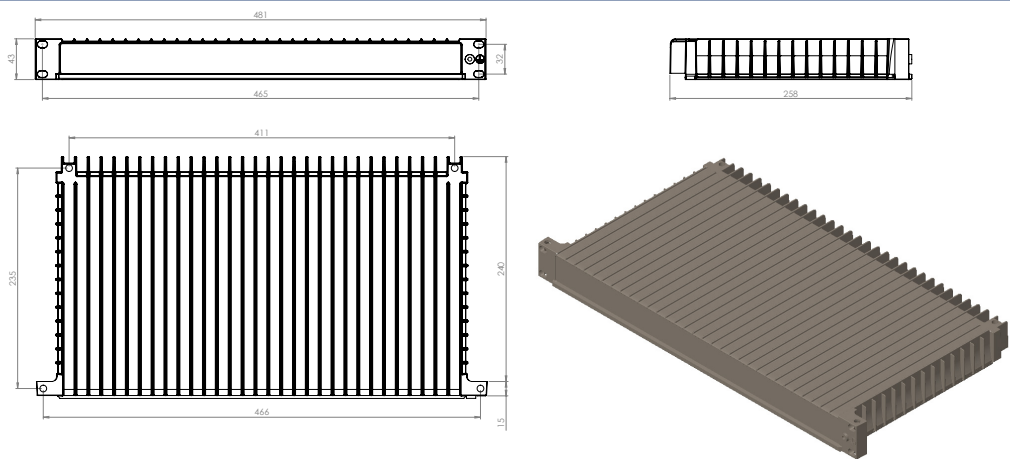

Dimension 466x258x43 mm
Weight 3,8 kg
Degree of protection IP40

Power	
Operating voltage	100 to 240 VAC 50 to 60 Hz
Rated current	350 mA @ 100 VAC 50 Hz
	210 mA @ 240 VAC 60 Hz

Interfaces	
Console	1 x USB Micro-B connector
USB	1 x USB 2.0 host interface
Digital I/O	1 x 4-ports detachable screw terminal
Ethernet	7 x 10/100/1000 Mbit/s, Ethernet TX, RJ-45
	4 x 100 or 1000 Mbit/s, pluggable connections, Ethernet FX or TX SFP
	8 x 10/100 Mbit/s, Ethernet TX, RJ-45

Temperature	
Operating	-40 to +55 °C (-40 to +131 °F)
Storage & Transport	-40 to +85 °C (-40 to +185 °F)
Maximum surface temperature	135°C (275°F) (temperature class T4)

Agency approvals and standards compliance	
EMC	EN 50121-4, Railway applications - Electromagnetic compatibility - Emission and immunity of the signalling and telecommunications apparatus
	EN 55022, Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement
	EN 55024, Information technology equipment - Immunity characteristics - Limits and methods of measurement
	EN 61000-6-1, Electromagnetic compatibility - Immunity for residential, commercial and light-industrial environments
	EN 61000-6-2, Electromagnetic compatibility - Immunity for industrial environments
	EN 61000-6-4, Electromagnetic compatibility - Emission for industrial environments
	IEC 62236-4, Railway signalling and telecommunications apparatus
Safety	UL/IEC/EN 60950-1, IT equipment
Marine	DNV GL rules for classification – Ships and offshore units